


REV	DATE	NOTES
A	7/30/07	Initial Release
B	11/15/13	Specifications updated per ANSI/UL 62275 update

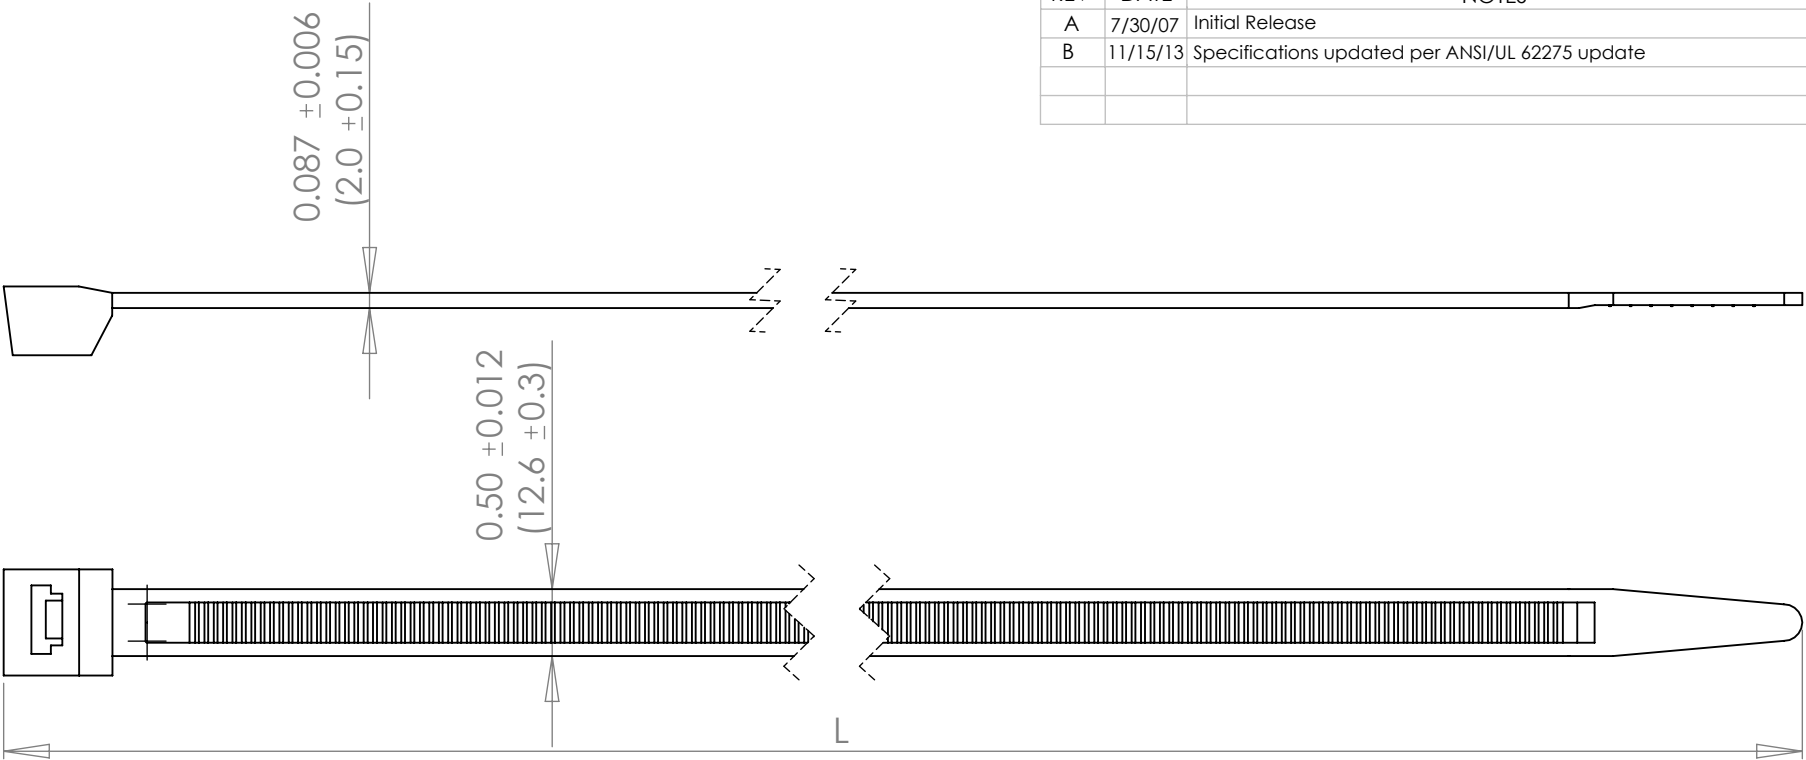

Model Number	Approx Length "L"	Min Bundle Diameter	Max Bundle Diameter
CT9-250	9" (230mm)	0.551" (14mm)	1.97" (50mm)
CT18-250	18.5" (480mm)		2.72" (120mm)
CT23-250	23" (580mm)		5.98" (152mm)
CT29-250	29" (730mm)		8.03" (204mm)
CT35-250	34.5" (880mm)		9.84" (250mm)
CT40-250	40.5" (1030mm)		11.49" (292mm)

*Suffix "-9" indicates Natural and "-0W" indicates UV Black
*See Cambridge Catalog for Packaging Options and Designations

- Notes:
1. Minimum Loop Tensile Strength: 250lb (1112N)
 2. Operating Temperature: -4°F to 185°F (-20°C to 85°C)
 3. Minimum Installation Temperature: 5°F (-15°C)
 4. UV Black ties are rated for outdoor use per ANSI/UL 62275
 5. Usage Recommendations: The cable ties must be stored at room temperature in at least 50% humidity (recommended 80%RH) in a completely sealed polyethylene bag if not being used. In extreme heat and cold, limit the exposure of unused cable ties. If after being exposed to extreme temperatures and/or extreme relative humidities, the cable ties must be allowed to be stored at room temperature and at least 50% humidity (recommended 80%RH) for at least 24 hrs in a sealed bag before being used again

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF **CAMBRIDGE RESOURCES**. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF **CAMBRIDGE RESOURCES** IS PROHIBITED.

	NAME	DATE	CAMBRIDGE 960 Alabama Ave, Brooklyn, NY 11207 P:718-649-1666 F:718-485-4403			
DRAWN	J Li	7/30/07				
UNLESS OTHERWISE SPECIFIED:			TITLE: Cambridge Cable Ties 250lb Tensile Strength			
DIMENSIONS ARE IN INCHES [] DENOTES MILLIMETER						
MATERIAL Nylon 6,6 94V-2			SIZE DWG. NO. REV A CT-250 REV B B			
FINISH						
DO NOT SCALE DRAWING			SCALE: 1:1		WEIGHT:	SHEET 1 OF 1