


REV	DATE	NOTES
A	10/17/16	Initial Release

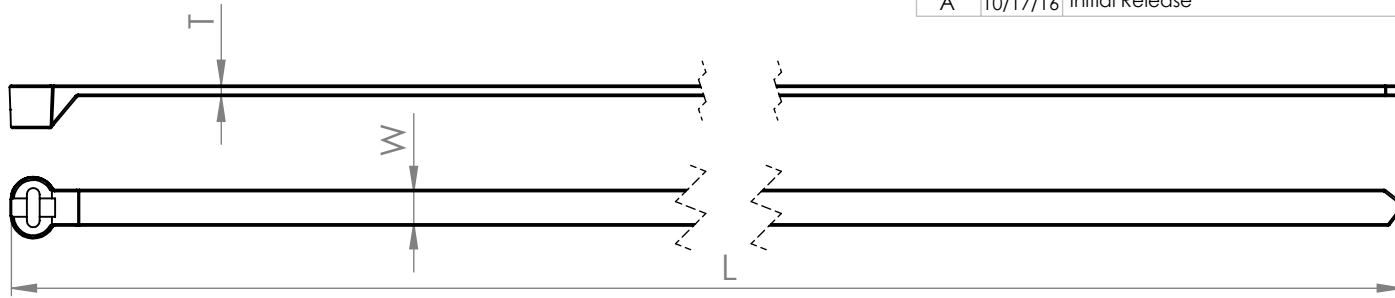

Model Number	Approx Length L	W ±0.01"	T ±0.01"	Min Bundle Diameter	Max Bundle Diameter	Loop Tensile Strength
CTHS4-18	4" (100)	0.09" (2.4)	0.04" (1.0)	0.08" (2)	0.91" (23)	18 lbs
CTHS8-18	8" (200)	0.09" (2.4)	0.04" (1.0)	0.08" (2)	2.00" (50)	18 lbs
CTHS6-40	6" (155)	0.14" (3.6)	0.05" (1.3)	0.12" (3)	1.38" (35)	40 lbs
CTHS11-40	11" (284)	0.14" (3.6)	0.05" (1.3)	0.12" (3)	3.15" (80)	40 lbs
CTHS7-50	7" (186)	0.19" (4.8)	0.06" (1.5)	0.14" (3.5)	1.77" (45)	40 lbs
CTHS8-50	8" (200)	0.24" (6.0)	0.06" (1.5)	0.20" (5)	1.97" (50)	50 lbs
CTHS11-50	11" (295)	0.19" (4.8)	0.06" (1.5)	0.14" (3.5)	3.19" (81)	50 lbs
CTHS14-50	14" (361)	0.19" (4.8)	0.06" (1.5)	0.14" (3.5)	3.94" (100)	50 lbs
CTHS15-50	15" (376)	0.19" (4.8)	0.06" (1.5)	0.14" (3.5)	4.21" (107)	50 lbs
CTHS15-120	15" (400)	0.39" (10)	0.07" (1.7)	0.55" (14)	4.29" (109)	120 lbs
CTHS18-120	18" (450)	0.39" (10)	0.07" (1.7)	0.55" (14)	4.88" (124)	120 lbs
CTHS28-120	28" (699)	0.28" (7)	0.06" (1.6)	0.24" (6)	7.99" (203)	120 lbs
CTHS30-120	30" (780)	0.28" (7)	0.06" (1.6)	0.24" (6)	9.06" (230)	120 lbs

Suffix "-9" indicates Natural, "-0W" indicates UV Black, and "-HS" indicates Heat Stabilized  
 Operating Temperatures: Standard -40°F to 185°F (-40°C to 85°C)  
 Heat Stabilized -40°F to 248°F (-40°C to 120°C)  
 See Cambridge Catalog for Packaging Options and Designations  
 UL File E257228

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF **CAMBRIDGE RESOURCES**. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF **CAMBRIDGE RESOURCES** IS PROHIBITED.

NAME	DATE	<b>CAMBRIDGE</b> 960 Alabama Ave, Brooklyn, NY 11207 P:718-649-1666 F:718-485-4403
DRAWN RH	10/17/16	
UNLESS OTHERWISE SPECIFIED:		TITLE:
DIMENSIONS ARE IN INCHES [ ] DENOTES MILLIMETER		Cambridge Cable Ties Headstrong Steel Pawl
MATERIAL	94V-2	SIZE
Nylon 6,6		DWG. NO.
FINISH		CTHSXX-XX Rev A
DO NOT SCALE DRAWING		REV
		A
		SHEET 1 OF 1