


REV	DATE	NOTES
A	10/17/06	Initial Release: HW
B	4/6/11	CT17-120 Bundle Diameter update per UL Listing: JG
C	11/15/13	Specifications updated per ANSI/UL 62275 update

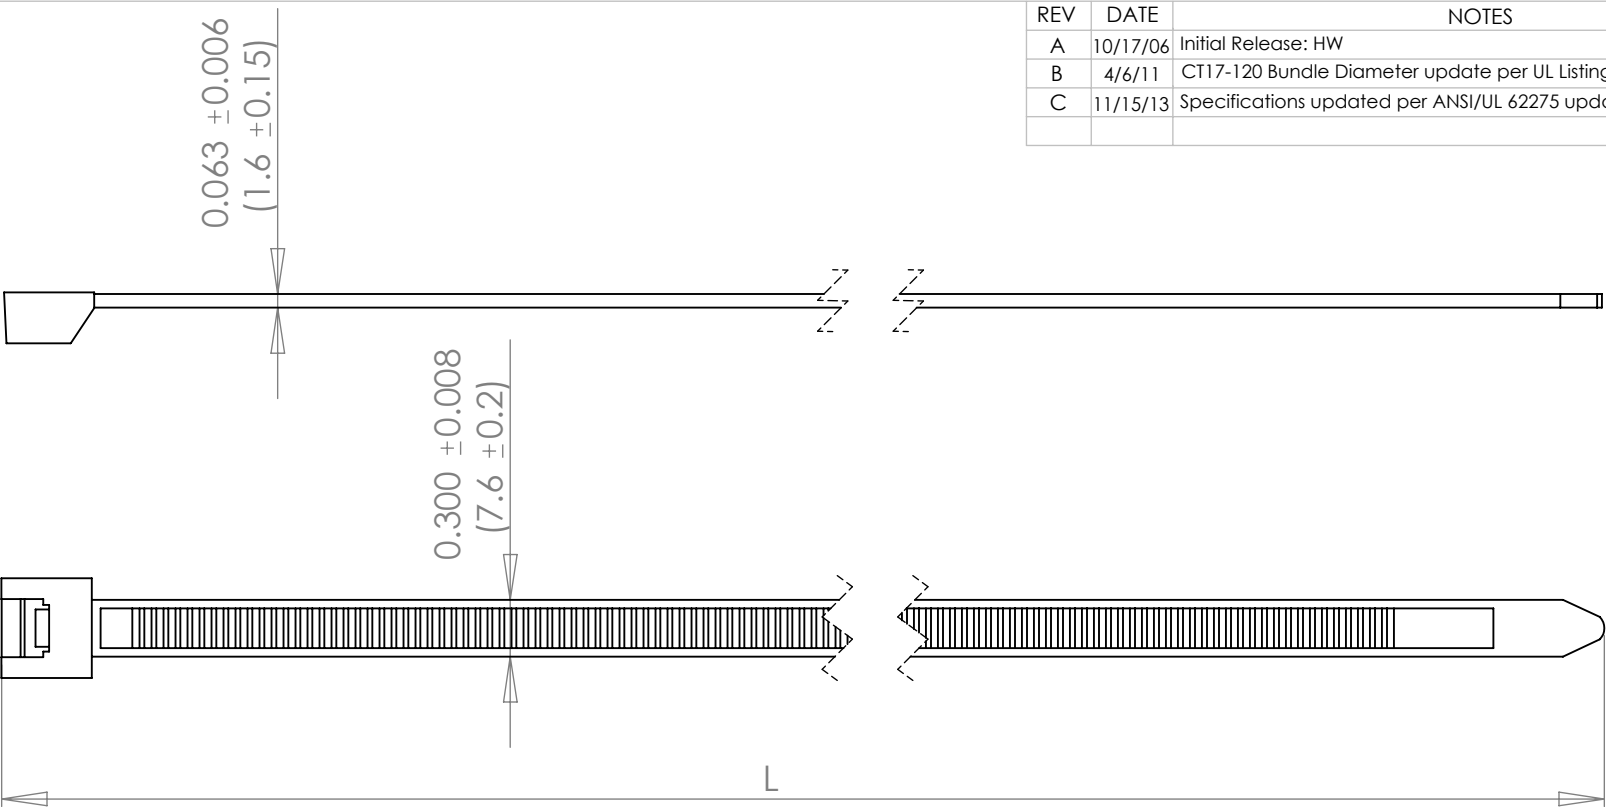

Model Number	Approx Length "L"	Min Bundle Diameter	Max Bundle Diameter
CT8-120	8" (200mm)	0.551" (14mm)	1.969" (50mm)
CT11-120	11.5" (300mm)		2.992" (76mm)
CT14-120	14.5" (370mm)		4.016" (102mm)
CT17-120	17" (430mm)		4.843" (123mm)
CT21-50	21" (530mm)		5.512" (140mm)

*Suffix "-9" indicates Natural and "-0W" indicates UV Black
*See Cambridge Catalog for Packaging Options and Designations

- Notes:
- Minimum Loop Tensile Strength: 120lb (530N)
 - Operating Temperature: -4°F to 185°F (-20°C to 85°C)
 - Minimum Installation Temperature: 5°F (-15°C)
 - UV Black ties are rated for outdoor use per ANSI/UL 62275
 - Usage Recommendations: The cable ties must be stored at room temperature in at least 50% humidity (recommended 80%RH) in a completely sealed polyethylene bag if not being used. In extreme heat and cold, limit the exposure of unused cable ties. If after being exposed to extreme temperatures and/or extreme relative humidities, the cable ties must be allowed to be stored at room temperature and at least 50% humidity (recommended 80%RH) for at least 24 hrs in a sealed bag before being used again

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF **CAMBRIDGE RESOURCES**. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF **CAMBRIDGE RESOURCES** IS PROHIBITED.

		NAME	DATE	<div>CAMBRIDGE</div> <div>960 Alabama Ave, Brooklyn, NY 11207 P:718-649-1666 F:718-485-4403</div>		
DRAWN	J Li	10/17/06				
UNLESS OTHERWISE SPECIFIED:				TITLE:		
DIMENSIONS ARE IN INCHES [] DENOTES MILLIMETER				Cambridge Cable Ties 120lb Tensile Strength		
MATERIAL Nylon 6,6 94V-2				SIZE A	DWG. NO. CT-120 REV C	REV C
FINISH						
DO NOT SCALE DRAWING				SHEET 1 OF 1		