


FLAG TIE  
TYPE 1

HORIZONTAL  
TYPE 2

VERTICAL  
TYPE 3

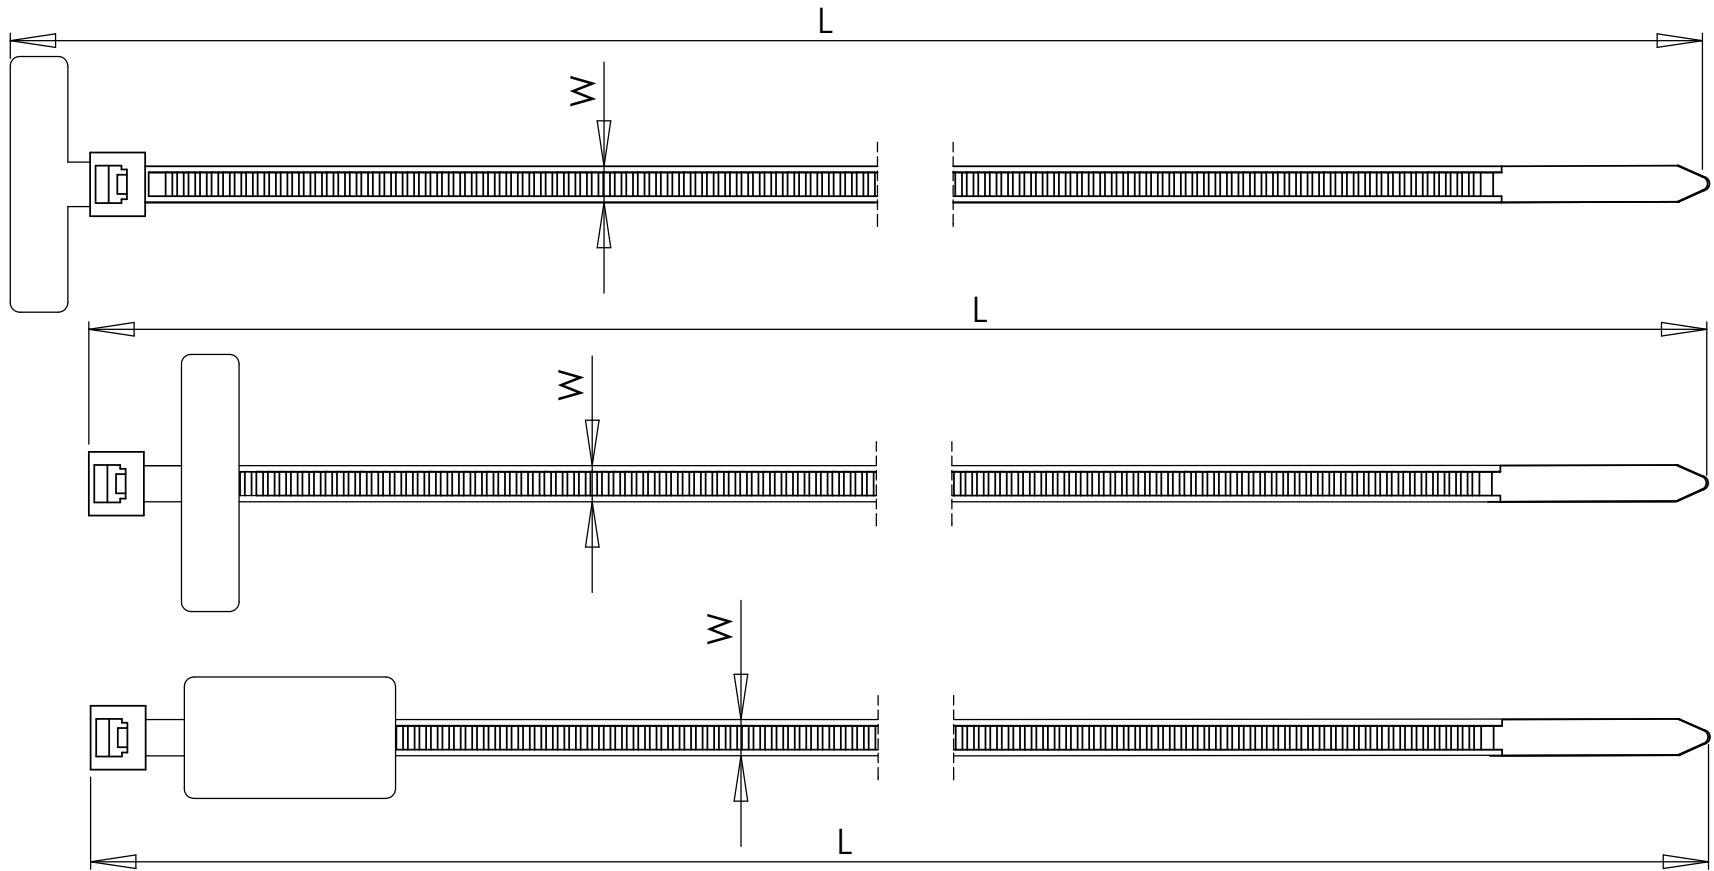

Cambridge Part#	Length (L)	Width (W)	Thickness (T)	Max Bundle Dia.	Tensile Strength (lbs)	Write-On Area
CTID4-1-18	4.4 [112]	0.10 [2.5]	0.05 [1.2]	0.71 [18]	18	1.0 [25] x 0.3 [8]
CTID4-2-18	4.0 [100]	0.10 [2.5]	0.05 [1.2]	0.71 [18]	18	1.0 [25] x 0.3 [8]
CTID7-3-18	7.5 [190]	0.19 [4.8]	0.05 [1.3]	1.81 [46]	50	1.1 [28] x 0.5 [13]
CTID11-3-18	10.6 [270]	0.19 [4.8]	0.05 [1.3]	2.56 [65]	50	1.1 [28] x 0.5 [13]

\*Please Inquire About Other Sizes Not Listed  
\*\*See Cambridge Catalog for Colors and Packaging Options



**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CODA RESOURCES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CODA RESOURCES IS PROHIBITED.

Rated Operating Temperatures:  
-40°F to 185°F (-40°C to 85°C)

Usage Recommendations:

The cable ties must be stored at room temperature in at least 50% humidity (recommended 80%RH) in a completely sealed polyethylene bag if not being used. In extreme heat and cold, limit the exposure of unused cable ties. If after being exposed to extreme temperatures and/or extreme relative humidities, the cable ties must be allowed to be stored at room temperature and at least 50% humidity (recommended 80%RH) for at least 24 hrs in a sealed bag before being used again

	NAME	DATE	<b>CAMBRIDGE</b>		
DRAWN	RH	10/08/10			
UNLESS OTHERWISE SPECIFIED:			960 Alabama Ave, Brooklyn, NY 11207 P:718-649-1666 F:718-485-4403		
DIMENSIONS ARE IN INCHES [ ] DENOTES MILLIMETER			TITLE: Cambridge ID Marker Ties 18lb and 50lb Tensile Strength		
MATERIAL Nylon 6,6 94V-2					
FINISH			SIZE <b>A</b>	DWG. NO. CTID REV A	REV A
DO NOT SCALE DRAWING			WEIGHT:		SHEET 1 OF 1