


REV	DATE	NOTES
A	9/30/14	Initial Release: JG

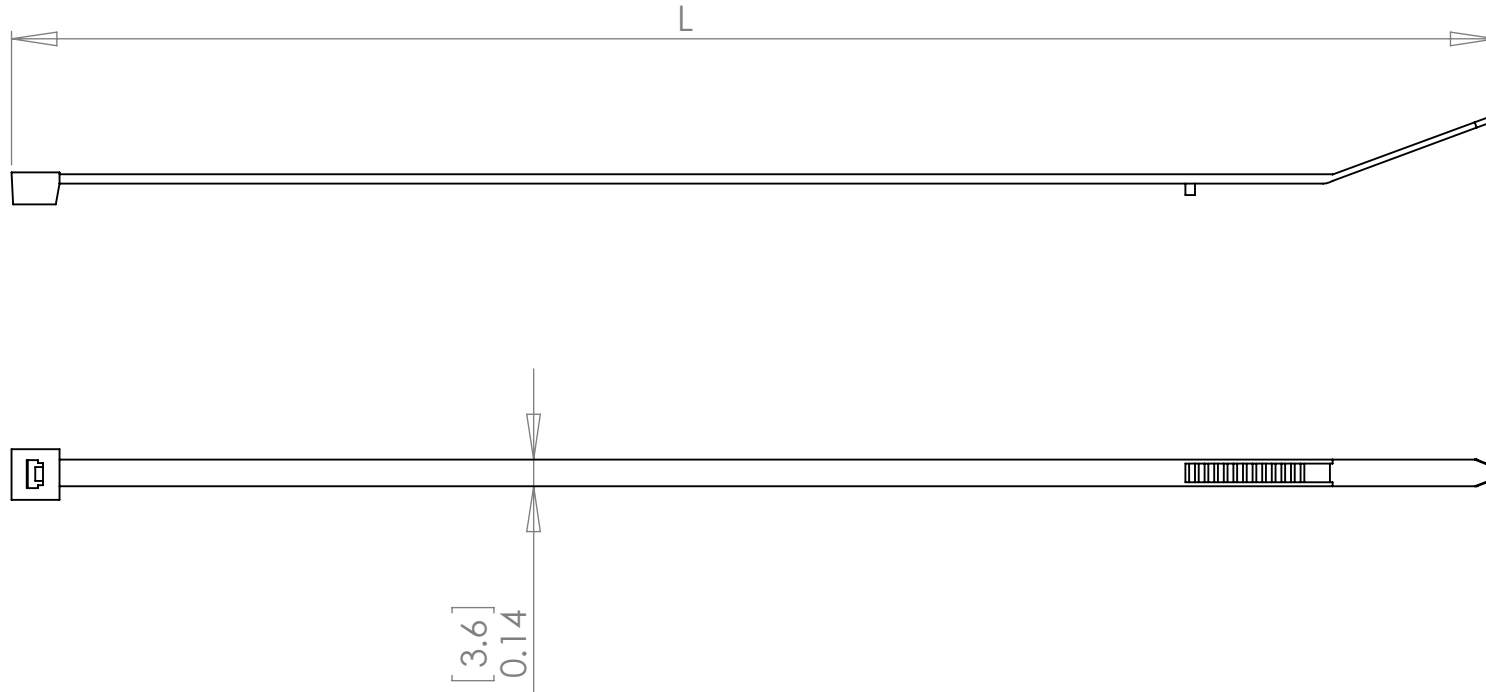

Model Number	Approx Length "L"	Tensile Strength	Bundle Diameter
CBT11WST	11" (300mm)	40 lbs	3.2" (82mm)
CBT24WST	24" (600mm)	18 lbs	6.9" (175mm)
CBT31WST	31.5" (800mm)	18 lbs	9.3" (235mm)

\*Suffix "-9" indicates Natural and "-0W" indicates UV Black  
\*See Cambridge Catalog for Packaging Options and Designations

Notes:

1. Operating Temperature: -4°F to 185°F (-20°C to 85°C)
2. Minimum Installation Temperature: 5°F (-15°C)
3. UV Black ties are rated for outdoor use per ANSI/UL 62275
4. Usage Recommendations: The cable ties must be stored at room temperature in at least 50% humidity (recommended 80%RH) in a completely sealed polyethylene bag if not being used. In extreme heat and cold, limit the exposure of unused cable ties. If after being exposed to extreme temperatures and/or extreme relative humidities, the cable ties must be allowed to be stored at room temperature and at least 50% humidity (recommended 80%RH) for at least 24 hrs in a sealed bag before being used again

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF **CAMBRIDGE RESOURCES**. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF **CAMBRIDGE RESOURCES** IS PROHIBITED.

NAME	DATE	<b>CAMBRIDGE</b> 960 Alabama Ave, Brooklyn, NY 11207 P:718-649-1666 F:718-485-4403	
DRAWN RH	09/30/14		
UNLESS OTHERWISE SPECIFIED:		TITLE:	
DIMENSIONS ARE IN INCHES [ ] DENOTES MILLIMETER		Cambridge Cable Ties With Stop	
MATERIAL	SIZE	DWG. NO.	REV
Nylon 6,6 & Nylon 6	<b>A</b>	CBTxxWST	<b>A</b>
FINISH	DO NOT SCALE DRAWING		SHEET 1 OF 1