
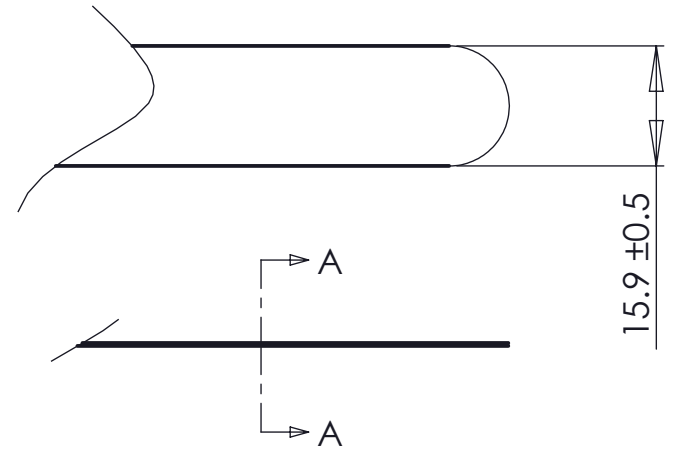


REV	DATE	NOTES
A	10/12/11	Initial Release

Roll Length = 82.5' ± 1'

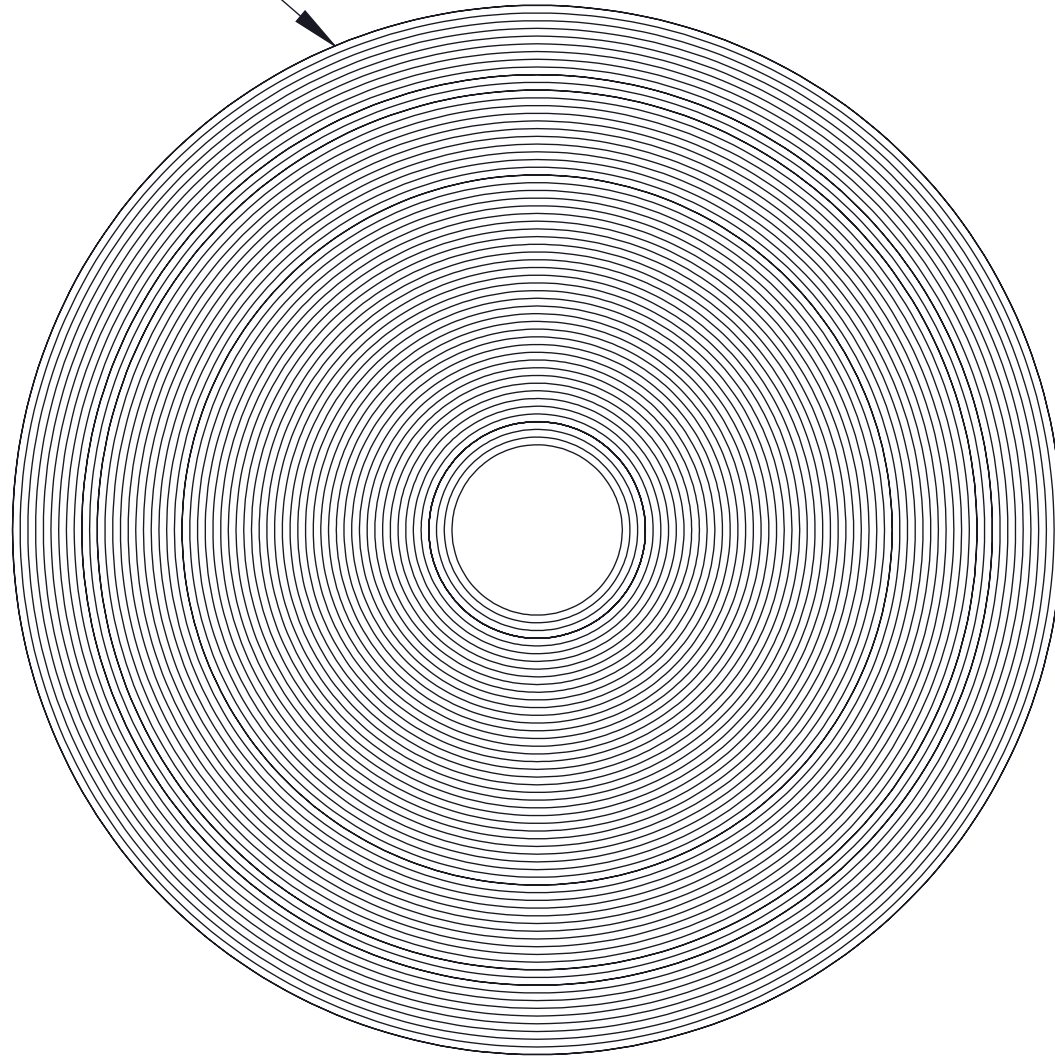

15.9 ± 0.5

1.2 ± 0.1 THICKNESS  
WITH PVC COATING



SECTIONS A-A  
SCALE 2:1

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF **CAMBRIDGE RESOURCES**. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF **CAMBRIDGE RESOURCES** IS PROHIBITED.

Notes:

- All components to be compliant with RoHS, California Proposition 65, EU REACH SVHC, and US Consumer Product Safety Commission directives for hazardous substances
- Avg Loop Tensile Strength = 840 lbs
- Parts to be free of burrs and sharp edges

DRAWN	CHECKED	DATE	<b>CAMBRIDGE</b>	
RH	RH	10/11/11	960 Alabama Ave, Brooklyn, NY 11207 P:718-649-1666 F:718-485-4403	
UNLESS OTHERWISE SPECIFIED:			TITLE: Cambridge 5/8" Marine Grade Stainless Steel Strapping - Coated	
DIMENSIONS ARE IN MILLIMETERS [ ] DENOTES INCHES SEE NOTES			SIZE	REV
MATERIAL SS316 AND PVC			DWG. NO.	SS58-MGC
FINISH SEE NOTES			<b>A</b>	<b>A</b>
DO NOT SCALE DRAWING			SCALE: 1:1	SHEET 1 OF 1