



# HVAC

# CATALOG

PREMIUM. INDUSTRIAL. PRODUCTS.



## FAMILY OWNED

Cambridge is wholly owned by Coda Resources, a family-owned and operated manufacturing and distribution company established 75 years ago by Abraham Tropper. Over the decades, we've built a reputation as a reliable, responsive manufacturing partner and supplier. Today, we manufacture over 17 billion pieces annually, serving a wide range of industries.

## MANUFACTURING

In 2020 we opened our newest wholly owned manufacturing facility in Ho Chi Minh Vietnam, where we manufacture many of the Cambridge Products you will find in this catalog. We also work with partner facilities where Coda teams regularly go on site to conduct detailed quality control reviews.

## QUALITY

We've been manufacturing goods for three-quarters of a century, so we know something about longevity and durability. Our engineers select the highest grade materials for optimal performance in their intended environment. Our priority is delivering unparalleled quality in every part.

**VISIT THE  
CODA  
RESOURCES  
WEBSITE TO  
LEARN MORE  
ABOUT OUR  
CUSTOM  
MANUFACTURING  
SERVICES  
AND OTHER  
HIGH-QUALITY  
BRANDS IN THE  
CODA  
RESOURCES  
FAMILY**

**CODARESOURCES.COM  
CAMBRIDGERESOURCES.COM**



Cambridge began in the 1990s as a duct strap supplier and has grown into one of the countries largest HVAC suppliers, offering over 4,000 different HVAC, plumbing and electrical products. We continue to respond to customer feedback, changing demands, and new technologies by constantly adding new products and services. Our main U.S. office is our communications hub, in daily contact with all of our teams around the world and provides unparalleled customer support for whatever your needs may be.

**THE CAMBRIDGE NAME HAS BEEN A TRUSTED NAME IN THE INDUSTRY FOR DECADES**

# 5-9

## AIR FLOW ACCESSORIES

Chip Brushes .....	9
Dryer Clamps .....	7
Duct Straps .....	5
Hanging Straps .....	6
Hose Clamps .....	8
Quick-Release Clamps .....	6-7
Tension Clamps .....	7
Tensioning Tools .....	5
Webbing .....	6
PEX Pinch Clamps .....	9
Pinch Clamp Crimper .....	9
Pinch Clamps .....	9

# 33-54

## HEATING PRODUCTS

Black Cut Steel Pipe .....	54
Black Malleable Iron Fittings .....	45-50
Black Merchant Couplings .....	54
Black Steel Nipples .....	51-53
Cloth Towels .....	50
Concentric Vent Kit .....	45
Dielectric Gas Union .....	44
Flare Fittings .....	44
Brass Flare Fittings .....	44
Steel Flare Fittings .....	44
Gas Connectors .....	34-42
Gas Test Gauge .....	45
Gas Valves .....	43
Pipe Displays .....	54

# 80-82

## CONDENSATE CONTROL

Condensate Drain Line Cleaning .....	81
Condensate Pumps .....	81
Condensate Switches .....	82
Drain Pan .....	82
Foam Insulation Tape .....	82
Foam Sealant .....	82
P-Trap .....	81
PVC Tubing .....	81

# 10-13

## PADS & MOUNTING SYSTEMS

A/C Brackets .....	12
Air Handler Block .....	12
Anti Vibration Pads .....	11
Condenser Pads .....	11
Furnace Mounting Block .....	12
Heat Pump Risers .....	12
Isolation Pads .....	11
Mounting Straps .....	13
Top Beam Clamp .....	12
Two-Hole Pipe Strap .....	13

# 55-73

## PLUMBING

ACR Copper Fittings .....	67-68
Flexible Couplings .....	71
Foam Insulation Tape .....	73
Foam Sealant .....	73
Galvanized Cut Steel Pipe .....	65
Galvanized Malleable Iron Fittings .....	56-61
Galvanized Steel Nipples .....	62-64
Garden Hose Fitting .....	67
Hose Clamps .....	69
Ice Maker Kit .....	73
Merchant Couplings .....	66
PEX Pinch Clamps .....	70
Pinch Clamp Crimper .....	70
Pinch Clamps .....	70
Pipe Displays .....	65
Pipe Repair Clamps .....	70
Pipe Support .....	71-72
Valves .....	66

# 14-31

## ELECTRICAL

Cable Clamps .....	20
Cable Staples .....	20
Cable Tie Mounts .....	20
Cable Ties .....	18-19
Electrical Disconnects .....	16
Electrical Supplies .....	16-18
Electrical Tools .....	30
Heat Shrink Tubing .....	29
Liquid-Tight Conduit & Fittings .....	15
Merchandising Display .....	31-32
Straps .....	21
Tape .....	22
Terminals .....	24-30
Wire Connectors .....	22-24
Whip Kits .....	15
Wire .....	21
Wire Protection .....	21

# 74-79

## REFRIGERANT COMPONENTS

Access Fittings .....	75
ACR Copper Fittings .....	75-77
Brass Flare Fittings .....	79
Garden Hose Fitting .....	79
Quick Connect Refrigerant Fittings .....	77-78
Refrigerant Locking Caps .....	75



# AIR FLOW ACCESSORIES

Chip Brushes .....	9	Tension Clamps .....	7
Dryer Clamps .....	7	Tensioning Tools .....	5
Duct Straps .....	5	Webbing.....	6
Stainless Steel.....	5	PEX Pinch Clamps.....	9
Standard .....	5	Pinch Clamp Crimper.....	9
Hanging Straps .....	6	Pinch Clamps.....	9
Galvanized Straps.....	6		
Plastic Straps.....	6		
Hose Clamps.....	8		
Quick-Release Clamps.....	6-7		
Black Coated.....	7		
High Torque.....	7		
Standard .....	6		

# DUCT SUPPORT

## DUCT STRAPS



### Spec:

- 175lb tensile strength
- 6/6 nylon
- 0.35" / 9mm width
- UL 181B-C

- 24" - 48" 175lb Duct Straps are ANSI/UL 181B compliant
- Tested to UL 2043, "Fire Test for Heat and Visible Smoke Release for Discrete Products and Their Accessories Installed in Air-Handling Spaces"
- Suitable for use in plenums in accordance with the "International Mechanical Code", "Uniform Mechanical Code," and ANSI/NFPA 90A, "Installation of Air-Conditioning and Ventilating Systems"



ITEM#	SKU#	LENGTH Inches (mm)	BUNDLE DIAMETER Inches (mm)	COLOR	UOM	ORDER MULTIPLE	MASTER QTY
105597	CT24-175K9-B	24 (630)	7.1 (180)	Natural	Bag of 50	10	10
105596	CT24-175K0W-B	24 (630)	7.1 (180)	UV Black	Bag of 50	10	10
105599	CT32-175K9-B	32 (830)	9.4 (239)	Natural	Bag of 50	10	10
105056	CT32-175K0W	32 (830)	9.4 (239)	UV Black	Bag of 50	10	10
105570	CT36-175K9-B	36 (920)	10.3 (263)	Natural	Bag of 50	10	10
106234	CT36-175K0W-B	36 (920)	10.3 (263)	UV Black	Bag of 50	10	10
105840	CT48-175K9-B	48 (1220)	14.4 (365)	Natural	Bag of 50	10	10
106235	CT48-175K0W-B	48 (1220)	14.4 (365)	UV Black	Bag of 50	10	10
108959	CT48-175X0W-B	48 (1220)	14.4 (365)	UV Black	Bag of 25	20	20
110594	CT53-175X9	53 (1370)	16.2 (412)	Natural	Bag of 25	20	20
112411	CT53-175X0W-C	53 (1370)	16.2 (412)	UV Black	Bag of 25	20	20
106337	CT60-175K9	60 (1530)	18.1 (460)	Natural	Bag of 50	10	10
109831	CT60-175K0W	60 (1530)	18.1 (460)	UV Black	Bag of 50	10	10



## INDUSTRIAL GRADE STAINLESS STEEL DUCT STRAPS

### Spec:

- All weather
- For use with commercial high-velocity flex
- Stainless steel
- 175lb tensile strength

ITEM#	LENGTH Inches (mm)	BUNDLE DIAMETER Inches (mm)	PACK QTY	ORDER MULTIPLE	MASTER QTY
200218	36 (914)	10.35 (263)	Bag of 50	10	10

Cambridge stainless steel industrial-grade ties are designed to withstand extreme temperatures and resist corrosion.



## TENSIONING TOOLS

### TENSIONING TOOL FOR DUCT STRAPS

#### Spec:

- Designed to work with 40lb-175lb ties/straps

**ITEM# 200060 UOM: 1 ORDER MULTIPLE: 10 MASTER QTY: 40**  
Cambridge Tensioning Tool for Duct Straps installs nylon ties around bundles quickly and safely. It has an easy-to-operate cut-off mechanism that trims excess strap. The non-slip cushioned handles are perfect for comfort and control.



### PREMIUM CABLE TIE TENSIONING TOOL FOR DUCT STRAPS

#### Spec:

- Designed to work with 40lb-175lb ties/straps

**ITEM# 200551 UOM: 1 ORDER MULTIPLE: 1 MASTER QTY: 42**  
Cambridge Premium Cable Tie Tensioning Tool for Duct Straps has an easy-to-read tension setting window, an automatic cut-off mechanism that trims excess strap, and non-slip cushioned grips for maximum comfort and control.



AIR FLOW ACCESSORIES

## WEBBING



- Cambridge Duct Support Webbing makes hanging HVAC flexible duct quick and easy
- Durable, simple, and economical




ITEM#	SKU#	WIDTH Inches (mm)	ROLL LENGTH Feet	COLOR	UOM	ORDER MULTIPLE	MASTER QTY
105136	PS134S	1-3/4 (44.5)	300	Silver	1 Roll	24	24
105545	PS134B-50	1-3/4 (44.5)	50	Black	1 Roll	24	96
105135	PS134B	1-3/4 (44.5)	300	Black	1 Roll	24	24
108838	PS134B-RS	1-3/4 (44.5)	300	Black with Red Stripe	1 Roll	24	24
105138	PS3S	3 (76)	300	Silver	1 Roll	8	8
105137	PS3B	3 (76)	300	Black	1 Roll	8	8

Spec:

- UL2043

## HANGING STRAPS

### PLASTIC STRAPS



ITEM#	SKU#	WIDTH Inches (mm)	ROLL LENGTH Feet	COLOR	UOM	ORDER MULTIPLE	MASTER QTY
112427	WE11889	3/4 (19)	100	Gray	1 Roll	30	30

Spec:

- Made of polypropylene
- Flexible
- Non-conductive

### GALVANIZED STRAPS



Cambridge galvanized duct straps resist corrosion in extreme conditions, and come in a convenient dispensing box.

ITEM#	SIZE	GAUGE	UOM	ORDER MULTIPLE	MASTER QTY
200595	1" x 100'	26	1 Roll	1	1
200596	1" x 100'	30	1 Roll	1	1

Spec:

- Galvanized
- Corrosion-resistant

## QUICK RELEASE CLAMPS


### QUICK-RELEASE CLAMPS



ITEM#	SKU#	SAE SIZE	CLAMPING DIAMETER Inches	LENGTH Inches (mm)	BAND WIDTH Inches (mm)	UOM	ORDER MULTIPLE	MASTER QTY
105734	QR-104PB	104	1-3/4 - 7	22 (559)	1/2 (12.7)	1	50	200
105866	QR-128PB	128	1-3/4 - 8-1/2	27 (686)	1/2 (12.7)	1	50	100
105867	QR-152PB	152	1-3/4 - 10	31 (787)	1/2 (12.7)	1	50	100
105868	QR-188PB	188	1-3/4 - 12-1/4	38 (965)	1/2 (12.7)	1	50	100
105869	QR-232PB	232	1-3/4 - 15	47 (1194)	1/2 (12.7)	1	50	100
105870	QR-258PB	258	1-3/4 - 16-1/4	51 (1295)	1/2 (12.7)	1	50	100
105871	QR-288PB	288	1-3/4 - 18-1/2	57 (1448)	1/2 (12.7)	1	50	100
105872	QR-312PB	312	1-3/4 - 20	63 (1600)	1/2 (12.7)	1	50	100

Spec:

- Stainless steel band with zinc plated screw
- Designed to exceed 40 inch-pounds of torque



## QUICK RELEASE CLAMPS CONTINUED

### HIGH-TORQUE QUICK-RELEASE CLAMPS



ITEM#	SKU#	SAE SIZE	CLAMPING DIAMETER Inches	LENGTH Inches (mm)	BAND WIDTH Inches (mm)	UOM	ORDER MULTIPLE	MASTER QTY
106160	QR3-152PBP	152	1-3/4 - 10	31 (787)	9/16 (14.3)	1	50	100
106084	QR-188PBP	188	1-3/4 - 12-1/4	38 (965)	1/2 (12.7)	1	50	100
106256	QR3-188PBP	188	1-3/4 - 12-1/4	38 (965)	9/16 (14.3)	1	50	100

#### Spec:

- Stainless steel band with zinc plated screw
- Designed to exceed 80 inch-pounds of torque

### BLACK-COATED QUICK-RELEASE CLAMPS



ITEM#	SKU#	SAE SIZE	CLAMPING DIAMETER Inches	LENGTH Inches (mm)	BAND WIDTH Inches (mm)	UOM	ORDER MULTIPLE	MASTER QTY
107449	QR-104PB-C	104	1-3/4 - 7	31 (787)	1/2 (12.7)	1	50	200
107450	QR-152PB-C	152	1-3/4 - 10	31 (787)	1/2 (12.7)	1	50	100
107451	QR-188PB-C	188	1-3/4 - 12-1/4	38 (965)	1/2 (12.7)	1	50	100

#### Spec:

- Finished with a smooth, black coating
- Stainless steel band with zinc plated screw
- Designed to exceed 40 inch-pounds of torque

### DRYER CLAMPS

The unique design of Cambridge dryer ventilation clamps makes them the easiest screw style clamps to tighten. Available in a variety of diameter ranges, techs can always find the perfectly sized clamp for most home or industrial dryer installation.



ITEM#	SKU#	SAE SIZE	MINIMUM DIAMETER Inches (mm)	MAXIMUM DIAMETER Inches (mm)	UOM	ORDER MULTIPLE	MASTER QTY
108956	HC2-48EE	48	2-9/16 (65)	3-1/2 (89)	1	200	200
107292	HC2-64EE	64	3-9/16 (90)	4-1/2 (114)	1	200	200
111519	HC2-96EE	96	5-5/8 (143)	6-1/2 (165)	1	200	200

#### Spec:

- Zinc plated steel

### TENSION CLAMPS

Cambridge tension clamps have an easy-to-use pressure mechanism.



ITEM#	SKU#	SIZE Inches (mm)	UOM	ORDER MULTIPLE	MASTER QTY
107849	SC-4	4 (102)	1	500	500

#### Spec:

- Use with 4" non-rigid flexible duct
- ASTM standard D-2609

# HOSE CLAMPS

## SERIES 2000 1/2" BAND

All Stainless Steel Design

ITEM#	SKU#	SAE SIZE	MINIMUM DIAMETER Inches (mm)	MAXIMUM DIAMETER Inches (mm)	UOM	ORDER MULTIPLE	MASTER QTY
106191	HC2-6S	6	7/16 (11)	25/32 (20)	Box of 10	1	100
106214	HC2-8S	8	1/2 (13)	29/32 (23)	Box of 10	1	100
106143	HC2-10S	10	9/16 (14)	1-1/16 (27)	Box of 10	1	100
106144	HC2-12S	12	11/16 (17)	1-1/4 (32)	Box of 10	1	50
106048	HC2-16S	16	13/16 (21)	1-1/2 (38)	Box of 10	1	50
106049	HC2-20S	20	13/16 (21)	1-3/4 (44)	Box of 10	1	50
105818	HC2-24S	24	1-1/16 (27)	2 (51)	Box of 10	1	50
105792	HC2-28S	28	1-5/16 (33)	2-1/4 (57)	Box of 10	1	50
105777	HC2-32S	32	1-9/16 (40)	2-1/2 (64)	Box of 10	1	50
105793	HC2-36S	36	1-13/16 (46)	2-3/4 (70)	Box of 10	1	50
106305	HC2-40S	40	2-1/16 (52)	3 (76)	Box of 10	20	20
106574	HC2-44S	44	2-5/16 (59)	3-1/4 (83)	Box of 10	20	20
105345	HC-48S	48	2-9/16 (65)	3-1/2 (89)	Box of 10	20	20
106857	HC2-52S	52	2-13/16 (71)	3-3/4 (95)	Box of 10	20	20
106845	HC2-56S	56	3-1/16 (78)	4 (102)	Box of 10	20	20
106306	HC2-64S	64	3-9/16 (90)	4-1/2 (114)	Box of 10	20	20
106307	HC2-72S	72	4-1/18 (105)	5 (127)	Box of 10	20	20
106013	HC2-80S	80	4-5/8 (117)	5-1/2 (140)	Box of 10	20	20
106198	HC2-88S	88	5-1/8 (133)	6 (152)	Box of 10	20	20
106195	HC2-96S	96	5-5/8 (143)	6-1/2 (165)	Box of 10	20	20
106304	HC2-104S	104	6-1/8 (159)	7 (178)	Box of 10	20	20



See our clamps catalog for a full selection of clamps

- Cambridge hose clamps are multi-purpose clamps used to seal hoses or pipes onto fittings
- Easy to use and provides a tight and secure hold



**Spec:**

- Stainless Steel
- Meets or exceeds SAE J1508 Standards



Stainless steel resists corrosion, heat damage and chemical damage

## HOSE CLAMPS IN JARS

Cambridge hose clamp jars are a convenient way to display and store hose clamps. The assortments are made up of commonly used clamps.



ITEM# 106520  
SKU# CJ-HC30  
UOM: Jar of 30  
ORDER MULTIPLE: 20  
MASTER QTY: 20

3 each SAE sizes:  
4, 6, 8, 10, 12, 16, 20, 24, 28, 32

SAE sizes 4 & 6 have 5/16" band. All others have 1/2" band.  
Stainless steel band, zinc-plated housing and screw


## HOSE CLAMPS IN BAGS

ITEM#	SKU#	SAE SIZE	MINIMUM DIAMETER Inches	MAXIMUM DIAMETER Inches	BAND WIDTH Inches	UOM	ORDER MULTIPLE	MASTER QTY
**112667	HC14635	4	7/32	5/8	5/16	Bag of 6	12	120
**112743	HC14636	6	7/16	25/32	5/16	Bag of 6	12	120
**112745	HC14638	10	9/16	1-1/16	1/2	Bag of 6	12	120
**112744	HC14637	16	13/16	1-1/2	1/2	Bag of 6	12	120

\*Stainless steel band, housing, and screw  
\*\*Stainless steel band and housing with a zinc-plated screw



## PEX PINCH CLAMPS



ITEM#	SKU#	TUBE SIZE Inches (mm)	OPEN DIAMETER mm	WIDTH Inches (mm)	UOM	ORDER MULTIPLE	MASTER QTY
108376	PEX12	1/2 (12.7)	17.5	.276 (7)	100	1	20
108377	PEX34	3/4 (19)	23.3	.354 (9)	100	1	20
109859	PEX58	5/8 (15.9)	20.8	.276 (7)	100	1	20
108375	PEX01	1 (25.4)	29.6	.394 (10)	50	1	20

### Spec:

- ASTM F2098
- Safe for potable water and radiant floor heating
- Made with heavy duty 304 stainless steel

## PINCH CLAMPS



Cambridge pinch clamps have a specialized tongue-in-groove design which provide a full 360° seal. They are ideal for both flexible and inflexible thin-walled hoses.

ITEM#	SKU#	MINIMUM DIAMETER Inches (mm)	OPEN DIAMETER Inches (mm)	WIDTH Inches (mm)	THICKNESS	UOM	ORDER MULTIPLE	MASTER QTY
106169	PEC716	.38 (9.6)	7/16 (11.3)	5 mm	0.5mm	100	1	100
106166	PEC12	.43 (10.8)	1/2 (13.3)	7 mm	0.6 mm	100	1	50
106171	PEC916	.47 (12)	9/16 (14.5)	7 mm	0.6 mm	100	1	50
106168	PEC58	.52 (13.2)	5/8 (15.7)	7 mm	0.6 mm	100	1	50
106167	PEC2332	.60 (15.3)	23/32 (18.5)	7 mm	0.6 mm	100	1	50
106170	PEC78	.76 (19.4)	7/8 (22.6)	7 mm	0.6 mm	100	1	25
106162	PEC100	.88 (22.4)	1 (25.4)	7 mm	0.6 mm	100	1	25
106165	PEC118	1 (25.4)	1-1/8 (28.6)	7 mm	0.6 mm	100	1	25
106164	PEC114	1.12 (28.4)	1-1/4 (31.6)	7 mm	0.6 mm	100	1	25

### Spec:

- Made with 100% 304 stainless steel

- Smooth-edge band prevents damage to hose
- Tamper evident design
- Custom open diameters available

## PINCH CLAMP CRIMPER

ITEM# 106244 SKU# CSC-102  
ORDER MULTIPLE: 30 MASTER QTY: 30



- Installs every standard pinch clamp, regardless of size
- Unique "Tab" design provides crimping access in hard-to-reach spaces
- No gauging or tool calibration necessary
- Fully compliant with ASTM F-2098 specifications
- Constructed of high quality carbon steel
- Ratcheting action to ensure a sufficient grip

## CHIP BRUSHES

Cambridge chip brushes are excellent all-purpose brushes that are ideal for applying adhesives, touch-up work, and cleaning. Their affordability is great for any budget and their versatility covers the needs of both the professional and DIYer.

ITEM#	SKU#	SIZE	STYLE	UOM	ORDER MULTIPLE	MASTER QTY
110109	CB-112	1-1/2"	Standard	1	288	288
110110	CB-2	2"	Standard	1	288	288
110111	CB-212	2-1/2"	Standard	1	288	288
110112	CB-3	3"	Standard	1	288	288
111814	ACB2	2"	Angled	1	144	144



- All-natural bristle
- Durable hardwood handle
- Sturdy construction



# PADS AND MOUNTING SYSTEMS

A/C Brackets .....	12
Air Handler Block.....	12
Anti Vibration Pads .....	11
Cork/Rubber .....	11
E.V.A./Rubber .....	11
Rubber .....	11
Condenser Pads.....	11
Graphite™ .....	11
Onyx™ .....	11
Furnace Mounting Block.....	12
Heat Pump Risers .....	12
Isolation Pads .....	11
Mounting Straps .....	13
Straps .....	13
Two-Hole Pipe Straps .....	13
Top Beam Clamp.....	12

## ANTI VIBRATION PADS

Cambridge anti-vibration pads are ideal for air conditioners, compressors, cooling towers, presses, machines, or anywhere vibration control is needed. They are designed to withstand 50lb psi and are made with elastomeric oil resistant padding.

### CORK / RUBBER



ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
200482	2" x 2" x 7/8"	1	48	48
200527	3" x 3" x 7/8"	1	36	36
200452	4" x 4" x 7/8"	1	24	24
200545	6" x 6" x 7/8"	1	24	24
200571	18" x 18" x 7/8"	1	6	6

### E.V.A. / RUBBER



ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
200532	2" x 2" x 7/8"	1	48	48
200529	3" x 3" x 7/8"	1	36	36
200454	4" x 4" x 7/8"	1	24	24
200575	6" x 6" x 7/8"	1	24	24
200573	18" x 18" x 7/8"	1	6	6


### RUBBER



ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
200481	2" x 2" x 3/8"	1	48	48
200528	3" x 3" x 3/8"	1	36	36
200453	4" x 4" x 3/8"	1	24	24
200572	18" x 18" x 3/8"	1	6	6

## ISOLATION PADS

ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
200561	18" x 18" x 3/4"	1	6	6

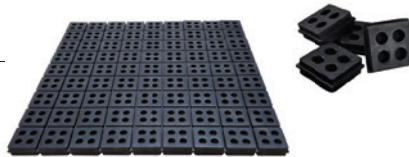

Cambridge natural rubber isolation pads are designed to reduce vibration and noise from refrigeration and air conditioning equipment. Each pad has a circular design that offers a suction cup effect eliminating the need to fasten the pad down. These pads come in 18" squares but can be made into smaller segments by cutting or tearing the eighty-one 2x2 segments into the size that is required. They withstand a load of 180 psi with great resilience.

## CONDENSER PADS

Cambridge's line of stackable, durable condenser pads, in both Onyx™ (black) and Graphite™ (gray) have chemical resistance, which protects them from cracking and weathering. Available in a range of sizes, each pad disperses the weight of the A/C unit to keep it from shifting or sinking. The Onyx pads are rated UV.



### GRAPHITE™

ITEM#	SIZE	UOM	ORDER MULTIPLE	PALLET QTY
200580	30" x 30" x 3"	1	16	16
200581	32" x 32" x 3"	1	16	16
200582	36" x 36" x 3"	1	16	16



### ONYX™

ITEM#	SIZE	UOM	ORDER MULTIPLE	PALLET QTY
200577	30" x 30" x 3"	1	16	16
200578	32" x 32" x 3"	1	16	16
200579	36" x 36" x 3"	1	16	16




## HEAT PUMP RISERS

Cambridge heat pump risers provides the desired elevation for condensers, heat pumps, and air handlers. Butyl mastic on the top and bottom guarantees no slipping and reduced vibration and noise. They can withstand a uniformly distributed load of up to 2000 pounds.

### Spec:

- Gray
- Made from heavy-duty injection molded polypropylene with butyl mastic on the top and bottom
- 3" and 6" options
- 1 piece and 2 piece options

ITEM#	SIZE	STYLE	UOM	ORDER MULTIPLE	MASTER QTY
200442	3"	1 Piece	1	48	48
200552	6"	1 Piece	1	36	36
200553	3"	2 Piece	1	32	32
200554	6"	2 Piece	1	16	16

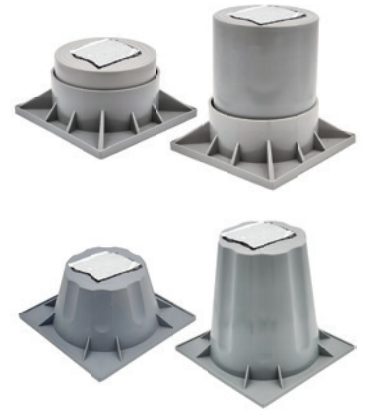

## FURNACE MOUNTING BLOCK

Cambridge furnace mounting blocks lift furnaces off the floor and can support up to 500 pounds. No tools are necessary. Each block attaches easily with a peel and stick installation.

ITEM# 200564  
UOM: 1  
ORDER MULTIPLE: 72  
MASTER QTY: 72



Triangular base provides better support than the competition

## AIR HANDLER BLOCK

The Cambridge air handler blocks support A/C air handler units in attics. They're made of dense, lightweight EPS foam that maintains its strength even in damp conditions, keeping the air handler unit off the ground.


ITEM#	SIZE	MATERIAL	DENSITY	UOM	ORDER MULTIPLE	MASTER QTY
200533	8" x 8" x 4"	EPS Foam	1.5 PCF	1	162	162



## A/C BRACKETS

Cambridge A/C wall brackets are heavy duty steel brackets used to hang A/C condensers and heat pumps to the side of a home or building.

ITEM#	DESCRIPTION	UOM	ORDER MULTIPLE	MASTER QTY
201003	30" AC Mounting Bracket	Box of 2	1	1
201004	36" AC Mounting Bracket	Box of 2	1	1

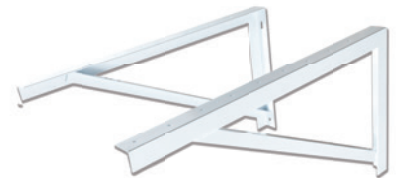

## TOP BEAM CLAMP

### Spec:

- Includes locknut

ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
200389	3/8"	1	100	100



Cambridge's Steel Top Beam Clamp is designed for use with a 3/8" threaded rod and suspend pipe from an overhead beam. It is also compatible with multiple pipe materials.

# MOUNTING STRAPS

## STRAPS

Spec:		ITEM#	SKU#	SIZE	STYLE	UOM	ORDER MULTIPLE	MASTER QTY
• EMT • Steel		113060	CL14641	1/2"	1 Hole	Bag of 20	120	120
		200190	200190	1/2"	1 Hole	1	100	1000
		113059	CL14640	3/4"	1 Hole	Bag of 12	120	120
		200189	200189	3/4"	1 Hole	1	100	500
		200191	200191	1"	1 Hole	1	50	500
		200192	200192	1-1/4"	1 Hole	1	20	100
		200193	200193	1-1/2"	1 Hole	1	50	50
		200198	200198	1/2"	2 Hole	1	50	500
		200199	200199	3/4"	2 Hole	1	50	500
		200200	200200	1-1/4"	2 Hole	1	50	50
		200201	200201	1-1/2"	2 Hole	1	25	25
		200202	200202	2"	2 Hole	1	25	25



Spec:		ITEM#	SIZE	STYLE	UOM	ORDER MULTIPLE	MASTER QTY
• Rigid • Steel		200196	3/4"	1 Hole	1	50	500
		200197	1"	1 Hole	1	50	50



## TWO-HOLE PIPE STRAPS

Spec:	
• Copper-plated steel	
• Used to secure rigid copper pipe	
• Offers strong support	

ITEM#	SKU#	NOM. SIZE	UOM	ORDER MULTIPLE	MASTER QTY
108582	PH-PS50C	1/2"	1	100	900
108583	PH-PS75C	3/4"	1	100	900
108581	PH-PS100K	1"	1	50	450



Spec:	
• Galvanized steel	
• Used to secure Schedule 40 steel and PVC pipe	
• Offers strong support	

SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
200495	1/2"	Bag of 10	20	120
200496	3/4"	Bag of 10	20	120
200499	1"	Bag of 5	20	160
200500	1-1/4"	Bag of 5	20	80
200497	1-1/2"	Bag of 5	20	80
200498	2"	Bag of 5	20	60
200501	3"	Bag of 5	10	40
200502	4"	Bag of 5	10	40





# ELECTRICAL

Cable Clamps.....	20	Liquid-Tight Conduit & Fittings.....	15
Cable Staples.....	20	Liquid-Tight Fittings.....	15
Cable Tie Mounts .....	20	Liquid-Tight Flexible NM Conduit.....	15
Cable Ties .....	18-19	Locknut.....	15
Assorted Cable Ties in Tubes .....	19	Merchandising Display .....	31-32
Mini.....	18	Straps .....	21
Screw Mount .....	19	Tape .....	22
Standard .....	19	Electrical Tape .....	22
Electrical Disconnects .....	16	Liquid Tape .....	22
A/C Disconnect .....	16	Terminals .....	24-30
Side Open Disconnect.....	16	Terminal Kits.....	30
Electrical Supplies .....	16-18	Terminals .....	24-29
Clamp Service Connectors .....	16-17	Terminal Tools.....	30
Electrical Covers.....	17	Test Leads.....	29
Emergency Switch Covers .....	17	Whip Kits .....	15
Flex Connectors.....	17	Wire .....	21
Junction Boxes .....	16	Hook-Up Wire.....	21
Nipple Connectors .....	17	Primary .....	21
Power Supply Cords .....	18	SJTO - Service Cords.....	21
Receptacles .....	18	Wire Connectors .....	22-24
Switches.....	18	Standard .....	22-23
Electrical Tools.....	30	Winged.....	23-24
Circuit Electrical Tester.....	30	Wire Protection .....	21
Mini Butane Torch.....	30	Boca Plates.....	21
Soldering Iron .....	30	Stud Guards.....	21
Heat Shrink Tubing .....	29		

## WHIP KITS



### Spec:

- UL 1007



ITEM#	LENGTH	WIRE SIZE	CONNECTOR SIZE	CONNECTOR MATERIAL	UOM	ORDER MULTIPLE	MASTER QTY
200048	4'	3 x #10	1/2"	Metallic	1	6	6
200049	4'	3 x #10	1/2"	Non-Metallic	1	6	6
200050	6'	3 x #10	1/2"	Metallic	1	6	6
200051	6'	3 x #10	1/2"	Non-Metallic	1	6	6
200052	4'	2 x #8, 1 x #10	3/4"	Metallic	1	6	6
200053	4'	2 x #8, 1 x #10	3/4"	Non-Metallic	1	6	6
200054	6'	2 x #8, 1 x #10	3/4"	Metallic	1	6	6
200055	6'	2 x #8, 1 x #10	3/4"	Non-Metallic	1	6	6
200546	8'	2 x #8, 1 x #10	3/4"	Metallic	1	6	6

Cambridge Electrical Whip Kits save time and labor, lowering costs of every A/C unit hookup job. Use them for refrigeration, heat pumps, hot tubs, swimming pools, and outdoor lighting.

## LIQUID-TIGHT CONDUIT & FITTINGS

### LIQUID-TIGHT FLEXIBLE NON-METALLIC CONDUIT



### Spec:

- UL 1660



ITEM#	SKU#	SIZE	LENGTH	MATERIAL	UOM	ORDER MULTIPLE	MASTER QTY
112702	W14653	1"	100'	PVC	1 Roll	1	1
112703	W14654	3/4"	100'	PVC	1 Roll	1	1
112704	W14655	1/2"	100'	PVC	1 Roll	1	1

Cambridge offers weather-proof, flexible, flame resistant (PVC) conduit for weatherproof wiring or outdoor and rooftop equipment. Easy to cut and join with metallic and non-metallic connectors.

### LIQUID-TIGHT FITTINGS



### Spec:


- PVC
- Straight
- Type B
- UL 514B



### Spec:

- PVC
- 90° Angle
- Type B
- UL 514B



 Cambridge PVC-constructed liquid-tight connectors are produced from UV-rated material for long outdoor life

ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112707	W14658	1/2"	1	25	100
112705	W14656	3/4"	1	10	100

ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112708	W14659	1/2"	1	10	100
112706	W14657	3/4"	1	10	100

### LOCKNUT

### Spec:

- Zinc-plated steel

ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112713	W14664	1/2"	1	10	1000





# ELECTRICAL DISCONNECTS



Cambridge electrical disconnect boxes simplify wiring by lining up the terminals and feature a pull-out handle that can be replaced without having to replace the entire disconnect. They are made of rust and corrosion-resistant steel for outdoor use.



## A/C DISCONNECT

### Spec:

- Weatherproof
- 240 VAC
- Bottom to-top opening
- UL 1429

ITEM#	STYLE	AMP	UOM	ORDER MULTIPLE	MASTER QTY
200556	Fused	30	1	6	6
200557	Fused	60	1	6	6
200555	Non-Fused	60	1	6	6



## SIDE OPEN

### Spec:

- Weatherproof
- 240 VAC
- Side opening
- UL 1429

ITEM#	STYLE	AMP	UOM	ORDER MULTIPLE	MASTER QTY
201000	Non-Fused	60	1	6	6

The door on the Cambridge side open A/C disconnect swings a full 180° for easy access

# ELECTRICAL SUPPLIES

## JUNCTION BOXES

All Cambridge utility, switch and receptacle junction boxes come with knockouts for maximum flexibility and simplicity. Our boxes are made of durable steel construction.

ITEM#	SKU#	DESCRIPTION	SIZE	STYLE	UOM	ORDER MULTIPLE	MASTER QTY
112755	SW14622	Utility Box	Single Gang	1/2" Knockouts	1	10	50
112889	SW14621	Switch Box	Single Gang	1/2" Knockouts	1	10	50
112756	SW14625	Receptacle Box	4"	1/2" Knockouts	1	10	40
112757	SW14626	Receptacle Box	4" Octagonal	1/2" & 3/4" Knockouts	1	10	50
112890	SW14624	Receptacle Box	4"	1/2" Knockouts	1	10	40
113061	SW14627	Weatherproof Receptacle Box	4-1/2"	1/2" Knockouts	1	20	20



## CLAMP SERVICE CONNECTORS

### Spec:

- Use with NM
- Zinc-die cast material



### Spec:

- Use with 14/2, 14/3, 12/2
- Zinc-die cast material



ITEM#	SKU#	SIZE	KNOCKOUT	UOM	ORDER MULTIPLE	MASTER QTY
112785	T14590	3/8"	1/2"	Bag of 8	12	120
112783	T14588	3/8"	1/2"	Bag of 25	12	48
112784	T14589	3/4"	3/4"	Bag of 4	12	120

ITEM#	SIZE	KNOCKOUT	UOM	ORDER MULTIPLE	MASTER QTY
200204	3/8"	1/2"	1	50	500



# CLAMP SERVICE CONNECTORS CONTINUED

## Spec:

- Clamp
- Use with NM/SE, NM/Combination
- Zinc-die cast material



SKU#	ITEM#	SIZE	KNOCKOUT	UOM	ORDER MULTIPLE	MASTER QTY
200185	200185	3/4"	3/4"	Bag of 50	1	10
200186	200186	1"	1"	Bag of 25	1	10
112786	T14672	Trade Size: 3/8"	1/2"	Bag of 7	12	72

# FLEX CONNECTORS

## Spec:

- 90° Angle
- Use with 14/2, 14/3, 12/2
- Zinc-die cast material



# NIPPLE CONNECTORS

## Spec:

- Use with IMC and Rigid
- Steel



ITEM#	SKU#	SIZE	KNOCKOUT	UOM	ORDER MULTIPLE	MASTER QTY
200203	200203	3/8"	1/2"	Bag of 50	1	10
113063	T14591	3/8"	1/2"	Bag of 3	12	120


ITEM#	SKU#	SIZE	STYLE	UOM	ORDER MULTIPLE	MASTER QTY
113068	W14646	1/2"	Offset	Bag of 2	6	60

# ELECTRICAL COVERS

Cambridge offers standard steel utility covers for switches, receptacles, boxes, and switch/receptacle combinations.

## Spec:

- Steel




ITEM#	SKU#	DESCRIPTION	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112750	SW14613	Single Toggle Switch Cover	4" x 4"	1	12	120
112672	SW14668	Single Toggle Switch Cover	Single Gang	1	10	100
112751	SW14614	Single Receptacle Cover	4" x 4"	1	12	120
112888	SW14617	Duplex Receptacle Cover	Single Gang	1	12	120
112912	SW14618	Duplex Receptacle Cover	4" x 4"	1	12	120
112753	SW14616	Single Receptacle and Toggle Switch Cover	4" x 4"	1	12	120
112754	SW14619	Duplex Receptacle and Toggle Switch Cover	4" x 4"	1	12	120
112758	SW14628	Weatherproof Utility Box Cover	Single Gang	1	12	120
112671	SW14667	Blank Utility Box Cover	Single Gang	1	10	100
112887	SW14612	Flat Blank Box Cover	4" x 4"	1	12	120

# EMERGENCY SWITCH COVERS

Cambridge switch covers come in the industry-standard red, and already have gas, oil, or emergency printed on them.

## Spec:

- On/Off Covers
- Red with white letters

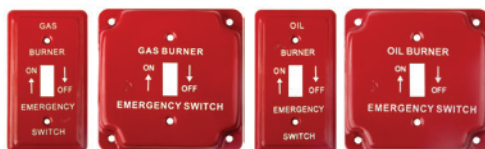

ITEM#	SKU#	DESCRIPTION	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112759	SW14673	Gas Burner Emergency Cover	2-3/8" x 4-1/4"	1	12	120
112913	SW14721	Gas Burner Emergency Cover	2-3/4" x 4-1/2"	1	12	120
112762	SW14676	Gas Burner Emergency Cover	4" x 4"	1	12	120
112761	SW14675	Oil Burner Emergency Cover	2-3/8" x 4-1/4"	1	12	120
112914	SW14722	Oil Burner Emergency Cover	2-3/4" x 4-1/2"	1	12	120
112760	SW14674	Oil Burner Emergency Cover	4" x 4"	1	12	120

## SWITCHES

### Spec:

- 15 AMP / 250 VAC
- 20 AMP / 125 VAC
- On/Off SPST



ITEM#	SKU#	DESCRIPTION	UOM	ORDER MULTIPLE	MASTER QTY
112746	SW14596	Metal Toggle Switch (ON-OFF) SPST	1	12	120

### Spec:

- 15 AMP / 120 VAC
- 10 AMP / 240 VAC
- On/Off/On SPDT



ITEM#	SKU#	DESCRIPTION	UOM	ORDER MULTIPLE	MASTER QTY
110919	SW12929	Metal Bat Toggle Switch With Screw (ON-OFF-ON)	1	12	120

## RECEPTACLES

### Spec:

- 2 pole, 3 wire receptacle
- Grounded




ITEM#	SKU#	STYLE	AMP	VAC	UOM	ORDER MULTIPLE	MASTER QTY
112749	SW14601	Single	20	250	1	12	120

## POWER SUPPLY CORDS

### Spec:

- 16/3
- 110 Volts
- 6' Long



ITEM#	SKU#	PLUG STYLE	UOM	ORDER MULTIPLE	MASTER QTY
112701	W14643	90°	1	12	120
112787	W14642	Straight	1	12	120

## CABLE TIES

Cambridge cable ties are available in lengths from 4" to 60" with tensile strengths from 18 pounds to 250 pounds. Cambridge will meet ANY of your cable tie requirements.


-----Lengths from 4" through 60"-----




\*All cable tie measurements are approximations



Tensile strengths from 18lb to 250lb

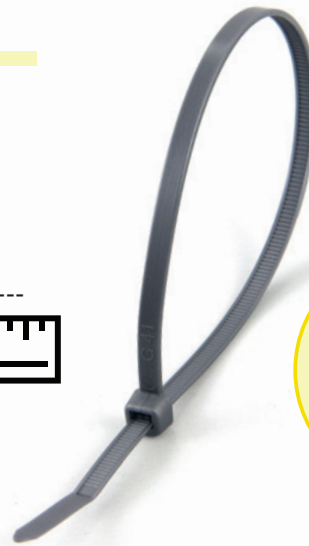

All Cambridge cable ties feature our *bent tip design* for smooth insertion in hard-to-reach places



## MINI CABLE TIES

### Spec:

- 6/6 Nylon
- 18lb tensile strength
- 0.10" (2.5mm) Width
- UL 62275



ITEM#	SKU#	LENGTH Inches (mm)	WIDTH Inches (mm)	TENSILE STRENGTH lbs	BUNDLE DIAMETER Inches (mm)	COLOR	UOM	ORDER MULTIPLE	MASTER QTY
110876	CT10283	4 (100)	0.10 (2.5)	18	0.9 (22)	Natural	Bag of 100	12	120
110869	CT10274	4 (100)	0.10 (2.5)	18	0.9 (22)	UV Black	Bag of 100	12	120
103709	CT5-18M9	5.5 (139)	0.10 (2.5)	18	1.3 (33)	Natural	Bag of 1000	25	25

# STANDARD CABLE TIES

## Spec:

- 6/6 Nylon
- 40-75lb tensile strength
- UL 62275



ITEM#	SKU#	LENGTH Inches (mm)	WIDTH Inches (mm)	TENSILE STRENGTH lbs	BUNDLE DIAMETER Inches (mm)	COLOR	UOM	ORDER MULTIPLE	MASTER QTY
111892	CT10316	6 (150)	0.14 (3.6)	40	1.3 (33)	Natural	Bag of 100	12	120
111893	CT10318	6 (150)	0.14 (3.6)	40	1.3 (33)	UV Black	Bag of 100	12	120
104304	CT8-18COW	8 (200)	0.10 (2.5)	18	2.1 (53)	UV Black	Bag of 100	200	200
110877	CT10284	8 (200)	0.14 (3.6)	40	2.1 (53)	Natural	Bag of 100	12	120
110882	CT10290	8 (200)	0.14 (3.6)	40	2.1 (53)	Natural	Bag of 20	120	120
110870	CT10275	8 (200)	0.14 (3.6)	40	2.1 (53)	UV Black	Bag of 100	12	120
110883	CT10291	8 (200)	0.14 (3.6)	40	2.1 (53)	UV Black	Bag of 20	120	120
110878	CT10285	11 (280)	0.14 (3.6)	40	3.0 (76)	Natural	Bag of 100	12	120
110879	CT10286	11 (280)	0.14 (3.6)	40	3.0 (76)	UV Black	Bag of 100	12	120
110884	CT10293	15 (380)	0.19 (4.8)	50	4.1 (105)	Natural	Bag of 10	120	120
110861	CT14082	8 (200)	0.19 (4.8)	75	2.0 (50)	Natural	Bag of 1000	10	10
109966	CT12780	8 (200)	0.19 (4.8)	75	2.0 (50)	Natural	Bag of 100	12	120
110862	CT14083	8 (200)	0.19 (4.8)	75	2.0 (50)	UV Black	Bag of 1000	10	10
109967	CT12781	8 (200)	0.19 (4.8)	75	2.0 (50)	UV Black	Bag of 100	12	120
110863	CT14084	11 (280)	0.19 (4.8)	75	2.8 (70)	Natural	Bag of 1000	5	5
109971	CT12785	11 (280)	0.19 (4.8)	75	2.8 (70)	Natural	Bag of 100	12	120
112506	CT14560	11 (280)	0.19 (4.8)	75	2.8 (70)	Natural	Bag of 50	120	120
110864	CT14085	11 (280)	0.19 (4.8)	75	2.8 (70)	UV Black	Bag of 1000	5	5
109969	CT12783	11 (280)	0.19 (4.8)	75	2.8 (70)	UV Black	Bag of 100	12	120
110865	CT14086	14 (370)	0.19 (4.8)	75	4.0 (102)	Natural	Bag of 1000	5	5
110860	CT10287	14 (370)	0.19 (4.8)	75	4.0 (102)	Natural	Bag of 100	12	60
110866	CT14087	14 (370)	0.19 (4.8)	75	4.0 (102)	UV Black	Bag of 1000	5	5
110859	CT10276	14 (370)	0.19 (4.8)	75	4.0 (102)	UV Black	Bag of 100	12	60

# TUBES - ASSORTED CABLE TIES

Cambridge Cable Tie Tubes offer an assortment of commonly-used ties. The tube offers a great way to easily store the ties and keep them available for the next project.



## Spec:

- 6/6 Nylon
- UL 62275



ITEM# 110653 SKU# CT13623  
UOM: Tube of 650  
ORDER MULTIPLE: 20 MASTER QTY: 20

- 300 4" UV Black 18lb 0.8" (21mm)
- 300 8" UV Black 50lb 2.0" (50mm)
- 50 11" UV Black 50lb 3.0" (75mm)



ITEM# 110652 SKU# CT13622  
UOM: Tube of 650  
ORDER MULTIPLE: 20 MASTER QTY: 20

- 300 4" Natural 18lb 0.8" (21mm)
- 300 8" Natural 50lb 2.0" (50mm)
- 50 11" Natural 50lb 3.0" (75mm)

# SCREW-MOUNT CABLE TIES

Cambridge screw-mount cable tie heads feature a screw hole used for mounting the cable tie to a variety of surfaces.

## Spec:

- 6/6 Nylon
- Screw size #12
- 50lb tensile strength
- UL 62275




ITEM#	SKU#	LENGTH Inches (mm)	WIDTH Inches (mm)	TENSILE STRENGTH lbs	BUNDLE DIAMETER Inches (mm)	COLOR	UOM	ORDER MULTIPLE	MASTER QTY
103848	CTM6-40C9	6 (150)	0.14 (3.6)	40	1.3 (33)	Natural	Bag of 100	12	120
110867	CT14088	8 (200)	0.19 (4.8)	50	2.0 (50)	Natural	Bag of 100	12	120
110868	CT14089	8 (200)	0.19 (4.8)	50	2.0 (50)	UV Black	Bag of 100	12	120

## CABLE CLAMPS



ITEM#	SKU#	A Inches (mm)	B Inches (mm)	C Inches (mm)	SCREW DIAMETER Inches (mm)	COLOR	UOM	ORDER MULTIPLE	MASTER QTY
104614	CC3-1/8B	0.130 (3.3)	0.142 (3.6)	0.358 (9.1)	0.21 (5.3)	UV Black	Bag of 100	1	100
103752	CC3-3/16	0.189 (4.8)	0.209 (5.3)	0.358 (9.1)	0.21 (5.3)	Natural	Bag of 100	1	100
105500	CC3-3/16B	0.189 (4.8)	0.209 (5.3)	0.358 (9.1)	0.21 (5.3)	UV Black	Bag of 100	1	100
103751	CC3-1/4	0.260 (6.6)	0.291 (7.4)	0.358 (9.1)	0.21 (5.3)	Natural	Bag of 100	1	100
104966	CC3-1/4B	0.260 (6.6)	0.291 (7.4)	0.358 (9.1)	0.21 (5.3)	UV Black	Bag of 100	1	100
105502	CC3-5/16B	0.307 (7.8)	0.350 (8.9)	0.358 (9.1)	0.21 (5.3)	UV Black	Bag of 100	1	100
103753	CC3-3/8	0.382 (9.7)	0.429 (10.9)	0.362 (9.2)	0.21 (5.3)	Natural	Bag of 100	1	100
105501	CC3-3/8B	0.382 (9.7)	0.429 (10.9)	0.362 (9.2)	0.21 (5.3)	UV Black	Bag of 100	1	100
103818	CC5-1/8	0.114 (2.9)	0.122 (3.1)	0.500 (12.7)	0.21 (5.3)	Natural	Bag of 100	1	100
105852	CC5-1/8B	0.114 (2.9)	0.122 (3.1)	0.500 (12.7)	0.21 (5.3)	UV Black	Bag of 100	1	100
112740	CL14585	0.82 (20.9)	0.248 (6.3)	0.500 (12.7)	0.21 (5.3)	Natural	Bag of 48	12	120
103776	CC5-1/4	0.232 (5.9)	0.248 (6.3)	0.500 (12.7)	0.21 (5.3)	Natural	Bag of 100	1	100
106177	CC5-1/4B	0.232 (5.9)	0.248 (6.3)	0.500 (12.7)	0.21 (5.3)	UV Black	Bag of 100	1	100
112741	CL14586	1.05 (26.7)	0.374 (9.5)	0.500 (12.7)	0.21 (5.3)	Natural	Bag of 41	12	120
103820	CC5-3/8	0.358 (9.1)	0.374 (9.5)	0.500 (12.7)	0.21 (5.3)	Natural	Bag of 100	1	100
105755	CC5-3/8B	0.358 (9.1)	0.374 (9.5)	0.500 (12.7)	0.21 (5.3)	UV Black	Bag of 100	1	100
112742	CL14587	1.19 (30.2)	0.500 (12.7)	0.500 (12.7)	0.21 (5.3)	Natural	Bag of 25	12	120
103755	CC5-1/2	0.480 (12.2)	0.500 (12.7)	0.500 (12.7)	0.21 (5.3)	Natural	Bag of 100	1	100
105686	CC5-1/2B	0.480 (12.2)	0.500 (12.7)	0.500 (12.7)	0.21 (5.3)	UV Black	Bag of 100	1	100
105776	CC5-5/8B	0.607 (15.4)	0.622 (15.8)	0.500 (12.7)	0.21 (5.3)	UV Black	Bag of 100	1	50
105893	CC5-3/4B	0.732 (18.6)	0.748 (19.0)	0.500 (12.7)	0.21 (5.3)	UV Black	Bag of 100	1	50
105894	CC5-7/8B	0.858 (21.8)	0.874 (22.2)	0.500 (12.7)	0.21 (5.3)	UV Black	Bag of 100	1	50
111596	CC5-1-1/8B	1.10 (27.9)	1.122 (28.5)	0.500 (12.7)	0.21 (5.3)	UV Black	Bag of 100	1	50



Cambridge cable clamps are made of nylon and feature a screw hole designed for mounting bundles of wires, cables, and ropes to a wall or panel. The cable clamps are easy-to-use and provide a strong hold around wires, cables, ropes, and more.

## CABLE TIE MOUNTS



Cambridge cable tie mounts are made of nylon and securely fasten cable ties to any surface. A screw hole and self-adhesive backing enable users to easily attach the mount to any flat surface. This allows for easy organization of all cables, wires, ropes, and more.

· Use with 18 lb  
· No screw hole

· Use with 18 & 40 lb  
· Screw size: #5

· Use with 18, 40, & 50 lb  
· Screw size: #10

ITEM#	SKU#	SIZE Inches (mm)	COLOR	UOM	ORDER MULTIPLE	MASTER QTY
103759	ACMB50C	0.50 (12.7)	Natural	Bag of 100	1	50
105281	ACMB50C-0	0.50 (12.7)	UV Black	Bag of 100	1	50
103760	ACMB75C	0.75 (19)	Natural	Bag of 100	1	50
104796	ACMB75C-0	0.75 (19)	UV Black	Bag of 100	1	50
200463		1.1 (28)	Natural	Bag of 25	4	200
103729	ACMB11C	1.1 (28)	Natural	Bag of 100	1	50
110592	ACMB11K-0-B	1.1 (28)	UV Black	Bag of 50	1	50
104265	ACMB11C-0	1.1 (28)	UV Black	Bag of 100	1	50

## CABLE STAPLES



Cambridge Staples are designed to organize cable wires and hold them securely in place. Plastic and zinc-plated nails resist rust and corrosion caused by extreme weather.

### Spec:

#### AWG

- 1/2": 14/2, 12/2, 10/2
- 3/4": 14/3, 12/3, 10/3

ITEM#	SKU#	SIZE	MATERIAL	COLOR	UOM	ORDER MULTIPLE	MASTER QTY
110271	ST12994	1/2"	Metal	Silver	Blister of 50	6	6
110270	ST12902	1/2"	Plastic	White	Bag of 50	10	10
112669	ST14629	1/2"	Plastic	White	Bag of 50	12	120
112670	ST14630	3/4"	Plastic	White	Bag of 50	12	120



# STRAPS

**Spec:**

- EMT
- Steel

ITEM#	SKU#	SIZE	STYLE	UOM	ORDER MULTIPLE	MASTER QTY
113060	CL14641	1/2"	1 Hole	Bag of 20	120	120
200190	200190	1/2"	1 Hole	1	100	1000
113059	CL14640	3/4"	1 Hole	Bag of 12	120	120
200189	200189	3/4"	1 Hole	1	100	500
200191	200191	1"	1 Hole	1	50	500
200192	200192	1-1/4"	1 Hole	1	20	100
200193	200193	1-1/2"	1 Hole	1	50	50
200198	200198	1/2"	2 Hole	1	50	500
200199	200199	3/4"	2 Hole	1	50	500
200200	200200	1-1/4"	2 Hole	1	50	50
200201	200201	1-1/2"	2 Hole	1	25	25
200202	200202	2"	2 Hole	1	25	25



**Spec:**

- Rigid
- Steel

ITEM#	SIZE	STYLE	UOM	ORDER MULTIPLE	MASTER QTY
200196	3/4"	1 Hole	1	50	500
200197	1"	1 Hole	1	50	50



# WIRE PROTECTION

## STUD GUARDS

**Spec:**

- Made from 100% steel



ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
108771	PH-SG1505C	1-1/2" x 5"	1	200	200
108585	PH-SG1509C	1-1/2" x 9"	1	200	200

## BOCA PLATES

**Spec:**

- Meets BOCA code 309.2 requirements
- Reinforces stud joists



ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
108560	PH-BPX	5" x 8"	1	50	50

# WIRE

## HOOK-UP WIRE

**Spec:** • 600V • Stranded • THHN • UL 83

Cambridge Hook-Up Wire features fine strands of wire which allows it to handle higher voltages. It is resistant to grease, oil, acids, water, solvents, and fungus and is most commonly used as internal wiring in appliances and HVAC equipment.

ITEM#	AWG	LENGTH Feet	STRANDED	COLOR	UOM	ORDER MULTIPLE	MASTER QTY
200078	8	25	19	Black	1	12	12
200065	10	48	19	Black	1	12	12
200067	12	48	19	Black	1	12	12
200066	14	48	19	Black	1	12	12
200070	16	48	26	Black	1	12	12
200074	10	48	19	Red	1	12	12
200068	14	48	19	Red	1	12	12
200072	16	48	26	Red	1	12	12
200069	14	48	19	Green	1	12	12
200076	10	48	19	White	1	12	12
200075	12	48	19	White	1	12	12
200071	14	48	19	White	1	12	12
200077	16	48	26	White	1	12	12



## PRIMARY WIRE

**Spec:** • 12V • Stranded

Cambridge Primary Wire comes in a wide range of sizes, gauges, and colors. They are made from high-quality materials that ensure durability and strength and are available in convenient easy-to-use spools.



ITEM#	SKU#	AWG	LENGTH Feet	COLOR	UOM	ORDER MULTIPLE	MASTER QTY
110990	W13790	18	40	Black	Blister of 1	24	24
110993	W13795	18	40	Red	Blister of 1	24	24
110996	W13798	16	100	Black	Spool of 1	12	12
110999	W13801	16	100	Red	Spool of 1	12	12
110989	W13789	14	20	Black	Blister of 1	24	24
110992	W13794	14	20	Red	Blister of 1	24	24
110995	W13797	14	100	Black	Spool of 1	12	12
110998	W13800	14	100	Red	Spool of 1	12	12
110994	W13796	12	100	Black	Spool of 1	12	12
110997	W13799	12	100	Red	Spool of 1	12	12
110988	W13787	10	8	Black	Blister of 1	24	24
110991	W13792	10	8	Red	Blister of 1	24	24



# SJTO - SERVICE CORDS

Cambridge service cords are used for electrical power connections. Typical applications include wiring for industrial machinery, appliances, temporary electrical power and lighting for construction sites.

ITEM#	NUMBER OF CONDUCTORS	AWG	VOLTAGE	LENGTH Feet	COLOR	UOM	ORDER MULTIPLE	MASTER QTY
200079	3	14	300V	20	Gray	1	6	6





# TAPE

## LIQUID TAPE


ITEM#	SKU#	SIZE	COLOR	UOM	ORDER MULTIPLE	MASTER QTY
110911	ET13710	4oz	Black	Blister of 1	12	12



Cambridge Liquid Tape adheres to all metal, plastic, vinyl, rubber, and composite surfaces. It seals loose terminal connections caused by vibration and normal wear, and forms a protective, dielectric coating over connections in order to seal out moisture and prevent corrosion. It is great for exposed wiring, lighting fixtures, bilge pumps, timers, and any connection requiring a waterproof seal.

## ELECTRICAL TAPE

Cambridge electrical tape delivers superior adhesion and durability as it insulates and protects wires and cables. Its exceptional quality makes it the perfect electrical tape for all applications.



**Spec:**

• UL 510

ITEM#	SKU#	LENGTH		COLOR	UOM	ORDER MULTIPLE	MASTER QTY
		Feet	Inches				
110910	ET13709	30	3/4	Black	1	144	144
109072	CET-0160BLK	60	3/4	Black	1	200	200
108383	CET-01BLK	66	3/4	Black	1	144	144
108387	CET-01RED	66	3/4	Red	1	144	144
108386	CET-01ORG	66	3/4	Orange	1	144	144
108389	CET-01YLW	66	3/4	Yellow	1	144	144
108385	CET-01GRN	66	3/4	Green	1	144	144
108384	CET-01BLU	66	3/4	Blue	1	144	144
109001	CET-01PUR	66	3/4	Purple	1	144	144
108962	CET-01BRN	66	3/4	Brown	1	144	144
108963	CET-01GRY	66	3/4	Gray	1	144	144
108388	CET-01WHT	66	3/4	White	1	144	144
110909	ET12885	20 (EA)	1/2	Red, Yellow, Blue, Green, White	Clamshell of 5	12	12



Cambridge electrical tape comes in a variety of colors, lengths, and sizes

## WIRE CONNECTORS



Cambridge wire connectors are UL listed and CSA certified



Color coded to industry standards



Temperature Rating:  
105°C (221°F)  
Maximum



Voltage rating 600 volts maximum building wires. (\*300 volts) 1000 volts maximum in signs and lighting fixtures (luminaries).

FOR USE WITH COPPER TO COPPER

## STANDARD WIRE CONNECTORS

**Spec:**

- Gray
- #22 - #14 AWG
- Temp. 105°C (221°F)
- 300 volt max.
- Min. 2#22 | Max. 2#16
- Strip solid wires 1/4" (6.4mm)
- Strip stranded wires 5/16" (7.9mm)
- UL 486C



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
104357	WCS-C8	Box of 100	10	10
105630	WCS-M8	Bag of 1000	20	20


**Spec:**

- Blue
- #22 - #14 AWG
- Temp. 105°C (221°F)
- 300 volt max.
- Min. 2#22 | Max. 3#16
- Strip wires 3/8" (9.5mm)
- For #16 and smaller wires, strip 1/2" (12.7mm)
- UL 486C



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
106521	CJ-WCB	Jar of 100	20	20
104356	WCS-C6	Box of 100	10	10
112715	WC11962	Bag of 25	12	120
105624	WCS-M6	Bag of 1000	10	10

All Cambridge wire connectors feature flame-retardant thermoplastic shell, providing excellent electrical insulation

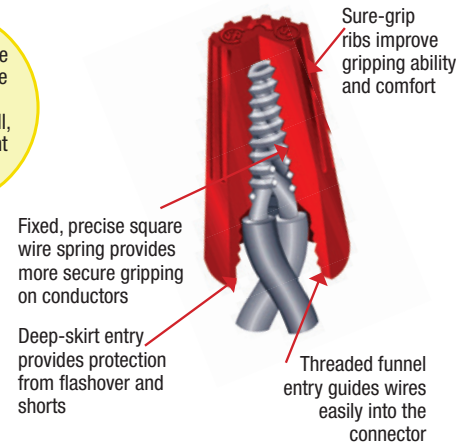

Fixed, precise square wire spring provides more secure gripping on conductors

Deep-skirt entry provides protection from flashover and shorts

Threaded funnel entry guides wires easily into the connector

Sure-grip ribs improve gripping ability and comfort

# STANDARD WIRE CONNECTORS CONTINUED

**Spec:**

- Orange
- #22 - #14 AWG
- Temp. 105°C (221°F)
- 600 volt max.
- Min. 1#18 w/1#20 | Max. 4#16 w/1#20
- Strip wires 5/16" (7.9mm)
- For #16 and smaller wires, strip 3/8" (9.5mm)
- UL 486C



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
106522	CJ-WCO	Jar of 100	20	20
104354	WCS-C3	Box of 100	10	10
112716	WC11963	Bag of 20	12	120
110274	WC13628	Bag of 25	25	25
105628	WCS-H3	Bag of 500	10	10

**Spec:**

- Yellow
- #22 - #10 AWG
- Temp. 105°C (221°F)
- 600 volt max.
- Min. 3#20 Sol | Max. 2#12 w/2#14
- Strip wires 3/8" (9.5mm)
- For #16 and smaller wires, strip 7/16" (11.1mm)
- UL 486C



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
106523	CJ-WCY	Jar of 100	20	20
104355	WCS-C4	Box of 100	10	10
112717	WC11964	Bag of 22	12	120
110273	WC13625	Bag of 25	25	25
105629	WCS-H4	Bag of 500	10	10

**Spec:**

- Red
- #22 - #10 AWG
- Temp. 105°C (221°F)
- 600 volt max.
- Min. 3#18 | Max. 2#10 Sol w/2#12 Str
- Strip wires 7/16" (11.1mm)
- For #16 and smaller wires, strip 1/2" (12.7mm)
- UL 486C



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
106515	CJ-WCR	Jar of 50	20	20
104353	WCS-C2	Box of 100	10	10
112718	WC11965	Bag of 15	12	120

**Spec:**

- Assorted
- UL 486C



ITEM#	SKU#	BREAKDOWN	UOM	ORDER MULTIPLE	MASTER QTY
110272	WC12996	3 Gray, 4 Blue, 6 Orange, 6 Yellow, 6 Red	Bag of 25	25	25
112714	WC11961	10 Gray, 10 Blue, 15 Orange, 15 Yellow, 5 Red	Bag of 55	12	120


# WINGED WIRE CONNECTORS

Cambridge wire connectors are UL listed and CSA certified

Color coded to industry standards  
**FOR USE WITH COPPER TO COPPER**

Temperature Rating:  
105°C (221°F)  
Maximum

Voltage rating 600 volts maximum building wires. (\*300 Volts) 1000 Volts maximum in signs and lighting fixtures (luminaries)



Swept-back wing design fits into your fingers naturally and provides fingertip comfort, resulting in increased torquing power

**Spec:**

- Yellow
- #18 - #10 AWG
- Temp. 105°C (221°F)
- 600 volt max.
- Min. 3#18 | Max. 3#14
- Strip wires 3/8" (9.5mm)
- UL 486C



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
104359	WCW-C4	Bag of 100	10	10
105632	WCW-H4	Bag of 500	10	10

**Spec:**

- Tan
- #22 - #8 AWG
- Temp. 105°C (221°F)
- 600 volt max.
- Min. 3#22 Sol | Max. 4#12
- Strip wires 1/2" (12.7mm)
- UL 486C



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
105141	WCW-CT	Bag of 100	10	10
105619	WCW-HT	Bag of 500	10	10

# WINGED WIRE CONNECTORS CONTINUED

**Spec:**

- Red
- #18 - #8 AWG
- Temp. 105°C (221°F)
- 600 volt max.
- Min. 3#16 | Max. 5#12 Sol
- Strip wires 5/8" (15.9mm)
- UL 486C



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
104358	WCW-C2	Bag of 100	10	10
105618	WCW-H2	Bag of 500	10	10

**Spec:**

- Gray
- #18 - #8 AWG
- Temp. 105°C (221°F)
- 600 volt max.
- Min. 3#14 W/1 #18 | Max. 3#10
- Strip wires 3/4" (19.1mm)
- UL 486C



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
105143	WCW-K8	Bag of 50	20	20
112719	WC11995	Bag of 6	12	120

**Spec:**

- Blue
- #14 - #6 AWG
- Temp. 105°C (221°F)
- 600 volt max.
- Min. 2#10 W/1 #12 | Max. 3#8 W/1 #12
- Strip wires 7/8" (22.2mm)
- UL 486C



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
106524	CJ-WWCB	Jar of 25	20	20
105142	WCW-K6	Bag of 50	20	20
105631	WCW-C6	Bag of 100	15	15

**Spec:**

- Assorted
- UL 486C



ITEM#	SKU#	BREAKDOWN	UOM	ORDER MULTIPLE	MASTER QTY
110275	WC13648	8 Yellow, 7 Tan, 8 Red, 2 Blue	Bag of 25	25	25

## TERMINALS

### PVC

PVC terminals have excellent insulation and flame retardancy.



### NYLON

Cambridge weatherproof terminals have a layer of nylon surrounding them. Once heated, it shrinks around the wire creating a weatherproof seal.



The Cambridge Terminal line covers the most commonly used electrical terminals.

See our electrical accessories catalog for a full line of bulk-packed terminals

## RING TERMINALS



**Spec:**

- Red • 8 AWG • PVC • UL 486A/B



ITEM#	SKU#	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112675	T11897	1/4"	Bag of 6	12	120
112674	T11895	1/4"	Bag of 25	12	120

**Spec:**

- Red • 22-16 AWG • PVC • UL 486A/B



ITEM#	SKU#	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112676	T11899	No. 8	Bag of 50	12	120
110972	T13756	No. 10	Clamshell of 21	6	120

**Spec:**

- Blue • 16-14 AWG • PVC • UL 486A/B



ITEM#	SKU#	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
110966	T13750	No. 8	Clamshell of 20	6	120
110960	T13740	No. 10	Clamshell of 18	6	120
112764	T11896	No. 10	Bag of 23	12	120
112673	T11894	No. 10	Bag of 50	12	120
110958	T13738	1/4"	Clamshell of 16	6	120
110964	T13747	3/8"	Clamshell of 14	6	120

**Spec:**

- Yellow • 12-10 AWG • PVC • UL 486A/B



ITEM#	SKU#	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112763	T11893	No. 10	Bag of 50	12	120
110961	T13744	No. 10	Clamshell of 13	6	120
110959	T13739	1/4"	Clamshell of 11	6	120
110949	T13729	5/16"	Clamshell of 11	6	120
110955	T13735	3/8"	Clamshell of 11	6	120



# RING TERMINALS continued



## WEATHERPROOF HEAT SEAL

### Spec:

• Blue • 16-14 AWG • Nylon • UL 486A/B



ITEM#	SKU#	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
110975	T13761	No. 10	Clamshell of 10	6	120
110970	T13754	1/4"	Clamshell of 10	6	120

### Spec:

• Yellow • 12-10 AWG • Nylon • UL 486A/B



ITEM#	SKU#	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
110971	T13755	1/4"	Clamshell of 7	6	120
110967	T13751	3/8"	Clamshell of 7	6	120

# SPADE TERMINALS



### Spec:

• Red • 22-16 AWG • PVC • UL 486A/B



ITEM#	SKU#	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112766	T11907	No. 8	Bag of 22	12	120

### Spec:

• Yellow • 12-10 AWG • PVC • UL 486A/B



ITEM#	SKU#	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112678	T11905	No. 10	Bag of 17	12	120
112677	T11902	No. 10	Bag of 50	12	120

### Spec:

• Red, Blue, Yellow • 22-16 AWG, 16-14 AWG, 12-10 AWG • PVC • UL 486A/B

ITEM#	SKU#	STUD SIZE	BREAKDOWN	UOM	ORDER MULTIPLE	MASTER QTY
110940	T12859	Red: No. 8, Blue: No. 8, Yellow: No. 8	8 Red, 7 Blue, 5 Yellow	Clamshell of 20	6	120



# LOCKING SPADE TERMINALS



### Spec:

• Blue • 16-14 AWG • PVC • UL 486A/B

ITEM#	SKU#	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112767	T11910	No. 8	Bag of 50	12	120



# FEMALE DISCONNECTS



### Spec:

• Red • 22-16 AWG • PVC • UL 310



ITEM#	SKU#	TAB SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112688	T11921	3/16"	Bag of 22	12	120
112686	T11919	1/4"	Bag of 22	12	120
112770	T11915	1/4"	Bag of 50	12	120

### Spec:

• Blue • 16-14 AWG • PVC • UL 310



ITEM#	SKU#	TAB SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112687	T11920	3/16"	Bag of 22	12	120
112685	T11918	3/16"	Bag of 50	12	120
110945	T13725	1/4"	Clamshell of 20	6	120
112683	T11916	1/4"	Bag of 22	12	120
112768	T11913	1/4"	Bag of 50	12	120

## FEMALE DISCONNECTS CONTINUED



### Spec:

• Yellow • 12-10 AWG • PVC • UL 310



ITEM#	SKU#	TAB SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112684	T11917	1/4"	Bag of 17	12	120
112769	T11914	1/4"	Bag of 50	12	120

## FEMALE DISCONNECTS



### FULLY INSULATED

### Spec:

• Red • 22-16 AWG • Nylon • UL 310



ITEM#	SKU#	TAB SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112777	T11938	1/4"	Bag of 11	12	120
112778	T11939	1/4"	Bag of 50	12	120

### Spec:

• Blue • 16-14 AWG • Nylon • UL 310



ITEM#	SKU#	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112697	T11957	1/4"	Bag of 14	12	120
112776	T11937	1/4"	Bag of 50	12	120

## FEMALE DISCONNECTS



### WEATHERPROOF HEAT SEAL

### Spec:

• Blue • 16-14 AWG • Nylon • UL 310



ITEM#	SKU#	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
110968	T13752	1/4"	Clamshell of 10	6	120

### Spec:

• Yellow • 12-10 AWG • Nylon • UL 310



ITEM#	SKU#	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
110978	T13766	1/4"	Clamshell of 7	6	120

## FEMALE DISCONNECTS



### NON-INSULATED

### Spec:

• UL 310

ITEM#	SKU#	AWG	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112772	T11926	16-14	1/4"	Bag of 100	12	120
112773	T11927	12-10	1/4"	Bag of 26	12	120



## MALE DISCONNECTS



### Spec:

• Blue • 16-14 AWG • PVC • UL 310

ITEM#	SKU#	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
110965	T13749	1/4"	Clamshell of 20	6	120



## MALE DISCONNECTS



### FULLY INSULATED

#### Spec:

• Blue • 16-14 AWG • Nylon • UL 310

ITEM#	SKU#	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112775	T11936	1/4"	Bag of 50	12	120



## MALE AND FEMALE DISCONNECT SETS



#### Spec:

• Red, Blue, Yellow • 22-16 AWG, 16-14 AWG, 12-10 AWG • PVC • UL 310

ITEM#	SKU#	STUD SIZE	BREAKDOWN	UOM	ORDER MULTIPLE	MASTER QTY
110956	T13736	Red: 1/4", Blue: 1/4", Yellow: 1/4"	2 Red (M), 2 Red (F), 4 Blue (M), 6 Blue (F), 2 Yellow (M), 2 Yellow (F)	Clamshell of 18	6	120



## MALE AND FEMALE DISCONNECT SETS



### FULLY INSULATED

#### Spec:

• Red • 22-16 AWG • Nylon • UL 310



ITEM#	SKU#	STUD SIZE	BREAKDOWN	UOM	ORDER MULTIPLE	MASTER QTY
110973	T13757	1/4"	5 Male, 5 Female	Clamshell of 10	6	120

#### Spec:

• Blue • 16-14 AWG • Nylon • UL 310



ITEM#	SKU#	STUD SIZE	BREAKDOWN	UOM	ORDER MULTIPLE	MASTER QTY
110954	T13734	1/4"	5 Male, 5 Female	Clamshell of 10	6	120
112774	T11935	1/4"	25 Male, 25 Female	Bag of 50	12	120

#### Spec:

• Yellow • 12-10 AWG • Nylon • UL 310



ITEM#	SKU#	STUD SIZE	BREAKDOWN	UOM	ORDER MULTIPLE	MASTER QTY
110969	T13753	1/4"	5 Male, 5 Female	Clamshell of 10	6	120

## BULLET AND RECEPTACLE CONNECTOR SETS



#### Spec:

• Blue • 16-14 AWG • PVC • UL 310

ITEM#	SKU#	STUD SIZE	BREAKDOWN	UOM	ORDER MULTIPLE	MASTER QTY
110963	T13746	0.157"	10 Bullet, 10 Receptacle	Clamshell of 20	6	120
111831	T12865	0.157"	5 Bullet, 5 Receptacle	Clamshell of 10	6	120



## BUTT CONNECTORS



#### Spec:

• Red • 22-18 AWG • PVC • UL 486A/B



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
110942	T13722	Clamshell of 21	6	120
112696	T11956	Bag of 26	12	120
112692	T11952	Bag of 50	12	120

#### Spec:

• Blue • 16-14 AWG • PVC • UL 486A/B



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
110943	T13723	Clamshell of 21	6	120
110937	T12835	Clamshell of 100	6	120
112690	T11950	Bag of 50	12	120
112691	T11951	Bag of 100	12	120
112695	T11955	Bag of 27	12	120

## BUTT CONNECTORS CONTINUED



### Spec:

• Yellow • 12-10 AWG • PVC • UL 486A/B



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
110952	T13732	Clamshell of 13	6	120
110938	T12837	Clamshell of 50	6	120
112694	T11954	Bag of 16	12	120
112693	T11953	Bag of 50	12	120

### Spec:

• Red, Blue, Yellow  
 • 22-18 AWG, 16-14 AWG, 12-10 AWG  
 • PVC  
 • UL 486A/B



ITEM#	SKU#	BREAKDOWN	UOM	ORDER MULTIPLE	MASTER QTY
110953	T13733	7 Red, 5 Blue, 4 Yellow	Clamshell of 16	6	120

## BUTT CONNECTORS



### WEATHERPROOF HEAT SEAL

### Spec:

• Red • 22-18 AWG • Nylon • UL 486A/B



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
110947	T13727	Clamshell of 10	6	120

### Spec:

• Yellow • 12-10 AWG • Nylon • UL 486A/B



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
110957	T13737	Clamshell of 7	6	120

### Spec:

• Blue • 16-14 AWG • Nylon • UL 486A/B



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
110944	T13724	Clamshell of 10	6	120

## PIGGYBACK DISCONNECTS



### Spec:

• Blue • 16-14 AWG • PVC • UL 310



ITEM#	SKU#	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112782	T11945	1/4"	Bag of 11	12	120

## COMPRESSOR TERMINALS



### Spec:

• 12-10 AWG • Non-insulated • UL 310



ITEM#	SKU#	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112771	T11922	1/4"	Bag of 19	12	120
112689	T11923	1/4"	Bag of 100	12	120

## TANDEM DISCONNECT ADAPTERS

### Spec:

• 2 Male, 1 Female



ITEM#	SKU#	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112780	T11942	1/4"	Bag of 27	12	120
112781	T11943	1/4"	Bag of 100	12	120

## QUICK-SPLICE CONNECTORS



### Spec:

• Yellow • 12-10 AWG • PVC • UL 486C



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
114252	T12863	Clamshell of 4	10	120

### Spec:

• Blue • 18-14 AWG • PVC • UL 486C



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
110948	T13728	Clamshell of 7	6	120
110951	T13731	Clamshell of 25	6	60

# QUICK-SPLICE CONNECTORS CONTINUED



## Spec:

- Red, Blue, Yellow
- 22-18 AWG, 16-14 AWG, 12-10 AWG
- PVC
- UL 486C



ITEM#	SKU#	BREAKDOWN	UOM	ORDER MULTIPLE	MASTER QTY
110962	T13745	6 Red, 12 Blue, 3 Yellow	Clamshell of 21	6	60

# QUICK-SPLICE CONNECTORS



## WEATHERPROOF

## Spec:

- Blue
- 18-14 AWG
- Nylon
- UL 486C



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
110906	T13742	Clamshell of 4	6	120

# FLAG DISCONNECTS



## FULLY INSULATED

## Spec:

- Blue
- 16-14 AWG
- Nylon
- UL 310



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
112779	T11940	Bag of 25	12	120

# RING LUGS

## Spec:

- Copper



ITEM#	SKU#	STUD SIZE	UOM	ORDER MULTIPLE	MASTER QTY
110946	T13726	3/8"	Clamshell of 2	6	120
110980	T13768	1/4"	Clamshell of 2	6	120
110979	T13767	3/8"	Clamshell of 2	6	120

# CLOSED-END CONNECTORS



## Spec:

- Copper/Nylon
- UL 486C



ITEM#	SKU#	AWG	UOM	ORDER MULTIPLE	MASTER QTY
112698	T11968	18-10	Bag of 50	12	120
113062	T11967	22-14	Bag of 50	12	120


# HEAT SHRINK TUBING

ITEM# 111002  
SKU# WM13780

UOM: Clamshell of 5  
ORDER MULTIPLE: 6 MASTER QTY: 120

## Breakdown:

- (1) 5.75" L x 1/2" Diameter
- (1) 5.75" L x 3/8" Diameter
- (1) 5" L x 5/32" Diameter
- (1) 5.75" L x 1/4" Diameter
- (1) 5" L x 3/16" Diameter



# TEST LEADS

## ALLIGATOR TEST CLIPS

## Spec:

- Steel
- Max Amp: 1.5
- Comes with screw



ITEM# 110929  
SKU# SW13705

UOM: Blister of 6  
ORDER MULTIPLE: 6 MASTER QTY: 120

## TEST LEADS

## Spec:

- Insulated clamps
- 30 AMP
- Black and red handles



ITEM# 110931  
SKU# SW13707

UOM: Blister of 2  
ORDER MULTIPLE: 6 MASTER QTY: 60

## TEST LEADS WITH ALLIGATOR CLIPS

## Spec:

- Steel
- Max Amp: 1.5
- 22GA
- 30" Length



ITEM# 110930  
SKU# SW13706

UOM: Blister of 1  
ORDER MULTIPLE: 6 MASTER QTY: 120

## CRIMPER STRIPPERS



ITEM# 112699 SKU# TL14634 UOM: 1  
ORDER MULTIPLE: 12  
MASTER QTY: 12

- Crimps insulated and non-insulated terminals
- Features two precision ground wire cutters, one on the nose and one behind the pivot point
- Plastic cushion handle
- Cut & strip 10-24 gauge wires
- Strips standard wire 22-10 gauge
- Strips solid wire 18-8 gauge



ITEM# 110985 SKU# TL13716 UOM: 1  
ORDER MULTIPLE: 4  
MASTER QTY: 24

Easily cut, strip and crimp 10-22 gauge wires with the Cambridge crimping stripper tool.



ITEM# 110983 SKU# TL13714 UOM: 1  
ORDER MULTIPLE: 4  
MASTER QTY: 24

The Cambridge self-adjusting crimping/striping tool makes repair and assembly projects more efficient for both home and professional users. The adjustable swivel knob allows for wire gauges between 10-24 AWG.

## TERMINAL KITS

ITEM# 106531 SKU# CTK-180  
BREAKDOWN: 181 pcs UOM: 1 Kit  
ORDER MULTIPLE: 20  
MASTER QTY: 20

Assorted ring terminals, spade terminals, butt connectors, male disconnects, female disconnects, and crimping tool.



- 10 Red Ring Terminals 22-18 AWG #6
- 10 Red Ring Terminals 22-18 AWG #8
- 10 Red Ring Terminals 22-18 AWG #10
- 10 Blue Ring Terminals 16-14 AWG #6
- 10 Blue Ring Terminals 16-14 AWG #8
- 10 Blue Ring Terminals 16-14 AWG #10
- 5 Yellow Ring Terminals 12-10 AWG #10
- 10 Red Spade Terminals 22-18 AWG #8
- 10 Red Spade Terminals 22-18 AWG #10
- 10 Blue Spade Terminals 16-14 AWG #8
- 10 Blue Spade Terminals 16-14 AWG #10
- 5 Yellow Spade Terminals 12-10 AWG #10
- 10 Red Butt Connectors 22-18 AWG
- 10 Blue Butt Connectors 16-14 AWG
- 10 Yellow Butt Connectors 12-10 AWG
- 10 Red Male Disconnects 22-18 AWG .25"
- 10 Blue Male Disconnects 16-14 AWG .25"
- 10 Red Female Disconnects 22-18 AWG .25"
- 10 Blue Female Disconnects 16-14 AWG .25"
- 1 8" Crimping tool

ITEM# 106532 SKU# CTK-510  
BREAKDOWN: 510 pcs UOM: 1 Kit  
ORDER MULTIPLE: 5  
MASTER QTY: 5

Assorted ring terminals, spade terminals, butt connectors, male disconnects, and female disconnects.



- 40 Red Ring Terminals 22-18 AWG #10
- 40 Red Ring Terminals 22-18 AWG #6
- 30 Blue Ring Terminals 16-14 AWG #10
- 30 Blue Ring Terminals 16-14 AWG #6
- 20 Yellow Ring Terminals 12-10 AWG #8
- 20 Yellow Ring Terminals 12-10 AWG .25"
- 40 Red Spade Terminals 22-18 AWG #10
- 40 Red Spade Terminals 22-18 AWG #6
- 25 Blue Spade Terminals 16-14 AWG #10
- 25 Blue Spade Terminals 16-14 AWG #6
- 15 Yellow Spade Terminals 12-10 AWG #8
- 15 Yellow Spade Terminals 12-10 AWG .25"
- 35 Red Butt Connectors 22-18 AWG
- 25 Blue Butt Connectors 16-14 AWG
- 15 Yellow Butt Connectors 12-10 AWG
- 40 Red Female Disconnects 22-18 AWG .25"
- 35 Blue Female Disconnects 16-14 AWG .25"
- 20 Yellow Female Disconnects 12-10 AWG .25"

## ELECTRICAL TOOLS

### CIRCUIT ELECTRICAL TESTER

The Cambridge electrical circuit tester tests wire and indicates if the electrical socket is wired properly.

ITEM# 110986  
SKU# TL13717  
UOM: Blister of 1  
ORDER MULTIPLE: 4 MASTER QTY: 24



### SOLDERING IRON



The Cambridge soldering iron heats up quickly, is UL listed and comes with a safety stand.

ITEM# 110982  
SKU# TL13713  
UOM: Blister of 1  
ORDER MULTIPLE: 4 MASTER QTY: 24



### MINI BUTANE TORCH

Cambridge mini butane torch comes with a refillable fuel cartridge. It is ideal for heat shrinking terminals and tubing. It comes with a CPSC certified child safety lock and is a compact size which allows the unit to fit easily into any tool kit.

ITEM# 110984  
SKU# TL13715  
UOM: Blister of 1  
ORDER MULTIPLE: 20 MASTER QTY: 120

Temperature: 2372°F (1300°C)



\*Fuel not included




# MERCHANDISING DISPLAY

Cambridge POP items are designed to catch customers' attention and prompt them to make additional purchases leading to increased sales. Many point of purchase displays and items can be customized according to the business's requirement and can be tailored to any audience.

\*Cross references available upon request

## Planogram Option A

For other planogram options please contact your sales rep

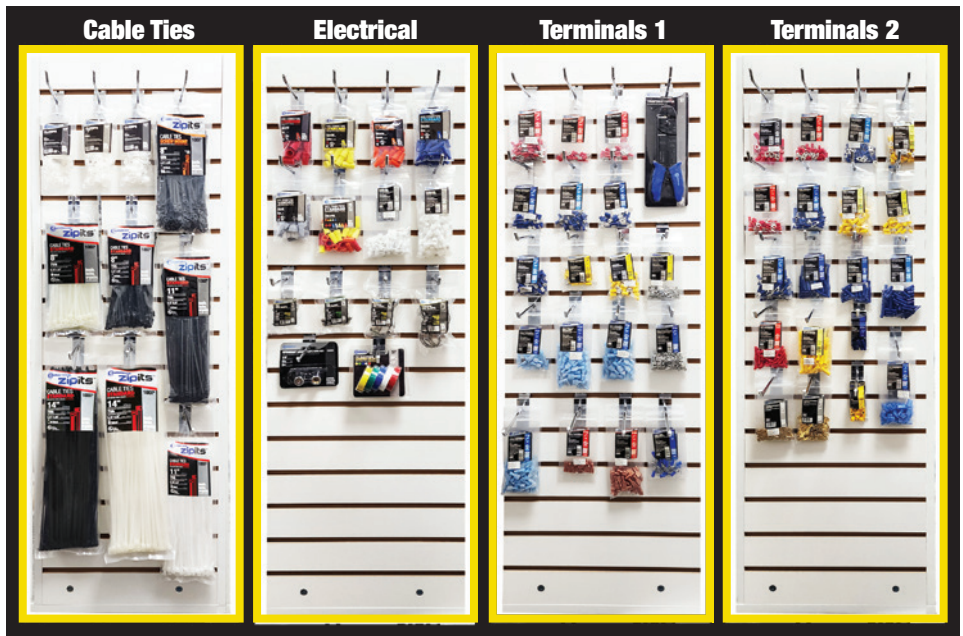

Cable Ties			
112740 Natural Cable Clamps P. 20	112742 Natural Cable Clamps P. 20	112741 Natural Cable Clamps P. 20	110867 8" UV Black Screw Mount Cable Ties P. 19
109966 8" Standard Natural Cable Ties P. 19	109967 8" Standard UV Black Cable Ties P. 19		109969 11" Standard UV Black Cable Ties P. 19
110859 14" Standard UV Black Cable Ties P. 19	110860 14" Standard Natural Cable Ties P. 19		109971 11" Standard Natural Cable Ties P. 19

### Cable Ties - Side 1

Order listing goes from left to right starting at the top

ITEM#	DESCRIPTION	UOM	PAGE#
112740	Cable Clamp 1/4 In Natural	48/pk	20
112742	Cable Clamp 1/2 In Natural	25/PK	20
112741	Cable Clamp 3/8 In Natural	41/PK	20
110867	Cable Tie Screw Mount 8 In 50 Lb Natural	100/PK	19
109966	Cable Tie 8 In 75 Lb Natural	100/PK	19
109967	Cable Tie 8 In 75 Lb UV Black	100/PK	19
109969	Cable Tie 11 In 75 Lb UV Black	100/PK	19
110859	Cable Tie 14 In 75 Lb UV Black	100/PK	19
110860	Cable Tie 14 In 75 Lb Natural	100/PK	19
109971	Cable Tie 11 In 75 Lb Natural	100/PK	19

Electrical			
112718 Red Standard Wire Connectors P. 23	112717 Yellow Standard Wire Connectors P. 23	112716 Orange Standard Wire Connectors P. 23	112715 Blue Standard Wire Connectors P. 22
112719 Gray Winged End Connectors P. 23	112714 Assorted Standard End Connectors P. 23	113062 Closed End Connectors P. 29	112698 Closed End Connectors P. 29
112667 SAE 4 Hose Clamps P. 8	112743 SAE 6 Hose Clamps P. 8	112745 SAE 10 Hose Clamps P. 8	112744 SAE 16 Hose Clamps P. 8
200659 Refrigerant Locking Caps P. 75	110909 Electrical Tape P. 22		

### Electrical - Side 2

Order listing goes from left to right starting at the top

ITEM#	DESCRIPTION	UOM	PAGE#
112718	Wire Connector Standard Red	15/PK	23
112717	Wire Connector Standard Yellow	22/PK	23
112716	Wire Connector Standard Orange	20/PK	23
112715	Wire Connector Standard Blue	25/PK	22
112719	Wire Connector Winged Gray	6/PK	23
112714	Wire Connector Standard Assorted	55/PK	23
113062	Closed End Connector AWG 22-14 Nylon	50/PK	29
112698	Closed End Connector AWG 18-10 Nylon	50/PK	19
112667	Hose Clamp SAE #4 5/16 Band SS Band	6/PK	8 / 69
112743	Hose Clamp SAE #6 5/16 Band SS Band	6/PK	8 / 69
112745	Hose Clamp SAE #10 1/2 Band SS Band	6/PK	8 / 69
112744	Hose Clamp SAE #16 1/2 Band SS Band	6/PK	8 / 69
200659	Refrigerant Locking Caps	2/PK	75
110909	Electrical Tape Assorted	5/PK	22

Terminals			
112770 22-16 Female Disconnect P. 25	112688 22-16 Female Disconnect P. 25	112686 22-16 Female Disconnect P. 25	112699 Crimper Stopper Tool P. 30
112687 16-14 Female Disconnect P. 25	112695 16-14 Female Disconnect P. 25	112693 16-14 Female Disconnect P. 25	
112768 16-14 Female Disconnect P. 25	112684 12-10 Female Disconnect P. 26	112769 12-10 Female Disconnect P. 26	112773 12-10 Non-insulated Female Disconnect P. 26
112697 16-14 Insulated Female Disconnect P. 26	112774 16-14 Insulated Female Disconnect P. 27	112775 16-14 Insulated Female Disconnect P. 26	112772 16-14 Non-insulated Female Disconnect P. 26
112776 16-14 Insulated Female Disconnect P. 26	112777 22-16 Insulated Female Disconnect P. 26	112778 22-16 Insulated Female Disconnect P. 26	112782 16-14 Piggy Back Female Disconnect P. 28

### Terminals 1 - Side 3

Order listing goes from left to right starting at the top

ITEM#	DESCRIPTION	UOM	PAGE#
112770	Disconnect Female 22-16 Red 1/4 PVC	50/PK	25
112688	Disconnect Female 22-16 Red 3/16 PVC	22/PK	25
112686	Disconnect Female 22-16 Red 1/4 PVC	22/PK	25
112699	Crimping Tool Insulated	1	30
112687	Disconnect Female 16-14 Blue 3/16 PVC	22/PK	25
112685	Disconnect Female 16-14 Blue 3/16 PVC	50/PK	25
112683	Disconnect Female 16-14 Blue 1/4 PVC	22/PK	25
112768	Disconnect Female AWG 16-14 Blue 1/4	50/PK	25
112684	Disconnect Female AWG 12-10 Yellow	17/PK	26
112769	Disconnect Female AWG 12-10 Yellow	50/PK	26
112773	Disconnect Female Uninsulated 12-10	26/PK	26
112697	Disconnect Female AWG 16-14 PVC	14/PK	26
112774	Disconnect Male/Fem Insulated 16-14	50/PK	27
112775	Disconnect Male Insulated AWG 16-14	50/PK	27
112772	Disconnect Female Uninsulated 16-14	100/PK	26
112776	Disconnect Female Insulated 16-14 1/4	50/PK	26
112777	Disconnect Female Insulated 22-16 1/4	11/PK	26
112778	Disconnect Female Insulated 22-16 1/4	50/PK	26
112782	Disconnect Piggyback 16-14 Blue 1/4	11/PK	28

Terminals			
112674 8 Ring Terminal P. 24	112676 22-16 Ring Terminal P. 24	112673 16-14 Ring Terminal P. 24	112763 12-10 Ring Terminal P. 24
112766 22-16 Spade Terminal P. 25	112765 16-14 Spade Terminal P. 25	112677 12-10 Spade Terminal P. 25	112678 12-10 Spade Terminal P. 25
112767 16-14 Locking Spade P. 27	112690 16-14 Butt Connector P. 27	112695 16-14 Butt Connector P. 27	112691 16-14 Butt Connector P. 27
112692 22-18 Butt Connector P. 27	112693 12-10 Butt Connector P. 28	110963 16-14 Butt Connector P. 27	112779 16-14 Butt Connector P. 29
112780 Tandem Disconnect Actuator P. 28	112781 Tandem Disconnect Actuator P. 28	110961 12-10 Ring Terminal P. 24	

### Terminals 2 - Side 4

Order listing goes from left to right starting at the top

ITEM#	DESCRIPTION	UOM	PAGE#
112674	Ring Terminal AWG 8 Red 1/4 Stud PVC	25/PK	24
112676	Ring Terminal 22-16 Red 8 Stud PVC	50/PK	24
112673	Ring Terminal 16-14 Blue 10 Stud PVC	50/PK	24
112763	Ring Terminal 12-10 Yellow 10 Stud PVC	50/PK	24
112766	Spade Terminal 22-16 Red 8 Stud PVC	22/PK	25
112765	Ring Terminal AWG 8 Red 1/4 Stud PVC	6/PK	24
112677	Spade Terminal 12-10 Yellow 10 Stud	50/PK	25
112678	Spade Terminal 12-10 Yellow 10 Stud	17/PK	25
112767	Spade Terminal Locking 16-14 Blue	50/PK	25
112690	Butt Connector AWG 16-14 Blue PVC	50/PK	27
112695	Butt Connector AWG 16-14 Blue PVC	27/PK	27
112691	Butt Connector AWG 16-14 Blue PVC	100/PK	27
112692	Butt Connector AWG 22-16 Red PVC	50/PK	27
112693	Butt Connector AWG 12-10 Yellow PVC	50/PK	28
110963	Disconnect Bullet Male/Fem 16-14 Blue	20/PK	27
112779	Disconnect Flag Insulated 16-14 Blue	25/PK	29
112780	Disconnect 1 Female 2 Male PVC	27/PK	28
112781	Disconnect 1 Female 2 Male PVC	100/PK	28
110961	Ring Terminal 12-10 Yellow 10 Stud PVC	13/PK	24

# MERCHANDISING SKU OPTIONS

\*Cross references available upon request

ITEM#	SKU#	DESCRIPTION	UOM	PAGE#
105793	HC2-36S	Hose Clamp SAE #36 1/2 Band Stainless Steel	10/PK	8 / 69
112667	HC14635	Hose Clamp SAE #4 5/16 Band SS/Band Pltd/Scrw	6/PK	8 / 69
112743	HC14636	Hose Clamp SAE #6 5/16 Band SS/Band Pltd/Scrw	6/PK	8 / 69
112744	HC14637	Hose Clamp SAE #16 1/2 Band SS/Band Pltd/Scrw	6/PK	8 / 69
112745	HC14638	Hose Clamp SAE #10 1/2 Band SS/Band Pltd/Scrw	6/PK	8 / 69
103709	CT5-18M9	Cable Tie Mini 5.5 In 18 Lb Natural	1000/PK	18
104304	CT8-18COW	Cable Tie 8 In 18 Lb UV Black	100/PK	19
109966	CT12780	Cable Tie 8 In 75 Lb Natural	100/PK	19
109967	CT12781	Cable Tie 8 In 75 Lb UV Black	100/PK	19
109969	CT12783	Cable Tie 11 In 75 Lb UV Black	100/PK	19
109971	CT12785	Cable Tie 11 In 75 Lb Natural	100/PK	19
110860	CT10287	Cable Tie 14 In 75 Lb Natural	100/PK	19
110859	CT10276	Cable Tie 14 In 75 Lb UV Black	100/PK	19
103848	CTM6-40C9	Cable Tie Screw Mount 6 In 40 Lb Natural	100/PK	19
110867	CT14088	Cable Tie Screw Mount 8 In 50 Lb Natural	100/PK	19
110868	CT14089	Cable Tie Screw Mount 8 In 50 Lb UV Black	100/PK	19
110919	SW12929	Metal Bat Toggle Switch With Screw On Off 15A	1	18
112746	SW14596	Metal Bat Toggle Switch On Off 15A	1	18
112888	SW14617	Switch Cover Single Gang Duplex Receptacle Steel	1	17
112699	TL14634	Crimping Tool Insulated	1	30
110951	T13731	Quick Splice AWG 18-14 Blue PVC	25/PK	28
110959	T13739	Ring Terminal AWG 12-10 Yellow 1/4 Stud PVC	11/PK	24
110961	T13744	Ring Terminal AWG 12-10 Yellow 10 Stud PVC	13/PK	24
112763	T11893	Ring Terminal AWG 12-10 Yellow 10 Stud PVC	50/PK	24
112673	T11894	Ring Terminal AWG 16-14 Blue 10 Stud PVC	50/PK	24
112674	T11895	Ring Terminal AWG 8 Red 1/4 Stud PVC	25/PK	24
112764	T11896	Ring Terminal AWG 16-14 Blue 10 Stud PVC	23/PK	24
112675	T11897	Ring Terminal AWG 8 Red 1/4 Stud PVC	6/PK	24
112676	T11899	Ring Terminal AWG 22-16 Red 8 Stud PVC	50/PK	24
112677	T11902	Spade Terminal AWG 12-10 Yellow 10 Stud PVC	50/PK	25
112765	T11903	Spade Terminal AWG 16-14 Blue 8 Stud PVC	50/PK	25
112678	T11905	Spade Terminal AWG 12-10 Yellow 10 Stud PVC	17/PK	25
112679	T11906	Spade Terminal AWG 16-14 Blue 8 Stud PVC	22/PK	25
112766	T11907	Spade Terminal AWG 22-16 Red 8 Stud PVC	22/PK	25
112767	T11910	Spade Terminal Locking AWG 16-14 Blue 8 Stud PVC	50/PK	25
110953	T13733	Butt Connector Assortment	16/PK	28
112690	T11950	Butt Connector AWG 16-14 Blue PVC	50/PK	27
112691	T11951	Butt Connector AWG 16-14 Blue PVC	100/PK	27
112692	T11952	Butt Connector AWG 22-16 Red PVC	50/PK	27
112693	T11953	Butt Connector AWG 12-10 Yellow PVC	50/PK	28
112695	T11955	Butt Connector AWG 16-14 Blue PVC	27/PK	27
112687	T11920	Disconnect Female AWG 16-14 Blue 3/16 PVC	22/PK	25
112688	T11921	Disconnect Female AWG 22-16 Red 3/16 PVC	22/PK	25
112772	T11926	Disconnect Female Uninsulated AWG 16-14 1/4 PVC	100/PK	26
112773	T11927	Disconnect Female Uninsulated AWG 12-10 1/4 PVC	26/PK	26
112776	T11937	Disconnect Female Insulated AWG 16-14 1/4 Nylon	50/PK	26
112777	T11938	Disconnect Female Insulated AWG 22-16 1/4 Nylon	11/PK	26
112778	T11939	Disconnect Female Insulated AWG 22-16 1/4 Nylon	50/PK	26
112768	T11913	Disconnect Female AWG 16-14 Blue 1/4 PVC	50/PK	25
112769	T11914	Disconnect Female AWG 12-10 Yellow 1/4 PVC	50/PK	26
112770	T11915	Disconnect Female AWG 22-16 Red 1/4 PVC	50/PK	25
112683	T11916	Disconnect Female AWG 16-14 Blue 1/4 PVC	22/PK	25

ITEM#	SKU#	DESCRIPTION	UOM	PAGE#
112684	T11917	Disconnect Female AWG 12-10 Yellow 1/4 PVC	17/PK	26
112685	T11918	Disconnect Female AWG 16-14 Blue 3/16 PVC	50/PK	25
112697	T11957	Disconnect Female AWG 16-14 PVC	14/PK	26
112686	T11919	Disconnect Female AWG 22-16 Red 1/4 PVC	22/PK	25
110965	T13749	Disconnect Male Insulated AWG 16-14	20/PK	26
112775	T11936	Disconnect Male Insulated AWG 16-14 1/4 Nylon	50/PK	27
112774	T11935	Disconnect Male/Fem Insulated AWG 16-14 1/4 Nylon	50/PK	27
112771	T11922	Disconnect Female Uninsulated AWG 12-10 PVC	19/PK	28
112780	T11942	Disconnect 1 Female 2 Male PVC	27/PK	28
112781	T11943	Disconnect 1 Female 2 Male PVC	100/PK	28
112782	T11945	Disconnect Piggyback AWG 16-14 Blue 1/4 PVC	11/PK	28
112779	T11940	Disconnect Flag Insulated AWG 16-14 Blue Nylon	25/PK	29
110963	T13746	Disconnect Bullet Male/Fem AWG 16-14 Blue .156 PVC	20/PK	27
113062	T11967	White Closed End Connector AWG 22-14 Nylon	50/PK	29
112698	T11968	White Closed End Connector AWG 18-10 Nylon	50/PK	29
110931	SW13707	Insulated Clamps 30 AMP	1	29
112719	WC11995	Wire Connector Winged Gray	6/PK	23
104359	WCW-C4	Wire Connector Winged Yellow	100/PK	23
104358	WCW-C2	Wire Connector Winged Red	100/PK	24
112714	WC11961	Wire Connector Standard Assorted Rd/YI/Or/BI/Gr	55/PK	23
104357	WCS-C8	Wire Connector Standard Gray	100/PK	22
112715	WC11962	Wire Connector Standard Blue	25/PK	22
112716	WC11963	Wire Connector Standard Orange	20/PK	23
112717	WC11964	Wire Connector Standard Yellow	22/PK	23
112718	WC11965	Wire Connector Standard Red	15/PK	23
113068	W14646	Conduit Nipple Offset 1/2 In Steel	2/PK	17
112783	T14588	Conduit Service Connector 3/8 Nom 1/2 In Knockout	25/PK	16
112785	T14590	Conduit Service Connector 3/8 Nom 1/2 In Knockout	8/PK	16
113063	T14591	Conduit Flex Connector 90 Deg 3/8In 1/2In Knockout	3/PK	17
103818	CC5-1/8	Cable Clamp 1/8 In Natural 100/Pk	100/PK	20
112740	CL14585	Cable Clamp 1/4 In Natural	48/pk	20
112741	CL14586	Cable Clamp 3/8 In Natural	41/PK	20
112742	CL14587	Cable Clamp 1/2 In Natural	25/PK	20
103729	ACMB11C	Cable Tie Adhesive Mount 1.1 In Natural	100/PK	20
109977	CT12793	Cable Tie Adhesive Mount 1.1 In Natural	10/PK	21
200066	200066	Hook-Up Wire Black 14 Awg 48 Ft THHN UL Strnd 600V	48'	21
200068	200068	Hook-Up Wire Red 14 Awg 48 Ft THHN UL Strnd 600V	48'	21
200071	200071	Hook-Up Wire White 14 Awg 48 Ft THHN UL Strnd 600V	48'	21
200067	200067	Hook-Up Wire Black 12 Awg 48 Ft THHN UL Strnd 600V	48'	21
200073	200073	Hook-Up Wire Red 12 Awg 48 Ft THHN UL Strnd 600V	48'	21
200075	200075	Hook-Up Wire White 12 Awg 48 Ft THHN UL Strnd 600V	48'	21
200065	200065	Hook-Up Wire Black 10 Awg 48 Ft THHN UL Strnd 600V	48'	21
200074	200074	Hook-Up Wire Red 10 Awg 48 Ft THHN UL Strnd 600V	48'	21
200076	200076	Hook-Up Wire White 10 Awg 48 Ft THHN UL Strnd 600V	48'	21
200079	200079	Sjto Service Wire 14 20FT UI Listed 300V	20FT	21
111002	WM13780	Heat Shrink Tubing Assortment	5/PK	29
112701	W14643	90o Power Supply Cord	1	18
112787	W14642	Straight Power Supply Cord	1	18
200558	200558	Drain Cleaning Tool	1	81
200562	200562	CO2 Cartridges 16G Capacity, Non Threaded	12/PK	81
200559	200559	Refrigerant Locking Caps	2/PK	75
110909	ET12885	Electrical Tape Assorted- Red, Yellow, Blue, Green, White	5/PK	22






# HEATING PRODUCTS

Black Cut Steel Pipe .....	54	Gas Connectors.....	34-42
Black Malleable Iron Pipe Fittings .....	45-50	Black Coated Gas Connectors.....	41
Black Merchant Couplings.....	54	Gas Connector Display.....	42
Black Steel Nipples.....	51-53	Gas Connector Display Hooks.....	42
Cloth Towels .....	50	Gas Connector Kits .....	42
Concentric Vent Kit .....	45	Infrared Gas Connectors .....	42
Dielectric Gas Union .....	43	PVC (Gray) Coated Gas Connectors.....	42
Flare Fittings.....	44	Standard Gas Connectors .....	34-38
Brass Flare Elbows .....	44	Yellow Coated Gas Connectors .....	38-40
Brass Forged Swivel Flare Connector.....	44	Gas Test Gauges .....	45
Brass Flare Union .....	44	Gas Valves .....	43
Brass Short Flared Rod Nut .....	44	Ball Valves - One Piece Construction.....	43
Brass Short Forged Flare Nuts.....	44	Flared/Threaded Valves .....	43
Steel Flare x FIP Unions.....	44	Threaded Ball Valves.....	43
Steel Flare x MIP Unions.....	44	Pipe Displays .....	54

# GAS CONNECTORS

## REFERENCE NUMBER KEY

EXAMPLE: **C-GCY-581234MF-12V**

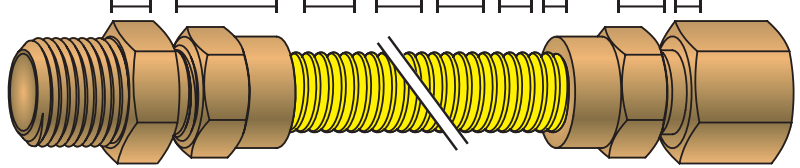

Cambridge gas connectors can be ordered in any combination of O.D. size, fitting sizes and styles, lengths, and with or without coating/valves. If you do not see your specific one listed in the catalog please call our customer service line to request it. Lead times may apply.

Coating	O.D.	FITTING SIZE	FITTING TYPE	LENGTH
Y: Yellow	10: 1" (3/4" ID)	10: 1"	M: MIP	12"
B: Black	58: 5/8" (1/2" ID)	34: 3/4"	F: FIP	18"
G: Gray	12: 1/2" (3/8" ID)	12: 1/2"		24"
	38: 3/8" (1/4" ID)	38: 3/8"		30"
				36"
				48"
				60"
				72"

## GAS CONNECTOR SIZE REFERENCE CHART


GAS BTU RATING	Straight Length Capacity-Btu Per Hr using:0.64Sp Gr, 1000 Btu Per Cu Ft (37.5MJ Per Cu Meter) Gas at 0.5 inch Water Column (124 Pa) Pressure Drop. The capacity at 50 Pa (0.2 inch water column) pressure drop can be determined by multiplying the BTU per hr. listed in the table below by 0.632.							
	12"	18"	24"	30"	36"	48"	60"	72"
1" OD (3/4" ID)			250,900	270,500	255,900	215,000	197,400	173,900
5/8" OD (1/2" ID)	180,000	164,200	150,000	136,000	125,000	106,000	93,200	86,000
1/2" OD (3/8" ID)	102,000	93,100	85,000	77,100	71,100	60,500	53,200	49,100
3/8" OD (1/4" ID)	48,000	43,800	40,000	36,400	33,400	28,300	24,900	23,100

Indoor	Outdoor	Manufactured Home	FEATURES	BENEFITS
<p>Gas Ranges, Water Heaters, Tankless Water Heaters, Wall Heaters, Dryers, Gas Fireplaces, Furnaces, Garage Heaters</p> <p>CSA Design Certified to ANSI Z21.24/CSA 6.10, Cambridge Gas Connectors are durable and reliable. Their flexibility makes them easy to install, especially in tight spaces. Cambridge Gas Connectors are designed to put safety first, so you can feel confident in using them for all residential gas appliances.</p>	<p>Stationary Outdoor Grills, Gas Fire Pits, Outdoor Dryers, Rooftop Units</p> <p>CSA Design Certified to ANSI Z21.75/CSA 6.27, Cambridge Gas Connectors are perfect for outdoor installation of fixed appliances.</p>	<p>Mobile Home Gas Meters, Cross-over Gas Connection Kits</p> <p>CSA Design Certified to ANSI Z21.75/CSA 6.27, Cambridge Gas Connectors are ideal for use in park trailers and manufactured (mobile) homes. High BTU capacity enables proper gas flow.</p>	<p>304 stainless steel Markings stamped on nut</p> <p>Annealed steel construction</p> <p>MIP fittings tapped female for next smaller size</p> <p>CSA design certified for indoor/outdoor use with natural, manufactured, mixed, liquified, petroleum (LP), and LP-gas air mixtures</p>	<p>Durable, reliable, corrosion-resistant design</p> <p>Eliminates unnecessary vibration</p> <p>Provides added strength and flexibility; reduces stress corrosion cracking risks</p> <p>Creates a metal to metal seal assuring critical application integrity and consistency</p> <p>Quality, safety, assurance</p>

# STANDARD GAS CONNECTORS



Cambridge standard gas connectors are composed of corrosion-resistant 304 stainless steel which provides extra strength while maintaining flexibility. Their flared-end fitting provides a secure metal-to-metal seal, making them ideal for both indoor and outdoor applications. Cambridge gas connectors are CSA certified for use with natural gas and are suitable for kitchen appliances, gas ranges, and hot water heaters.



**Spec:**

- Corrosion-resistant 304 stainless steel
- Flared-end fitting
- Indoor and outdoor use
- CSA certified for use with natural gas
- ANSI Z21.24, Z21.75/CSA 6.10, 6.27

## STANDARD 3/8" OD (1/4" ID)

### 3/8" OD (1/4" ID) 3/8" MIP x 3/8" MIP Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
114357	C-GC-383838MM-24	Gas Connector - 24" long, 3/8" OD x 1/4" ID, 3/8" MIP x 3/8" MIP	24"	1	25	25
114358	C-GC-383838MM-36*	Gas Connector - 36" long, 3/8" OD x 1/4" ID, 3/8" MIP x 3/8" MIP	36"	1	25	25

### 3/8" OD (1/4" ID) 3/8" MIP x 3/8" FIP Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
200092	C-GC-383838MF-12	Gas Connector - 12" long, 3/8" OD x 1/4" ID, 3/8" MIP x 3/8" FIP	12"	1	25	25
200093	C-GC-383838MF-18	Gas Connector - 18" long, 3/8" OD x 1/4" ID, 3/8" MIP x 3/8" FIP	18"	1	25	25
112898	C-GC-383838MF-24	Gas Connector - 24" long, 3/8" OD x 1/4" ID, 3/8" MIP x 3/8" FIP	24"	1	25	25
112899	C-GC-383838MF-30	Gas Connector - 30" long, 3/8" OD x 1/4" ID, 3/8" MIP x 3/8" FIP	30"	1	25	25
112900	C-GC-383838MF-36	Gas Connector - 36" long, 3/8" OD x 1/4" ID, 3/8" MIP x 3/8" FIP	36"	1	25	25
112901	C-GC-383838MF-48	Gas Connector - 48" long, 3/8" OD x 1/4" ID, 3/8" MIP x 3/8" FIP	48"	1	25	25
112902	C-GC-383838MF-60	Gas Connector - 60" long, 3/8" OD x 1/4" ID, 3/8" MIP x 3/8" FIP	60"	1	25	25
112903	C-GC-383838MF-72	Gas Connector - 72" long, 3/8" OD x 1/4" ID, 3/8" MIP x 3/8" FIP	72"	1	25	25



### 3/8" OD (1/4" ID) 3/8" MIP x 1/2" FIP Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
112318	C-GC-383812MF-12*	Gas Connector - 12" long, 3/8" OD x 1/4" ID, 3/8" MIP x 1/2" FIP	12"	1	25	25
112319	C-GC-383812MF-18*	Gas Connector - 18" long, 3/8" OD x 1/4" ID, 3/8" MIP x 1/2" FIP	18"	1	25	25
112320	C-GC-383812MF-24	Gas Connector - 24" long, 3/8" OD x 1/4" ID, 3/8" MIP x 1/2" FIP	24"	1	25	25
112321	C-GC-383812MF-36	Gas Connector - 36" long, 3/8" OD x 1/4" ID, 3/8" MIP x 1/2" FIP	36"	1	25	25
112322	C-GC-383812MF-48	Gas Connector - 48" long, 3/8" OD x 1/4" ID, 3/8" MIP x 1/2" FIP	48"	1	25	25
112323	C-GC-383812MF-60	Gas Connector - 60" long, 3/8" OD x 1/4" ID, 3/8" MIP x 1/2" FIP	60"	1	25	25

If you do not see a size you need listed please contact our sales team. We can customize any part. Lead times may apply.

### 3/8" OD (1/4" ID) 1/2" MIP x 1/2" MIP Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
120143	C-GC-381212MM-18	Gas Connector - 18" long, 3/8" OD x 1/4" ID, 1/2" MIP x 1/2" MIP	24"	1	25	25
200094	C-GC-381212MM-24	Gas Connector - 24" long, 3/8" OD x 1/4" ID, 1/2" MIP x 1/2" MIP	24"	1	25	25
120144	C-GC-381212MM-36	Gas Connector - 36" long, 3/8" OD x 1/4" ID, 1/2" MIP x 1/2" MIP	24"	1	25	25

## STANDARD 1/2" OD (3/8" ID)

### 1/2" OD (3/8" ID) 3/8" MIP x 3/8" FIP Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
111914	C-GC-123838MF-24	Gas Connector - 24" long, 1/2" OD x 3/8" ID, 3/8" MIP x 3/8" FIP	24"	1	25	25
111915	C-GC-123838MF-36	Gas Connector - 36" long, 1/2" OD x 3/8" ID, 3/8" MIP x 3/8" FIP	36"	1	25	25

### 1/2" OD (3/8" ID) 1/2" MIP x 1/2" MIP Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
120367	C-GC-121212MM-12*	Gas Connector - 12" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" MIP	12"	1	25	25
114461	C-GC-121212MM-18*	Gas Connector - 12" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" MIP	18"	1	25	25
109841	C-GC-121212MM-24	Gas Connector - 12" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" MIP	24"	1	25	25
114382	C-GC-121212MM-30*	Gas Connector - 12" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" MIP	30"	1	25	25
114350	C-GC-121212MM-36*	Gas Connector - 12" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" MIP	36"	1	25	25
111725	C-GC-121212MM-48*	Gas Connector - 12" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" MIP	48"	1	25	25

\*May require extended lead times

## STANDARD 1/2" OD (3/8" ID) CONTINUED



### Spec:

- Corrosion-resistant 304 stainless steel
- Flared-end fitting
- Indoor and outdoor use
- CSA certified for use with natural gas
- ANSI Z21.24, Z21.75/CSA 6.10, 6.27

### 1/2" OD (3/8" ID) 1/2" FIP x 1/2" FIP Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
110134	C-GC-121212FF-36	Gas Connector - 36" long, 1/2" OD x 3/8" ID, 1/2" FIP x 1/2" FIP	36"	1	25	25

### 1/2" OD (3/8" ID) 1/2" MIP x 1/2" FIP Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
112316	C-GC-121212MF-12*	Gas Connector - 12" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	12"	1	25	25
111641	C-GC-121212MF-18*	Gas Connector - 18" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	18"	1	25	25
111642	C-GC-121212MF-24*	Gas Connector - 24" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	24"	1	25	25
112897	C-GC-121212MF-30*	Gas Connector - 30" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	30"	1	25	25
111643	C-GC-121212MF-36*	Gas Connector - 36" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	36"	1	25	25
111644	C-GC-121212MF-48*	Gas Connector - 48" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	48"	1	25	25
112317	C-GC-121212MF-60	Gas Connector - 60" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	60"	1	25	25

## STANDARD 1/2" OD (3/8" ID) WITH VALVE

### 1/2" OD (3/8" ID) 1/2" FIP x 1/2" FIP Connectors With Gas Shut Off Valve

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
114432	C-GC-121212FF-18V	Gas Connector - 18" long, 1/2" OD x 3/8" ID, 1/2" FIP x 1/2" FIP	18"	1	25	25
200377	C-GC-121212FF-48V	Gas Connector - 48" long, 1/2" OD x 3/8" ID, 1/2" FIP x 1/2" FIP	48"	1	25	25

### 1/2" OD (3/8" ID) 1/2" MIP x 1/2" FIP Connectors With Gas Shut Off Valve

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
109724	C-GC-121212MF-12V	Gas Connector - 12" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	12"	1	25	25
109725	C-GC-121212MF-18V*	Gas Connector - 18" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	18"	1	25	25
109839	C-GC-121212MF-24V*	Gas Connector - 24" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	24"	1	25	25
109726	C-GC-121212MF-30V	Gas Connector - 30" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	30"	1	25	25
109840	C-GC-121212MF-36V*	Gas Connector - 36" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	36"	1	25	25
109727	C-GC-121212MF-48V	Gas Connector - 48" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	48"	1	25	25



If you do not see a size you need listed please contact our sales team. We can customize any part. Lead times may apply.

## STANDARD 5/8" OD (1/2" ID)

### 5/8" OD (1/2" ID) 1/2" MIP x 1/2" MIP Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
110025	C-GC-581212MM-12*	Gas Connector - 12" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" MIP	12"	1	25	25
109596	C-GC-581212MM-18	Gas Connector - 18" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" MIP	18"	1	25	25
109015	C-GC-581212MM-24	Gas Connector - 24" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" MIP	24"	1	25	25
109016	C-GC-581212MM-36	Gas Connector - 36" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" MIP	36"	1	25	25
109017	C-GC-581212MM-48	Gas Connector - 48" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" MIP	48"	1	25	25
109597	C-GC-581212MM-60	Gas Connector - 60" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" MIP	60"	1	25	25
114231	C-GC-581212MM-72	Gas Connector - 72" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" MIP	72"	1	25	25

### 5/8" OD (1/2" ID) 1/2" FIP x 1/2" FIP Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
114224	C-GC-581212FF-12*	Gas Connector - 12" long, 5/8" OD x 1/2" ID, 1/2" FIP x 1/2" FIP	12"	1	25	25
112481	C-GC-581212FF-18*	Gas Connector - 18" long, 5/8" OD x 1/2" ID, 1/2" FIP x 1/2" FIP	18"	1	25	25
109073	C-GC-581212FF-24	Gas Connector - 24" long, 5/8" OD x 1/2" ID, 1/2" FIP x 1/2" FIP	24"	1	25	25
109074	C-GC-581212FF-36	Gas Connector - 36" long, 5/8" OD x 1/2" ID, 1/2" FIP x 1/2" FIP	36"	1	25	25
109075	C-GC-581212FF-48	Gas Connector - 48" long, 5/8" OD x 1/2" ID, 1/2" FIP x 1/2" FIP	48"	1	25	25

\*May require extended lead times

## STANDARD 5/8" OD (1/2" ID) CONTINUED

### 5/8" OD (1/2" ID) 1/2" MIP x 1/2" FIP Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
109829	C-GC-581212MF-12	Gas Connector - 12" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	12"	1	25	25
109674	C-GC-581212MF-18	Gas Connector - 18" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	18"	1	25	25
109675	C-GC-581212MF-24	Gas Connector - 24" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	24"	1	25	25
112904	C-GC-581212MF-30	Gas Connector - 30" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	30"	1	25	25
109676	C-GC-581212MF-36	Gas Connector - 36" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	36"	1	25	25
109677	C-GC-581212MF-48	Gas Connector - 48" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	48"	1	25	25
109678	C-GC-581212MF-60	Gas Connector - 60" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	60"	1	25	25

### 5/8" OD (1/2" ID) 1/2" MIP x 3/4" MIP Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
109842	C-GC-581234MM-24	Gas Connector - 24" long, 5/8" OD x 1/2" ID, 1/2" MIP x 3/4" MIP	24"	1	25	25
109843	C-GC-581234MM-36	Gas Connector - 36" long, 5/8" OD x 1/2" ID, 1/2" MIP x 3/4" MIP	36"	1	25	25

### 5/8" OD (1/2" ID) 1/2" MIP x 3/4" FIP Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
111916	C-GC-581234MF-60	Gas Connector - 60" long, 5/8" OD x 1/2" ID, 1/2" MIP x 3/4" FIP	60"	1	25	25

### 5/8" OD (1/2" ID) 3/4" MIP x 3/4" MIP Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
120145	C-GC-583434MM-18	Gas Connector - 18" long, 5/8" OD x 1/2" ID, 3/4" MIP x 3/4" MIP	18"	1	25	25

### 5/8" OD (1/2" ID) 3/4" MIP x 3/4" FIP Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
112324	C-GC-583434MF-12	Gas Connector - 12" long, 5/8" OD x 1/2" ID, 3/4" MIP x 3/4" FIP	12"	1	25	25
112325	C-GC-583434MF-18	Gas Connector - 18" long, 5/8" OD x 1/2" ID, 3/4" MIP x 3/4" FIP	18"	1	25	25
112326	C-GC-583434MF-24	Gas Connector - 24" long, 5/8" OD x 1/2" ID, 3/4" MIP x 3/4" FIP	24"	1	25	25
112327	C-GC-583434MF-36	Gas Connector - 36" long, 5/8" OD x 1/2" ID, 3/4" MIP x 3/4" FIP	36"	1	25	25
112328	C-GC-583434MF-48	Gas Connector - 48" long, 5/8" OD x 1/2" ID, 3/4" MIP x 3/4" FIP	48"	1	25	25
112329	C-GC-583434MF-60	Gas Connector - 60" long, 5/8" OD x 1/2" ID, 3/4" MIP x 3/4" FIP	60"	1	25	25
112905	C-GC-583434MF-72	Gas Connector - 72" long, 5/8" OD x 1/2" ID, 3/4" MIP x 3/4" FIP	72"	1	25	25

## STANDARD 5/8" OD (1/2" ID) WITH VALVE

### 5/8" OD (1/2" ID) 1/2" MIP x 1/2" FIP Connectors With Gas Shut Off Valve

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
111076	C-GC-581212MF-12V*	Gas Connector - 12" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	12"	1	25	25
109013	C-GC-581212MF-18V	Gas Connector - 18" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	18"	1	25	25
109014	C-GC-581212MF-24V	Gas Connector - 24" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	24"	1	25	25
109022	C-GC-581212MF-36V	Gas Connector - 36" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	36"	1	25	25
109728	C-GC-581212MF-48V	Gas Connector - 48" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	48"	1	25	25
200138	C-GC-581212MF-60V*	Gas Connector - 60" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	60"	1	25	25

### 5/8" OD (1/2" ID) 1/2" MIP x 3/4" FIP Connectors With Gas Shut Off Valve

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
109018	C-GC-581234MF-30V	Gas Connector - 30" long, 5/8" OD x 1/2" ID, 1/2" MIP x 3/4" FIP	30"	1	25	25
109019	C-GC-581234MF-36V	Gas Connector - 36" long, 5/8" OD x 1/2" ID, 1/2" MIP x 3/4" FIP	36"	1	25	25

### 5/8" OD (1/2" ID) 3/4" MIP x 3/4" FIP Connectors With Gas Shut Off Valve

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
109729	C-GC-583434MF-18V	Gas Connector - 18" long, 5/8" OD x 1/2" ID, 3/4" MIP x 3/4" FIP	18"	1	25	25
109730	C-GC-583434MF-24V	Gas Connector - 24" long, 5/8" OD x 1/2" ID, 3/4" MIP x 3/4" FIP	24"	1	25	25
109731	C-GC-583434MF-36V	Gas Connector - 36" long, 5/8" OD x 1/2" ID, 3/4" MIP x 3/4" FIP	36"	1	25	25

\*May require extended lead times



If you do not see a size you need listed please contact our sales team. We can customize any part. Lead times may apply.



## STANDARD 1" OD (3/4" ID)

### 1" OD (3/4" ID) 3/4" MIP x 3/4" MIP Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
109828	C-GC-103434MM-18	Gas Connector - 18" long, 1" OD x 3/4" ID, 3/4" MIP x 3/4" MIP	18"	1	10	10

### 1" OD (3/4" ID) 3/4" MIP x 3/4" FIP Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
200032	C-GC-103434MF-24*	Gas Connector - 24" long, 1" OD x 3/4" ID, 3/4" MIP x 3/4" FIP	24"	1	10	10
200033	C-GC-103434MF-30*	Gas Connector - 30" long, 1" OD x 3/4" ID, 3/4" MIP x 3/4" FIP	30"	1	10	10
200034	C-GC-103434MF-36*	Gas Connector - 36" long, 1" OD x 3/4" ID, 3/4" MIP x 3/4" FIP	36"	1	10	10
200035	C-GC-103434MF-48*	Gas Connector - 48" long, 1" OD x 3/4" ID, 3/4" MIP x 3/4" FIP	48"	1	10	10

\*May require extended lead times

## YELLOW-COATED GAS CONNECTORS



Cambridge Yellow-Coated Gas Connectors are composed of the same material as our uncoated gas connectors (corrosion-resistant 304 stainless steel) but include an industry-standard yellow coating for added corrosion protection and easy gas line identification. The coating is consistent along the entire length of the connector hose, providing complete coverage and protection from chemical and/or weather-based corrosion. They are CSA certified. All other features, benefits and applications are the same as Cambridge standard gas connectors.

### Spec:

- Corrosion-resistant 304 stainless steel
- Flared-end fitting
- Indoor and outdoor use
- CSA certified for use with natural gas
- ANSI Z21.24, Z21.75/CSA 6.10, 6.27



Cambridge gas connectors transport natural gas to appliances such as stoves, dryers, and water heaters

## YELLOW-COATED 3/8" OD (1/4" ID)

### 3/8" OD (1/4" ID) 3/8" MIP x 3/8" FIP YELLOW-COATED Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
120146	C-GCY-383838MF-24	Gas Connector - 24" long, 3/8" OD x 1/4" ID, 3/8" MIP x 3/8" FIP	24"	1	25	25
200095	C-GCY-383838MF-36	Gas Connector - 36" long, 3/8" OD x 1/4" ID, 3/8" MIP x 3/8" FIP	36"	1	25	25

## YELLOW-COATED 3/8" OD (1/4" ID) WITH VALVE

### 3/8" OD (1/4" ID) 3/8" MIP x 1/2" FIP YELLOW-COATED Connectors with Valve

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
200096	C-GCY-383812MF-24V	Gas Connector - 24" long, 3/8" OD x 1/4" ID, 3/8" MIP x 1/2" FIP	24"	1	25	25
120150	C-GCY-383812MF-36V	Gas Connector - 36" long, 3/8" OD x 1/4" ID, 3/8" MIP x 1/2" FIP	36"	1	25	25

### 3/8" OD (1/4" ID) 1/2" MIP x 1/2" FIP YELLOW-COATED Connectors with Valve

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
120149	C-GCY-381212MF-60V	Gas Connector - 60" long, 3/8" OD x 1/4" ID, 1/2" MIP x 1/2" FIP	24"	1	25	25

## YELLOW-COATED 1/2" OD (3/8" ID)

### 1/2" OD (3/8" ID) 1/2" MIP x 1/2" MIP YELLOW-COATED Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
118602	C-GCY-121212MM-12	Gas Connector - 12" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" MIP	12"	1	25	25
114389	C-GCY-121212MM-18*	Gas Connector - 18" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" MIP	18"	1	25	25
114390	C-GCY-121212MM-24	Gas Connector - 24" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" MIP	24"	1	25	25
114383	C-GCY-121212MM-36*	Gas Connector - 36" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" MIP	36"	1	25	25
114384	C-GCY-121212MM-48	Gas Connector - 48" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" MIP	48"	1	25	25

### 1/2" OD (3/8" ID) 1/2" MIP x 1/2" FIP YELLOW-COATED Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
112330	C-GCY-121212MF-12	Gas Connector - 12" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	12"	1	25	25
109033	C-GCY-121212MF-18	Gas Connector - 18" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	18"	1	25	25
109034	C-GCY-121212MF-20	Gas Connector - 20" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	20"	1	25	25
109035	C-GCY-121212MF-24	Gas Connector - 24" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	24"	1	25	25
109036	C-GCY-121212MF-36	Gas Connector - 36" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	36"	1	25	25
112331	C-GCY-121212MF-48	Gas Connector - 48" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	48"	1	25	25
112332	C-GCY-121212MF-60	Gas Connector - 60" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	60"	1	25	25

\*May require extended lead times

### Spec:

- Corrosion-resistant 304 stainless steel
- Flared-end fitting
- Added corrosion protection and easy gas line identification
- Indoor and outdoor use
- CSA certified for use with natural gas
- ANSI Z21.24, Z21.75/CSA 6.10, 6.27



If you do not see a size you need listed please contact our sales team. We can customize any part. Lead times may apply.

## YELLOW-COATED 1/2" OD (3/8" ID) WITH VALVE

### 1/2" OD (3/8" ID) 1/2" MIP x 1/2" FIP YELLOW-COATED Connectors with Valve

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
200310	C-GCY-121212MF-12V	Gas Connector - 12" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	12"	1	25	25
112933	C-GCY-121212MF-18V	Gas Connector - 18" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	18"	1	25	25
111635	C-GCY-121212MF-24V	Gas Connector - 24" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	24"	1	25	25
111636	C-GCY-121212MF-36V	Gas Connector - 36" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	36"	1	25	25
200311	C-GCY-121212MF-48V	Gas Connector - 48" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	48"	1	25	25

## YELLOW-COATED 5/8" OD (1/2" ID)

### 5/8" OD (1/2" ID) 1/2" MIP x 1/2" MIP YELLOW-COATED Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
109599	C-GCY-581212MM-12	Gas Connector - 12" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" MIP	12"	1	25	25
109037	C-GCY-581212MM-18	Gas Connector - 18" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" MIP	18"	1	25	25
109038	C-GCY-581212MM-24	Gas Connector - 24" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" MIP	24"	1	25	25
109039	C-GCY-581212MM-30	Gas Connector - 30" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" MIP	30"	1	25	25
109023	C-GCY-581212MM-36	Gas Connector - 36" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" MIP	36"	1	25	25
109024	C-GCY-581212MM-48	Gas Connector - 48" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" MIP	48"	1	25	25
109040	C-GCY-581212MM-60	Gas Connector - 60" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" MIP	60"	1	25	25

### 5/8" OD (1/2" ID) 1/2" FIP x 1/2" FIP YELLOW-COATED Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
112482	C-GCY-581212FF-60	Gas Connector - 60" long, 5/8" OD x 1/2" ID, 1/2" FIP x 1/2" FIP	60"	1	25	25

### 5/8" OD (1/2" ID) 1/2" MIP x 1/2" FIP YELLOW-COATED Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
111645	C-GCY-581212MF-12*	Gas Connector - 12" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	12"	1	25	25
111639	C-GCY-581212MF-18*	Gas Connector - 18" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	18"	1	25	25
110038	C-GCY-581212MF-24*	Gas Connector - 24" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	24"	1	25	25
110039	C-GCY-581212MF-36	Gas Connector - 36" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	36"	1	25	25
110040	C-GCY-581212MF-48*	Gas Connector - 48" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	48"	1	25	25

### 5/8" OD (1/2" ID) 1/2" MIP x 3/4" MIP YELLOW-COATED Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
112483	C-GCY-581234MM-36	Gas Connector - 36" long, 5/8" OD x 1/2" ID, 1/2" MIP x 3/4" MIP	36"	1	25	25

### 5/8" OD (1/2" ID) 3/4" MIP x 3/4" MIP YELLOW-COATED Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
112487	C-GCY-583434MM-24	Gas Connector - 24" long, 5/8" OD x 1/2" ID, 3/4" MIP x 3/4" MIP	24"	1	25	25
120151	C-GCY-583434MM-36	Gas Connector - 36" long, 5/8" OD x 1/2" ID, 3/4" MIP x 3/4" MIP	36"	1	25	25
112488	C-GCY-583434MM-48	Gas Connector - 48" long, 5/8" OD x 1/2" ID, 3/4" MIP x 3/4" MIP	48"	1	25	25
120157	C-GCY-583434MM-60	Gas Connector - 60" long, 5/8" OD x 1/2" ID, 3/4" MIP x 3/4" MIP	60"	1	25	25

### 5/8" OD (1/2" ID) 3/4" FIP x 3/4" FIP YELLOW-COATED Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
112484	C-GCY-583434FF-24	Gas Connector - 24" long, 5/8" OD x 1/2" ID, 3/4" FIP x 3/4" FIP	24"	1	25	25
112485	C-GCY-583434FF-36	Gas Connector - 24" long, 5/8" OD x 1/2" ID, 3/4" FIP x 3/4" FIP	36"	1	25	25
112486	C-GCY-583434FF-48	Gas Connector - 24" long, 5/8" OD x 1/2" ID, 3/4" FIP x 3/4" FIP	48"	1	25	25

\*May require extended lead times



If you do not see a size you need listed please contact our sales team. We can customize any part. Lead times may apply.

## YELLOW-COATED 5/8" OD (1/2" ID) WITH VALVE

### 5/8" OD (1/2" ID) 1/2" MIP x 1/2" FIP YELLOW-COATED Connectors with Valve

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
110178	C-GCY-581212MF-12V	Gas Connector - 12" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	12"	1	25	25
110179	C-GCY-581212MF-18V	Gas Connector - 18" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	18"	1	25	25
109742	C-GCY-581212MF-24V	Gas Connector - 24" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	24"	1	25	25
110180	C-GCY-581212MF-30V	Gas Connector - 30" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	30"	1	25	25
109743	C-GCY-581212MF-36V	Gas Connector - 36" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	36"	1	25	25
110181	C-GCY-581212MF-48V	Gas Connector - 48" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	48"	1	25	25

### 5/8" OD (1/2" ID) 1/2" MIP x 3/4" FIP YELLOW-COATED Connectors with Valve

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
110234	C-GCY-581234MF-18V*	Gas Connector - 18" long, 5/8" OD x 1/2" ID, 1/2" MIP x 3/4" FIP	18"	1	25	25
110235	C-GCY-581234MF-24V*	Gas Connector - 24" long, 5/8" OD x 1/2" ID, 1/2" MIP x 3/4" FIP	24"	1	25	25
110236	C-GCY-581234MF-30V*	Gas Connector - 30" long, 5/8" OD x 1/2" ID, 1/2" MIP x 3/4" FIP	30"	1	25	25
110237	C-GCY-581234MF-36V*	Gas Connector - 36" long, 5/8" OD x 1/2" ID, 1/2" MIP x 3/4" FIP	36"	1	25	25

### 5/8" OD (1/2" ID) 3/4" MIP x 3/4" FIP YELLOW-COATED Connectors with Valve

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
109744	C-GCY-583434MF-24V	Gas Connector - 24" long, 5/8" OD x 1/2" ID, 3/4" MIP x 3/4" FIP	24"	1	25	25
110182	C-GCY-583434MF-36V	Gas Connector - 36" long, 5/8" OD x 1/2" ID, 3/4" MIP x 3/4" FIP	36"	1	25	25
113053	C-GCY-583434MF-48V	Gas Connector - 48" long, 5/8" OD x 1/2" ID, 3/4" MIP x 3/4" FIP	48"	1	25	25

## YELLOW-COATED 1" OD (3/4" ID)

### 1" OD (3/4" ID) 3/4" MIP x 3/4" MIP YELLOW-COATED Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
114360	C-GCY-103434MM-12*	Gas Connector - 12" long, 1" OD x 3/4" ID, 3/4" MIP x 3/4" MIP	12"	1	10	10
111952	C-GCY-103434MM-18	Gas Connector - 18" long, 1" OD x 3/4" ID, 3/4" MIP x 3/4" MIP	18"	1	10	10
113820	C-GCY-103434MM-36	Gas Connector - 36" long, 1" OD x 3/4" ID, 3/4" MIP x 3/4" MIP	36"	1	10	10

### 1" OD (3/4" ID) 3/4" FIP x 3/4" FIP YELLOW-COATED Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
120147	C-GCY-103434FF-36	Gas Connector - 36" long, 1" OD x 3/4" ID, 3/4" FIP x 3/4" FIP	36"	1	10	10

### 1" OD (3/4" ID) 3/4" MIP x 3/4" FIP YELLOW-COATED Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
120148	C-GCY-103434MF-18	Gas Connector - 18" long, 1" OD x 3/4" ID, 3/4" MIP x 3/4" FIP	18"	1	10	10
109737	C-GCY-103434MF-24	Gas Connector - 24" long, 1" OD x 3/4" ID, 3/4" MIP x 3/4" FIP	24"	1	10	10
109738	C-GCY-103434MF-36	Gas Connector - 36" long, 1" OD x 3/4" ID, 3/4" MIP x 3/4" FIP	36"	1	10	10
112379	C-GCY-103434MF-48	Gas Connector - 48" long, 1" OD x 3/4" ID, 3/4" MIP x 3/4" FIP	48"	1	10	10
112380	C-GCY-103434MF-60	Gas Connector - 60" long, 1" OD x 3/4" ID, 3/4" MIP x 3/4" FIP	60"	1	10	10

### 1" OD (3/4" ID) 3/4" MIP x 3/4" FIP YELLOW-COATED Connectors with Valve

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
111514	C-GCY-103434MF-36V*	Gas Connector - 36" long, 1" OD x 3/4" ID, 3/4" MIP x 3/4" FIP	36"	1	10	10

\*May require extended lead times

## Spec:

- Corrosion-resistant 304 stainless steel
- Flared-end fitting
- Added corrosion protection and easy gas line identification
- Indoor and outdoor use
- CSA certified for use with natural gas
- ANSI Z21.24, Z21.75/CSA 6.10, 6.27

If you do not see a size you need listed please contact our sales team. We can customize any part. Lead times may apply.






# BLACK COATED GAS CONNECTORS



Cambridge black coated gas connectors are composed of the same material as our uncoated gas connectors but include an industry-standard black coating for added corrosion protection and low visibility. This gas connector is commonly used for installation of home appliances including space heaters, fireplaces, and gas log sets. They are CSA certified.



## BLACK COATED 3/8" OD (1/4" ID)

### 3/8" OD (1/4" ID) 3/8" MIP x 3/8" FIP Black Coated Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
112906	C-GCB-383838MF-12	Gas Connector - 12" long, 3/8" OD x 1/4" ID, 3/8" MIP x 3/8" FIP	12"	1	25	25
112907	C-GCB-383838MF-18	Gas Connector - 18" long, 3/8" OD x 1/4" ID, 3/8" MIP x 3/8" FIP	18"	1	25	25
112908	C-GCB-383838MF-24	Gas Connector - 24" long, 3/8" OD x 1/4" ID, 3/8" MIP x 3/8" FIP	24"	1	25	25
112909	C-GCB-383838MF-36	Gas Connector - 36" long, 3/8" OD x 1/4" ID, 3/8" MIP x 3/8" FIP	36"	1	25	25

### 3/8" OD (1/4" ID) 3/8" MIP x 1/2" FIP Black Coated Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
112403	C-GCB-383812MF-12	Gas Connector - 12" long, 3/8" OD x 1/4" ID, 3/8" MIP x 1/2" FIP	12"	1	25	25
112404	C-GCB-383812MF-18	Gas Connector - 18" long, 3/8" OD x 1/4" ID, 3/8" MIP x 1/2" FIP	18"	1	25	25
112405	C-GCB-383812MF-24	Gas Connector - 24" long, 3/8" OD x 1/4" ID, 3/8" MIP x 1/2" FIP	24"	1	25	25
112406	C-GCB-383812MF-36	Gas Connector - 36" long, 3/8" OD x 1/4" ID, 3/8" MIP x 1/2" FIP	36"	1	25	25
112407	C-GCB-383812MF-48	Gas Connector - 48" long, 3/8" OD x 1/4" ID, 3/8" MIP x 1/2" FIP	48"	1	25	25

## BLACK COATED 1/2" OD (3/8" ID)

### 1/2" OD (3/8" ID) 3/8" MIP x 3/8" FIP Black Coated Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
111622	C-GCB-123838MF-12	Gas Connector - 12" long, 1/2" OD x 3/8" ID, 3/8" MIP x 3/8" FIP	12"	1	25	25
111623	C-GCB-123838MF-24	Gas Connector - 24" long, 1/2" OD x 3/8" ID, 3/8" MIP x 3/8" FIP	24"	1	25	25
111624	C-GCB-123838MF-36	Gas Connector - 36" long, 1/2" OD x 3/8" ID, 3/8" MIP x 3/8" FIP	36"	1	25	25

### 1/2" OD (3/8" ID) 3/8" MIP x 1/2" FIP Black Coated Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
114418	C-GCB-123812MF-12*	Gas Connector - 12" long, 1/2" OD x 3/8" ID, 3/8" MIP x 1/2" FIP	12"	1	25	25
114419	C-GCB-123812MF-24*	Gas Connector - 24" long, 1/2" OD x 3/8" ID, 3/8" MIP x 1/2" FIP	24"	1	25	25
114420	C-GCB-123812MF-36*	Gas Connector - 36" long, 1/2" OD x 3/8" ID, 3/8" MIP x 1/2" FIP	36"	1	25	25

### 1/2" OD (3/8" ID) 1/2" MIP x 1/2" MIP Black Coated Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
114385	C-GCB-121212MM-12*	Gas Connector - 12" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" MIP	12"	1	25	25
114386	C-GCB-121212MM-18	Gas Connector - 18" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" MIP	18"	1	25	25
114391	C-GCB-121212MM-24	Gas Connector - 24" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" MIP	24"	1	25	25
114392	C-GCB-121212MM-30	Gas Connector - 30" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" MIP	30"	1	25	25
114393	C-GCB-121212MM-36*	Gas Connector - 36" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" MIP	36"	1	25	25

### 1/2" OD (3/8" ID) 1/2" MIP x 1/2" FIP Black Coated Connectors

ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
111619	C-GCB-121212MF-12	Gas Connector - 12" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	12"	1	25	25
111620	C-GCB-121212MF-24	Gas Connector - 24" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	24"	1	25	25
111621	C-GCB-121212MF-36	Gas Connector - 36" long, 1/2" OD x 3/8" ID, 1/2" MIP x 1/2" FIP	36"	1	25	25

\*May require extended lead times



Cambridge Black Coated Gas Connectors are commonly used for space heaters, fireplaces and gas log sets

### Spec:

- Corrosion-resistant 304 stainless steel
- Flared-end fitting
- Added corrosion protection and low visibility
- Indoor and outdoor use
- CSA certified for use with natural gas
- ANSI Z21.24, Z21.75/CSA 6.10, 6.27



If you do not see a size you need listed please contact our sales team. We can customize any part. Lead times may apply.

## PVC (GRAY) COATED GAS CONNECTORS

Cambridge gray PVC coated gas connectors are provided with a hot-dipped heavy duty coating. This gas connector is issued for indoor and outdoor high BTU applications such as rooftop units and tankless water heaters.



ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
120152	C-GCG-103434MF-24	Gas Connector - 24" long, 1" OD x 3/4" ID, 3/4" MIP x 3/4" FIP	24"	1	10	10
120153	C-GCG-103434MF-36	Gas Connector - 36" long, 1" OD x 3/4" ID, 3/4" MIP x 3/4" FIP	36"	1	10	10



Cambridge Gray Coated Gas Connectors are commonly used for rooftop units and tankless water heaters

### Spec:

- Corrosion-resistant 304 stainless steel
- Suitable for use with radiant tube heater
- Flared-end fitting
- PVC coated
- Indoor and outdoor use
- CSA certified for use with natural gas
- ANSI Z21.24, Z21.75/CSA 6.10, 6.27

## INFRARED GAS CONNECTORS

Infrared Gas Connectors are suitable for use with a radiant tube heater, provided it is at least the length and diameter specified by the radiant tube heater instructions and is installed in strict accordance with those instructions.



ITEM#	SKU#	DESCRIPTION	LENGTH	UOM	ORDER MULTIPLE	MASTER QTY
109676	C-GC-581212MF-36	Gas Connector - 36" long, 5/8" OD x 1/2" ID, 1/2" MIP x 1/2" FIP	36"	1	25	25
200034	C-GC-103434MF-36*	Gas Connector - 36" long, 1" OD x 3/4" ID, 3/4" MIP x 3/4" FIP	36"	1	10	10

\*May require extended lead times

### Spec:

- Corrosion-resistant 304 stainless steel
- Suitable for use with radiant tube heater
- Flared-end fitting
- Indoor and outdoor use
- CSA certified for use with natural gas
- ANSI Z21.24, Z21.75/CSA 6.10, 6.27

## GAS CONNECTOR KITS

ITEM# 200047 UOM: 1 ORDER MULTIPLE: 10 MASTER QTY: 10  
 (1) 5/8" OD x 1/2" MIP x 1/2" MIP x 12" Gas Connector  
 (1) 1/2" FIP x 1/2" FIP Gas Shut-Off Valve



ITEM# 200046 UOM: 1 ORDER MULTIPLE: 10 MASTER QTY: 10  
 (1) 5/8" OD x 1/2" MIP x 1/2" MIP x 18" Gas Connector  
 (1) 1/2" FIP x 1/2" FIP Gas Shut-Off Valve

ITEM# 200044 UOM: 1 ORDER MULTIPLE: 10 MASTER QTY: 10  
 (1) 5/8" OD x 1/2" MIP x 1/2" MIP x 36" Gas Connector  
 (1) 1/2" FIP x 1/2" FIP Gas Shut-Off Valve

ITEM# 200045 UOM: 1 ORDER MULTIPLE: 10 MASTER QTY: 10  
 (1) 5/8" OD x 1/2" MIP x 1/2" MIP x 24" Gas Connector  
 (1) 1/2" FIP x 1/2" FIP Gas Shut-Off Valve

ITEM# 200043 UOM: 1 ORDER MULTIPLE: 10 MASTER QTY: 10  
 (1) 5/8" OD x 1/2" MIP x 3/4" MIP x 36" Gas Connector  
 (1) 3/4" FIP x 3/4" FIP Gas Shut-Off Valve

### Spec:

- Corrosion-resistant 304 stainless steel
- Flared-end fitting
- Indoor and outdoor use
- CSA certified for use with natural gas
- ANSI Z21.24, Z21.75/CSA 6.10, 6.27

## GAS CONNECTOR DISPLAY (GAS CONNECTORS NOT INCLUDED)

Cambridge offers a heavy duty display for your gas connector merchandising purposes. Convenient hooks for releasing the gas connector from the display come in four different sizes to accommodate various O.D. lengths. The hooks accommodate the display, slatwall, and pegboard.

ITEM# 200279 UOM: 1  
 ORDER MULTIPLE: 1  
 MASTER QTY: 1

Gas connector display.  
 Display includes 5 hooks of each size.  
 Additional hooks may be ordered separately.



Organize your gas connectors by size, color or style easily with this user-friendly accommodation



## GAS CONNECTOR DISPLAY HOOKS

ITEM# 200087 UOM: 1  
 Fits 3/8" OD (1/4" ID)  
 ORDER MULTIPLE: 5  
 MASTER QTY: 250

ITEM# 200088 UOM: 1  
 Fits 1/2" OD (3/8" ID)  
 ORDER MULTIPLE: 5  
 MASTER QTY: 250

ITEM# 200089 UOM: 1  
 Fits 5/8" OD (1/2" ID)  
 ORDER MULTIPLE: 5  
 MASTER QTY: 250

ITEM# 200090 UOM: 1  
 Fits 1" OD (3/4" ID)  
 ORDER MULTIPLE: 5  
 MASTER QTY: 250



## GAS VALVES

Cambridge gas connector valves are constructed for durable, long-lasting usage and performance and are tested to be 100% leak resistant. Cambridge gas connector valves are CSA design certified, ergonomically designed for ease-of-use, and easy to install.

### FLARED/THREADED

#### Spec:

- CSA certified
- UL 842
- ANSI Z21.15/CSA 9.1

ITEM#	SKU#	DESCRIPTION	UOM	ORDER MULTIPLE	MASTER QTY
109011	C-GC-1212FF-V	1/2" FIP x 1/2" FIP	1	10	100
109012	C-GC-3434FF-V	3/4" FIP x 3/4" FIP	1	10	100
109844	FIBV02	3/8" OD Flare x 1/2" FIP	1	10	100
109845	FIBV03	1/2" OD Flare x 1/2" FIP	1	10	100
110293	FIBV05*	5/8" OD Flare x 1/2" FIP	1	10	100
110294	FIBV08*	5/8" OD Flare x 3/4" FIP	1	10	100

\*May require extended lead times



FIP x FIP



Flare x FIP



### BALL - ONE PIECE CONSTRUCTION

Cambridge gas ball valves are built from forged brass as a one-piece body. This creates leak resistance, increases valve life and adds to the quality flow control.

#### Spec:

- 1-piece body
- For use in above-ground piping systems up to 5 PSI
- CSA certified
- UL 842
- ANSI Z21.15 b/ CSA 9.1

ITEM#	DESCRIPTION	UOM	ORDER MULTIPLE	MASTER QTY
200366	1/2" FIP x 1/2" FIP	1	20	20
200421	3/4" FIP x 3/4" FIP	1	10	10
200439	3/8" Flare x 3/8" Flare	1	6	6



FIP x FIP



Flare x Flare



### THREADED BALL

Cambridge threaded ball valves are ideal for connecting pipes with a threaded connection. Easy to install, they create air-tight, leak-proof seals to control the flow of fluids through small pipes.

#### Spec:

- Full port
- Lead-free
- 600 WOG
- CSA certified for natural gas .5g, 5g, 125g
- UL 842

ITEM#	SKU#	DESCRIPTION	UOM	ORDER MULTIPLE	MASTER QTY
113941	0222262-R	3/8" FIP Ball Valve	1	10	100
113299	0222263-R	1/2" FIP Ball Valve	1	10	100
113300	0222264-R	3/4" FIP Ball Valve	1	10	80
113301	0222265-R	1" FIP Ball Valve	1	48	48
113302	0222266-R	1-1/4" FIP Ball Valve	1	36	36
113303	0222267-R	1-1/2" FIP Ball Valve	1	24	24
113304	0222268-R	2" FIP Ball Valve	1	12	12



### DIELECTRIC GAS UNION

Cambridge dielectric unions are made from forged carbon steel. They create a non-conductive barrier between different metals, which prevents electrolysis corrosion from occurring.

#### Spec:

- Carbon steel

ITEM#	COLOR	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
200357	Black	3/4" FNPT x 3/4" FNPT	1	10	100



## BRASS FLARE FITTINGS

Cambridge brass flare fittings come in different sizes in order to provide the correct gas tight fit.

### SHORT FORGED FLARE NUTS



#### Spec:

- SAE J513
- Forged
- Short type
- Brass

ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
200347	1/4"	1	10	500
200348	3/8"	1	10	500
200349	1/2"	1	10	500
200350	5/8"	1	10	500

### SHORT FLARED ROD NUT




#### Spec:

- SAE J513
- Short type
- Brass

ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
200626	3/8"	1	10	500

### FLARE ELBOWS



O.D. X MIP    O.D. X O.D.

#### Spec:

- SAE J513
- Brass

ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
200548	1/2" O.D. x 1/2" MIP	1	10	300
200549	1/2" O.D. x 1/2" O.D.	1	10	250
200550	3/8" O.D. x 1/2" MIP	1	10	300

### FLARE UNIONS



#### Spec:

- SAE J513
- Brass

ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
200547	1/2" O.D. x 1/2" O.D.	1	10	300

### FORGED SWIVEL FLARE CONNECTOR



#### Spec:

- SAE J513
- Forged
- Brass

ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
200625	1/4"	1	10	250

## STEEL FLARE FITTINGS

### FLARE x MIP UNIONS

#### Spec:

- SAE J513
- Steel



ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
114592	GCF-3838M	3/8" ID Flare x 3/8" MIP	1	10	100
110289	GCF-1212M	1/2" OD Flare x 1/2" MIP	1	10	10
109952	GCF-5812M	5/8" OD Flare x 1/2" MIP	1	10	100
109953	GCF-5834M	5/8" OD Flare x 3/4" MIP	1	10	100
113819	GCF-3434M	3/4" OD Flare x 3/4" MIP	1	10	10
118717	GCF-1034M	1" OD Flare x 3/4" MIP	1	10	10

### FLARE x FIP UNIONS

#### Spec:

- SAE J513
- Steel



ITEM#	ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
116115	GCF-3838F	3/8" ID Flare x 3/8" FIP	1	10	100
110288	GCF-1212F	1/2" OD Flare x 1/2" FIP	1	10	100
109764	GCF-5812F	5/8" OD Flare x 1/2" FIP	1	10	100
118718	GCF-1034F	1" OD Flare x 3/4" FIP	1	10	10

## GAS TEST GAUGES

### BELL

ITEM#	NPT SIZE	DIAL SIZE	PSI	UOM	ORDER MULTIPLE	MASTER QTY
200369	1/2"	2"	0-15	1	20	20
200371	3/4"	2"	0-15	1	20	20
200372	1/2"	2"	0-30	1	20	20
200373	3/4"	2"	0-30	1	20	20



### HORIZONTAL

ITEM#	NPT SIZE	DIAL SIZE	PSI	UOM	ORDER MULTIPLE	MASTER QTY
200368	1/2"	2"	0-15	1	20	20
200370	3/4"	2"	0-15	1	20	20
200396	3/4"	2"	0-30	1	20	20



### TRIDICATOR BOILER GAUGE

ITEM#	NPT SIZE	DIAL SIZE	PSI	TEMPERATURE	UOM	ORDER MULTIPLE	MASTER QTY
200420	1/4"	2.75"	0-70	60°F - 320°F	1	20	20



## CONCENTRIC VENT KIT

### Spec:

- Intake/vent size 2"
- Overall assembled length 34.75"
- Intake pipe outside diameter 3.5"
- Air inlet pipe length 19.5"



Allows for one hole cut, instead of two



Cambridge concentric vent kits can be used with all condensing gas furnace models. They simplify the installation of high efficiency furnaces by allowing both the exhaust vent and the intake of combustion air to pass through a standard roof or sidewall.

ITEM# 200576 UOM: 1 ORDER MULTIPLE: 1 MASTER QTY: 1  
Includes ones of each: Combustion air inlet cap, Air inlet pipe, Vent pipe, Intake/vent concentric "Y"

## BLACK MALLEABLE IRON PIPE FITTINGS - CLASS 150

STZ black malleable iron pipe fittings are durable and easy to install. We offer a wide range of fitting types and sizes, so HVAC techs can use the fitting best suited for the job in gas, air, and low pressure applications. All our malleable iron pipe fittings are 100% pressure tested at the factory.

\*Not for use with drinking water

\*Always check your local plumbing and gas codes before starting any piping projects

### 90° ELBOWS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501439	310E90-18	1/8"	1	10	10
501438	310E90-14	1/4"	1	10	10
501441	310E90-38	3/8"	1	5	5
502056	312E90-12	1/2"	1	25	25
523969	312E90-12-2	1/2"	Bag of 2	10	10
502057	312E90-12/10	1/2"	Bag of 10	5	30
502058	312E90-34	3/4"	1	25	25
523970	312E90-34-2	3/4"	Bag of 2	10	10
502059	312E90-34/10	3/4"	Bag of 10	5	15
501435	310E90-1	1"	1	10	10
501437	310E90-114	1-1/4"	1	5	5

ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501436	310E90-112	1-1/2"	1	5	5
501440	310E90-2	2"	1	4	4
502510	350E90-212	2-1/2"	1	1	16
502511	350E90-3	3"	1	1	8
502512	350E90-4	4"	1	1	4

### BULK OPTIONS

505826	FMBE90-14	1/4"	1	35	420
505832	FMBE90-38	3/8"	1	90	360
505825	FMBE90-12	1/2"	1	50	200
505831	FMBE90-34	3/4"	1	35	105
505822	FMBE90-1	1"	1	20	60
505824	FMBE90-114	1-1/4"	1	20	40
505823	FMBE90-112	1-1/2"	1	15	30
505828	FMBE90-2	2"	1	8	16

# BLACK MALLEABLE IRON PIPE FITTINGS - CLASS 150 CONTINUED

## 90° STREET ELBOWS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501547	310SE90-18	1/8"	1	10	10
501546	310SE90-14	1/4"	1	10	10
501550	310SE90-38	3/8"	1	5	5
501545	310SE90-12	1/2"	1	15	15
501549	310SE90-34	3/4"	1	15	15
501542	310SE90-1	1"	1	5	5
501544	310SE90-114	1-1/4"	1	5	5
501543	310SE90-112	1-1/2"	1	5	5
501548	310SE90-2	2"	1	4	4
502523	350 SE90-3	3"	1	1	8
502524	350 SE90-4	4"	1	1	4

### BULK OPTIONS

506266	FMBSE90-14	1/4"	1	35	420
506272	FMBSE90-38	3/8"	1	60	240
506265	FMBSE90-12	1/2"	1	60	180
506271	FMBSE90-34	3/4"	1	35	105
506262	FMBSE90-1	1"	1	45	90
506264	FMBSE90-114	1-1/4"	1	25	50
506263	FMBSE90-112	1-1/2"	1	9	27
506268	FMBSE90-2	2"	1	8	16

## 45° ELBOWS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501431	310E45-14	1/4"	1	10	10
501434	310E45-38	3/8"	1	10	10
501430	310E45-12	1/2"	1	10	10
501433	310E45-34	3/4"	1	10	10
501427	310E45-1	1"	1	5	5
501429	310E45-114	1-1/4"	1	5	5
501428	310E45-112	1-1/2"	1	5	5
501432	310E45-2	2"	1	4	4
502507	350E45-212	2-1/2"	1	1	16

### BULK OPTIONS

505820	FMBE45-38	3/8"	1	75	300
505814	FMBE45-12	1/2"	1	50	200
505819	FMBE45-34	3/4"	1	40	120
505811	FMBE45-1	1"	1	20	60
505813	FMBE45-114	1-1/4"	1	20	40
505812	FMBE45-112	1-1/2"	1	10	30
505816	FMBE45-2	2"	1	12	24

## 90° REDUCING ELBOWS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501491	310RE-1214	1/2" x 1/4"	1	25	25
501492	310RE-1238	1/2" x 3/8"	1	10	10
501497	310RE-3438	3/4" x 3/8"	1	25	25
501496	310RE-3412	3/4" x 1/2"	1	10	10
501486	310RE-112	1" x 1/2"	1	10	10
501493	310RE-134	1" x 3/4"	1	5	5
501490	310RE-11434	1-1/4" x 3/4"	1	5	5
501489	310RE-1141	1-1/4" x 1"	1	5	5
501487	310RE-1121	1-1/2" x 1"	1	5	5
501488	310RE-112114	1-1/2" x 1-1/4"	1	5	5
501494	310RE-21	2" x 1"	1	5	5
501495	310RE-2112	2" x 1-1/2"	1	5	5

### BULK OPTIONS

506210	FMBRE-3412	3/4" x 1/2"	1	40	160
506200	FMBRE-112	1" x 1/2"	1	25	100
506207	FMBRE-134	1" x 3/4"	1	50	100
506204	FMBRE-11434	1-1/4" x 3/4"	1	15	60
506203	FMBRE-1141	1-1/4" x 1"	1	10	40

## 45° STREET ELBOWS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501538	310SE45-18	1/8"	1	10	10
501537	310SE45-14	1/4"	1	10	10
501541	310SE45-38	3/8"	1	10	10
501536	310SE45-12	1/2"	1	5	5
501540	310SE45-34	3/4"	1	5	5
501533	310SE45-1	1"	1	5	5
501535	310SE45-114	1-1/4"	1	5	5
501534	310SE45-112	1-1/2"	1	5	5
501539	310SE45-2	2"	1	5	5

### BULK OPTIONS

506256	FMB SE45-12	1/2"	1	75	225
506260	FMB SE45-34	3/4"	1	40	120
506253	FMB SE45-1	1"	1	25	75
506254	FMB SE45-112	1-1/2"	1	10	30
506259	FMB SE45-2	2"	1	12	24



## SIDE OUTLET ELBOWS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501552	310SOE-38	3/8"	1	10	10
501551	310SOE-12	1/2"	1	6	6

### BULK OPTIONS

116944	FMBSOE-38	3/8"	1	20	20
517302	FMBSOE-12	1/2"	1	45	135
517303	FMBSOE-34	3/4"	1	20	80
116125	FMBSOE-1	1"	1	20	40

## COUPLINGS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501419	310CO-18	1/8"	1	10	10
501418	310CO-14	1/4"	1	10	10
501421	310CO-38	3/8"	1	10	10
502052	312CO-12	1/2"	1	25	25
502053	312CO-12/10	1/2"	Bag of 10	5	30
502054	312CO-34	3/4"	1	25	25
502055	312CO-34/10	3/4"	Bag of 10	5	20
501415	310CO-1	1"	1	10	10
501417	310CO-114	1-1/4"	1	5	5
501416	310CO-112	1-1/2"	1	5	5
501420	310CO-2	2"	1	4	4
502504	350CO-212	2-1/2"	1	1	24
502505	350CO-3	3"	1	1	16

### BULK OPTIONS

505805	FMBCO-38	3/8"	1	40	480
505798	FMBCO-12	1/2"	1	60	240
505804	FMBCO-34	3/4"	1	50	150
505795	FMBCO-1	1"	1	25	100
505797	FMBCO-114	1-1/4"	1	16	64
505796	FMBCO-112	1-1/2"	1	18	36
505801	FMBCO-2	2"	1	12	24

## REDUCING COUPLINGS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501474	310RC-1418	1/4" x 1/8"	1	10	10
501485	310RC-3818	3/8" x 1/8"	1	10	10
501484	310RC-3814	3/8" x 1/4"	1	10	10
501471	310RC-1218	1/2" x 1/8"	1	25	25
501470	310RC-1214	1/2" x 1/4"	1	25	25
501472	310RC-1238	1/2" x 3/8"	1	15	15
501481	310RC-3414	3/4" x 1/4"	1	25	25
501483	310RC-3438	3/4" x 3/8"	1	25	25
501480	310RC-3412	3/4" x 1/2"	1	15	15
501462	310RC-112	1" x 1/2"	1	5	5
501473	310RC-134	1" x 3/4"	1	10	10
501468	310RC-11412	1-1/4" x 1/2"	1	5	5
501469	310RC-11434	1-1/4" x 3/4"	1	5	5
501467	310RC-1141	1-1/4" x 1"	1	5	5
501465	310RC-11212	1-1/2" x 1/2"	1	5	5
501466	310RC-11234	1-1/2" x 3/4"	1	5	5
501463	310RC-1121	1-1/2" x 1"	1	5	5
501464	310RC-112114	1-1/2" x 1-1/4"	1	5	5
501478	310RC-212	2" x 1/2"	1	5	5
501479	310RC-234	2" x 3/4"	1	5	5
501475	310RC-21	2" x 1"	1	5	5
501477	310RC-2114	2" x 1-1/4"	1	5	5
501476	310RC-2112	2" x 1-1/2"	1	5	5
502517	350RC-2122	2-1/2" x 2"	1	1	24
502518	350RC-32	3" x 2"	1	1	16
502519	350RC-3212	3" x 2-1/2"	1	1	16
502520	350RC-43	4" x 3"	1	1	8

### BULK OPTIONS

506180	FMBRC-1218	1/2" x 1/8"	1	75	300
506179	FMBRC-1214	1/2" x 1/4"	1	75	300
506181	FMBRC-1238	1/2" x 3/8"	1	60	240
506196	FMBRC-3438	3/4" x 3/8"	1	45	180
506193	FMBRC-3412	3/4" x 1/2"	1	60	180
506175	FMBRC-114	1" x 1/4"	1	45	135
506170	FMBRC-112	1" x 1/2"	1	30	120
506182	FMBRC-134	1" x 3/4"	1	25	100
506177	FMBRC-11412	1-1/4" x 1/2"	1	25	75
506178	FMBRC-11434	1-1/4" x 3/4"	1	25	75
506176	FMBRC-1141	1-1/4" x 1"	1	15	60
506174	FMBRC-11234	1-1/2" x 3/4"	1	15	60
506171	FMBRC-1121	1-1/2" x 1"	1	25	50
506172	FMBRC-112114	1-1/2" x 1-1/4"	1	12	48
506190	FMBRC-234	2" x 3/4"	1	12	36
506184	FMBRC-21	2" x 1"	1	12	36
506185	FMBRC-2112	2" x 1-1/2"	1	9	27

# BLACK MALLEABLE IRON PIPE FITTINGS - CLASS 150 CONTINUED

## BUSHINGS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501394	310B-1418	1/4" x 1/8"	1	10	10
501405	310B-3818	3/8" x 1/8"	1	10	10
501404	310B-3814	3/8" x 1/4"	1	10	10
501390	310B-1218	1/2" x 1/8"	1	25	25
501389	310B-1214	1/2" x 1/4"	1	10	10
501391	310B-1238	1/2" x 3/8"	1	15	15
501402	310B-3418	3/4" x 1/8"	1	25	25
501401	310B-3414	3/4" x 1/4"	1	25	25
501403	310B-3438	3/4" x 3/8"	1	25	25
501400	310B-3412	3/4" x 1/2"	1	15	15
501385	310B-114	1" x 1/4"	1	10	10
501393	310B-138	1" x 3/8"	1	10	10
501380	310B-112	1" x 1/2"	1	10	10
501392	310B-134	1" x 3/4"	1	10	10
501387	310B-11412	1-1/4" x 1/2"	1	5	5
501388	310B-11434	1-1/4" x 3/4"	1	5	5
501386	310B-1141	1-1/4" x 1"	1	5	5
501383	310B-11212	1-1/2" x 1/2"	1	5	5
501384	310B-11234	1-1/2" x 3/4"	1	5	5
501381	310B-1121	1-1/2" x 1"	1	5	5
501382	310B-112114	1-1/2" x 1-1/4"	1	5	5
501398	310B-212	2" x 1/2"	1	5	5
501399	310B-234	2" x 3/4"	1	5	5
501395	310B-21	2" x 1"	1	5	5
501397	310B-2114	2" x 1-1/4"	1	5	5
501396	310B-2112	2" x 1-1/2"	1	3	3
502494	350B-21234	2-1/2" x 3/4"	1	1	8
511653	350B-212114	2-1/2" x 1-1/4"	1	1	8
502492	350B-212112	2-1/2" x 1-1/2"	1	1	8
502493	350B-2122	2-1/2" x 2"	1	1	8
502495	350B-3112	3" x 1-1/2"	1	1	8
502496	350B-32	3" x 2"	1	1	8
502497	350B-3212	3" x 2-1/2"	1	1	8
502499	350B-42	4" x 2"	1	1	8
502500	350B-43	4" x 3"	1	1	8

### BULK OPTIONS

ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
505746	FMBB-3814	3/8" x 1/4"	1	75	900
505724	FMBB-1218	1/2" x 1/8"	1	150	600
505723	FMBB-1214	1/2" x 1/4"	1	150	600
505725	FMBB-1238	1/2" x 3/8"	1	150	600
505744	FMBB-3418	3/4" x 1/8"	1	75	300
505743	FMBB-3414	3/4" x 1/4"	1	75	300
505742	FMBB-3412	3/4" x 1/2"	1	75	300
505714	FMBB-112	1" x 1/2"	1	50	200
505726	FMBB-134	1" x 3/4"	1	50	200
505722	FMBB-11434	1-1/4" x 3/4"	1	30	120
505720	FMBB-1141	1-1/4" x 1"	1	30	120
505717	FMBB-11212	1-1/2" x 1/2"	1	25	75
505718	FMBB-11234	1-1/2" x 3/4"	1	25	75
505715	FMBB-1121	1-1/2" x 1"	1	25	75
505716	FMBB-112114	1-1/2" x 1-1/4"	1	25	75
505732	FMBB-212	2" x 1/2"	1	20	60
505729	FMBB-21	2" x 1"	1	20	60
505730	FMBB-2112	2" x 1-1/2"	1	20	60
505731	FMBB-2114	2" x 1-1/4"	1	20	60

## TEES

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501559	310T-18	1/8"	1	10	10
501558	310T-14	1/4"	1	10	10
501561	310T-38	3/8"	1	5	5
502060	312T-12	1/2"	1	25	25
502061	312T-34	3/4"	1	15	15
502062	312T-34/10	3/4"	Bag of 10	5	15
501555	310T-1	1"	1	5	5
501557	310T-114	1-1/4"	1	5	5
501556	310T-112	1-1/2"	1	3	3
501560	310T-2	2"	1	4	4
502525	350T-212	2-1/2"	1	1	12
502526	350T-3	3"	1	1	8
502527	350T-4	4"	1	1	4

### BULK OPTIONS

506278	FMBT-14	1/4"	1	75	300
506284	FMBT-38	3/8"	1	45	180
506277	FMBT-12	1/2"	1	40	120
506283	FMBT-34	3/4"	1	35	70
506274	FMBT-1	1"	1	20	40
506276	FMBT-114	1-1/4"	1	14	28
506275	FMBT-112	1-1/2"	1	12	24
506280	FMBT-2	2"	1	8	16

## REDUCING TEES

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501515	310RT-121238	1/2" x 1/2" x 3/8"	1	25	25
501514	310RT-121234	1/2" x 1/2" x 3/4"	1	3	3
501528	310RT-341212	3/4" x 1/2" x 1/2"	1	10	10
501529	310RT-341234	3/4" x 1/2" x 3/4"	1	10	10
501532	310RT-343438	3/4" x 3/4" x 3/8"	1	10	10
501531	310RT-343412	3/4" x 3/4" x 1/2"	1	10	10
501506	310RT-11234	1" x 1/2" x 3/4"	1	10	10
501499	310RT-1121	1" x 1/2" x 1"	1	10	10
501517	310RT-13412	1" x 3/4" x 1/2"	1	10	10
501518	310RT-13434	1" x 3/4" x 3/4"	1	5	5
501516	310RT-1341	1" x 3/4" x 1"	1	10	10
501498	310RT-1112	1" x 1" x 1/2"	1	5	5
501508	310RT-1134	1" x 1" x 3/4"	1	5	5
501509	310RT-11411	1-1/4" x 1" x 1"	1	5	5
501511	310RT-11411412	1-1/4" x 1-1/4" x 1/2"	1	5	5
501512	310RT-11411434	1-1/4" x 1-1/4" x 3/4"	1	5	5

## REDUCING TEES CONTINUED

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501510	310RT-1141141	1-1/4" x 1-1/4" x 1"	1	5	5
501502	310RT-11211212	1-1/2" x 1-1/2" x 1/2"	1	5	5
501503	310RT-11211234	1-1/2" x 1-1/2" x 3/4"	1	5	5
501500	310RT-1121121	1-1/2" x 1-1/2" x 1"	1	5	5
501501	310RT-112112114	1-1/2" x 1-1/2" x 1-1/4"	1	5	5
501521	310RT-21122	2" x 1-1/2" x 2"	1	4	4
501526	310RT-2212	2" x 2" x 1/2"	1	5	5
501527	310RT-2234	2" x 2" x 3/4"	1	5	5
501523	310RT-221	2" x 2" x 1"	1	4	4
501525	310RT-22114	2" x 2" x 1-1/4"	1	4	4
501524	310RT-22112	2" x 2" x 1-1/2"	1	4	4
502521	350RT-212212112	2-1/2" x 2-1/2" x 1-1/2"	1	1	12

### BULK OPTIONS

506233	FMBRT-121238	1/2" x 1/2" x 3/8"	1	40	160
506232	FMBRT-121234	1/2" x 1/2" x 3/4"	1	30	120
506247	FMBRT-341212	3/4" x 1/2" x 1/2"	1	25	100
506248	FMBRT-341234	3/4" x 1/2" x 3/4"	1	20	80
506250	FMBRT-343412	3/4" x 3/4" x 1/2"	1	20	80
506222	FMBRT-11234	1" x 1/2" x 3/4"	1	20	80
506215	FMBRT-1121	1" x 1/2" x 1"	1	15	60
506236	FMBRT-13434	1" x 3/4" x 3/4"	1	15	60
506234	FMBRT-1341	1" x 3/4" x 1"	1	15	60
506214	FMBRT-1112	1" x 1" x 1/2"	1	15	60
506224	FMBRT-1134	1" x 1" x 3/4"	1	12	48
506227	FMBRT-11411412	1-1/4" x 1-1/4" x 1/2"	1	20	40
506226	FMBRT-1141141	1-1/4" x 1-1/4" x 1"	1	20	40
506245	FMBRT-2234	2" x 2" x 3/4"	1	10	20
506243	FMBRT-22114	2" x 2" x 1-1/4"	1	8	16

## SIDE OUTLET TEES

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501554	310SOT-38	3/8"	1	10	10
501553	310SOT-12	1/2"	1	6	6

### BULK OPTIONS

517304	FMBSOT-12	1/2"	1	25	100
116779	FMBSOT-34	3/4"	1	15	60
116778	FMBSOT-1	1"	1	20	40

## EXTENSION PIECES

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501442	310EP-1	1"	1	10	10

## UNIONS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501566	310U-14	1/4"	1	10	10
501570	310U-38	3/8"	1	5	5
501565	310U-12	1/2"	1	15	15
501569	310U-34	3/4"	1	15	15
501562	310U-1	1"	1	5	5
501564	310U-114	1-1/4"	1	5	5
501563	310U-112	1-1/2"	1	4	4
501568	310U-2	2"	1	3	3
502529	350U-3	3"	1	1	8

### BULK OPTIONS

506295	FMBU-38	3/8"	1	40	160
506289	FMBU-12	1/2"	1	15	100
506294	FMBU-34	3/4"	1	35	70
506286	FMBU-1	1"	1	20	40
506288	FMBU-114	1-1/4"	1	30	30
506287	FMBU-112	1-1/2"	1	10	20
506291	FMBU-2	2"	1	6	12

## CROSSES

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501426	310CR-38	3/8"	1	10	10
501423	310CR-12	1/2"	1	10	10
501425	310CR-34	3/4"	1	10	10
501422	310CR-1	1"	1	10	10
501424	310CR-2	2"	1	4	4

### BULK OPTIONS

516771	FMBCR-38	3/8"	1	50	150
505808	FMBCR-12	1/2"	1	30	90
505810	FMBCR-34	3/4"	1	20	60
505807	FMBCR-1	1"	1	15	30

## PLUGS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501458	310P-18	1/8"	1	10	10
501457	310P-14	1/4"	1	10	10
501461	310P-38	3/8"	1	10	10
501456	310P-12	1/2"	1	25	25
501460	310P-34	3/4"	1	20	20
501453	310P-1	1"	1	10	10
501455	310P-114	1-1/4"	1	5	5
501454	310P-112	1-1/2"	1	4	4
501459	310P-2	2"	1	5	5
502513	350 P-212	2-1/2"	1	12	12
502514	350 P-3	3"	1	9	9
502515	350 P-4	4"	1	6	6

### BULK OPTIONS

506168	FMBP-38	3/8"	1	120	1440
506161	FMBP-12	1/2"	1	50	600
506167	FMBP-34	3/4"	1	30	360
506158	FMBP-1	1"	1	20	240
506160	FMBP-114	1-1/4"	1	40	120
506159	FMBP-112	1-1/2"	1	30	90
506164	FMBP-2	2"	1	20	60

## CAPS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501411	310CA-18	1/8"	1	10	10
501410	310CA-14	1/4"	1	10	10
501414	310CA-38	3/8"	1	10	10
501409	310CA-12	1/2"	1	25	25
523869	310CA-12-10	1/2"	Bag of 10	8	8
501413	310CA-34	3/4"	1	25	25
501406	310CA-1	1"	1	10	10
501408	310CA-114	1-1/4"	1	5	5
501407	310CA-112	1-1/2"	1	5	5
501412	310CA-2	2"	1	5	5
502501	350CA-212	2-1/2"	1	1	6
502502	350CA-3	3"	1	1	6
502503	350CA-4	4"	1	1	16

### BULK OPTIONS

505793	FMBCA-38	3/8"	1	60	720
505786	FMBCA-12	1/2"	1	75	300
505792	FMBCA-34	3/4"	1	40	160
505783	FMBCA-1	1"	1	25	100
505785	FMBCA-114	1-1/4"	1	20	80
505784	FMBCA-112	1-1/2"	1	18	54
505789	FMBCA-2	2"	1	12	36

## FLANGES

### Spec:

- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501451	310F-38	3/8"	1	10	10
501452	310F-38-2	3/8"	Bag of 2	10	10
501446	310F-12	1/2"	1	18	18
501447	310F-12-2	1/2"	Bag of 2	10	10
523865	310F-12-6	1/2"	Bag of 6	4	4
501449	310F-34	3/4"	1	18	18
501450	310F-34-2	3/4"	Bag of 2	10	10
523866	310F-34-6	3/4"	Bag of 6	4	4
501443	310F-1	1"	1	10	10
523863	310F-1-6	1"	Bag of 6	4	4
501445	310F-114	1-1/4"	1	5	5
501444	310F-112	1-1/2"	1	5	5
501448	310F-2	2"	1	4	4

### BULK OPTIONS

506157	FMBF-38	3/8"	1	25	200
516852	FMBF-12	1/2"	1	25	150
506156	FMBF-34	3/4"	1	15	120
506152	FMBF-1	1"	1	15	90
506154	FMBF-114	1-1/4"	1	10	80
506153	FMBF-112	1-1/2"	1	8	32
506155	FMBF-2	2"	1	8	32

## CLOTH TOWELS

ITEM#	SKU#	DESCRIPTION	UOM	ORDER MULTIPLE	MASTER QTY
106546	T-BST	Blue - surgical	5 lb Box	1	1



Cambridge reusable cloth towels are excellent for cleaning up debris, and are highly absorbent for soaking up liquids.

## BLACK STEEL NIPPLES - SCHEDULE 40

STZ nipples are composed of durable, schedule 40 black steel. They are hydrostatically tested and available in sizes to fit residential and light commercial gas and air applications.

\*Not for use with drinking water


\*Always check your local plumbing and gas codes before starting any piping projects



### BLACK NIPPLES Ø Sizing Chart

To scale

Size	O.D.
4"	4.50"
3"	3.50"
2-1/2"	2.875"
2"	2.375"
1-1/2"	1.90"
1-1/4"	1.66"
1"	1.315"
3/4"	1.05"
1/2"	.84"
3/8"	.675"
1/4"	.54"
1/8"	.405"

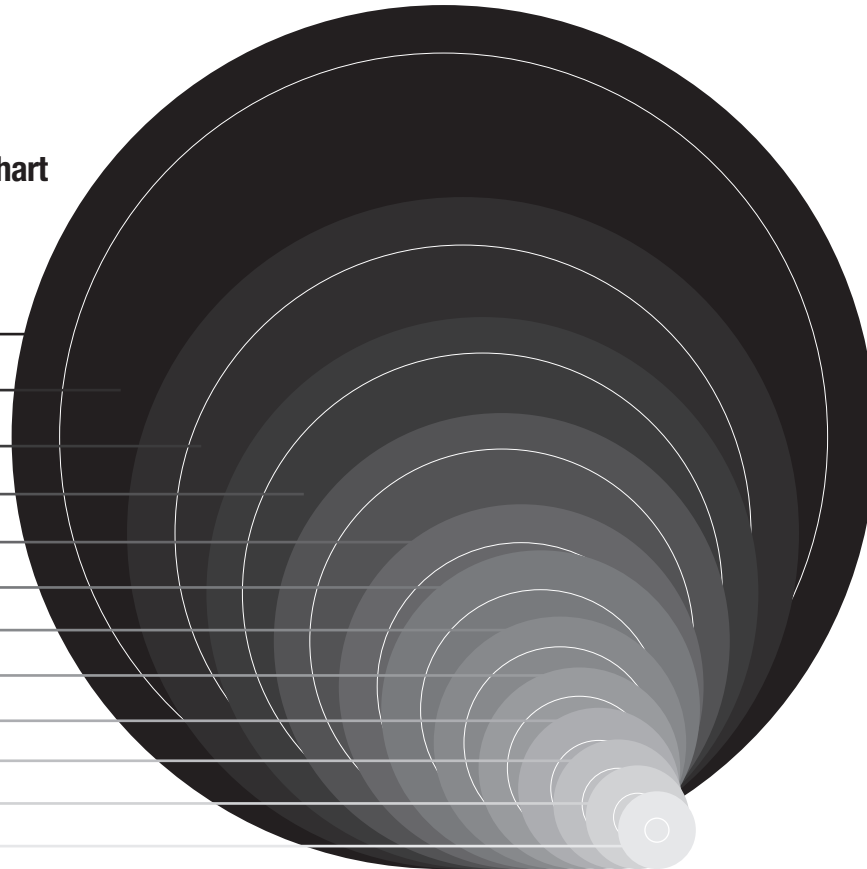

## BLACK STEEL NIPPLES - SCHEDULE 40

### Spec:

- Hydrostatically tested
- Steel construction
- Made to ASTM A733 specifications



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
<b>1/8"</b>					
501294	30818XCL	1/8" x Close	1	10	10
501283	30818X112	1/8" x 1-1/2"	1	10	10
501285	30818X2	1/8" x 2"	1	10	10
501286	30818X212	1/8" x 2-1/2"	1	10	10
501287	30818X3	1/8" x 3"	1	10	10
501288	30818X312	1/8" x 3-1/2"	1	10	10
501289	30818X4	1/8" x 4"	1	10	10
501290	30818X412	1/8" x 4-1/2"	1	10	10
501291	30818X5	1/8" x 5"	1	10	10
501292	30818X6	1/8" x 6"	1	10	10
501293	30818X8	1/8" x 8"	1	10	10
501284	30818X12	1/8" x 12"	1	10	10

ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
<b>1/4"</b> Rated maximum 188 psi at 400°F					
501282	30814XCL	1/4" x Close	1	10	10
501270	30814X112	1/4" x 1-1/2"	1	10	10
501272	30814X2	1/4" x 2"	1	10	10
501273	30814X212	1/4" x 2-1/2"	1	10	10
501274	30814X3	1/4" x 3"	1	10	10
501275	30814X312	1/4" x 3-1/2"	1	10	10
501276	30814X4	1/4" x 4"	1	5	5
501277	30814X412	1/4" x 4-1/2"	1	10	10
501278	30814X5	1/4" x 5"	1	5	5
501279	30814X512	1/4" x 5-1/2"	1	10	10
501280	30814X6	1/4" x 6"	1	10	10
501281	30814X8	1/4" x 8"	1	10	10
501269	30814X10	1/4" x 10"	1	10	10
501271	30814X12	1/4" x 12"	1	10	10

### BULK OPTIONS

506805	FNB14X3	1/4" x 3"	1	25	400
506809	FNB14X5	1/4" x 5"	1	25	400
506811	FNB14X6	1/4" x 6"	1	25	400



# BLACK STEEL NIPPLES - SCHEDULE 40 CONTINUED

**Spec:**

- Hydrostatically tested
- Steel construction
- Made to ASTM A733 specifications



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
<b>3/8"</b> Rated maximum 203 psi at 400°F					
501308	30838XCL	3/8" x Close	1	10	10
501296	30838X112	3/8" x 1-1/2"	1	10	10
501298	30838X2	3/8" x 2"	1	10	10
501299	30838X212	3/8" x 2-1/2"	1	10	10
501300	30838X3	3/8" x 3"	1	10	10
501301	30838X312	3/8" x 3-1/2"	1	10	10
501302	30838X4	3/8" x 4"	1	5	5
501303	30838X412	3/8" x 4-1/2"	1	10	10
501304	30838X5	3/8" x 5"	1	10	10
501305	30838X512	3/8" x 5-1/2"	1	10	10
501306	30838X6	3/8" x 6"	1	5	5
501307	30838X8	3/8" x 8"	1	10	10
501295	30838X10	3/8" x 10"	1	10	10
501297	30838X12	3/8" x 12"	1	10	10
<b>BULK OPTIONS</b>					
506896	FNB38XCL	3/8" x Close	1	25	400
506884	FNB38X112	3/8" x 1-1/2"	1	25	400
506886	FNB38X2	3/8" x 2"	1	25	400
506887	FNB38X212	3/8" x 2-1/2"	1	25	400
506888	FNB38X3	3/8" x 3"	1	25	400
506889	FNB38X312	3/8" x 3-1/2"	1	25	400
506890	FNB38X4	3/8" x 4"	1	25	400
506891	FNB38X412	3/8" x 4-1/2"	1	25	400
506892	FNB38X5	3/8" x 5"	1	25	300
506893	FNB38X512	3/8" x 5-1/2"	1	25	300
506894	FNB38X6	3/8" x 6"	1	25	300
506895	FNB38X8	3/8" x 8"	1	25	150
506883	FNB38X10	3/8" x 10"	1	25	100
506885	FNB38X12	3/8" x 12"	1	25	100
<b>1/2"</b> Rated maximum 214 psi at 400°F					
500854	30012XCL	1/2" x Close	1	15	15
500842	30012X112	1/2" x 1-1/2"	1	20	20
500843	30012X2	1/2" x 2"	1	25	25
500844	30012X212	1/2" x 2-1/2"	1	15	15
500845	30012X3	1/2" x 3"	1	25	25
500846	30012X312	1/2" x 3-1/2"	1	15	15
500847	30012X4	1/2" x 4"	1	20	20
500848	30012X412	1/2" x 4-1/2"	1	15	15
500849	30012X5	1/2" x 5"	1	15	15
500850	30012X512	1/2" x 5-1/2"	1	25	25
500851	30012X6	1/2" x 6"	1	15	15
501069	30212X7	1/2" x 7"	1	25	25
501070	30212X8	1/2" x 8"	1	15	15
501071	30212X9	1/2" x 9"	1	25	25
501066	30212X10	1/2" x 10"	1	15	15
501067	30212X11	1/2" x 11"	1	25	25
501068	30212X12	1/2" x 12"	1	15	15
500852	30012XASST-25	25 1/2" asstd	Box of 25	16	16
500853	30012XASST-66	66 1/2" asstd	Box of 66	2	2

ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
<b>1/2" BULK OPTIONS</b> <i>continued</i>					
506799	FNB12XCL	1/2" x Close	1	25	400
506785	FNB12X112	1/2" x 1-1/2"	1	25	400
506787	FNB12X2	1/2" x 2"	1	25	400
506788	FNB12X212	1/2" x 2-1/2"	1	25	300
506789	FNB12X3	1/2" x 3"	1	25	300
506790	FNB12X312	1/2" x 3-1/2"	1	25	300
506791	FNB12X4	1/2" x 4"	1	25	200
506792	FNB12X412	1/2" x 4-1/2"	1	25	200
506793	FNB12X5	1/2" x 5"	1	25	200
506794	FNB12X512	1/2" x 5-1/2"	1	25	200
506795	FNB12X6	1/2" x 6"	1	25	200
506796	FNB12X7	1/2" x 7"	1	25	100
506797	FNB12X8	1/2" x 8"	1	25	100
506798	FNB12X9	1/2" x 9"	1	25	100
506783	FNB12X10	1/2" x 10"	1	25	100
506784	FNB12X11	1/2" x 11"	1	25	100
506786	FNB12X12	1/2" x 12"	1	25	100
<b>3/4"</b> Rated maximum 217 psi at 400°F					
500888	30034XCL	3/4" x Close	1	15	15
500876	30034X112	3/4" x 1-1/2"	1	15	15
500877	30034X2	3/4" x 2"	1	20	20
500878	30034X212	3/4" x 2-1/2"	1	15	15
500879	30034X3	3/4" x 3"	1	15	15
500880	30034X312	3/4" x 3-1/2"	1	15	15
500881	30034X4	3/4" x 4"	1	15	15
500882	30034X412	3/4" x 4-1/2"	1	20	20
500883	30034X5	3/4" x 5"	1	20	20
500884	30034X512	3/4" x 5-1/2"	1	25	25
500885	30034X6	3/4" x 6"	1	15	15
501087	30234X7	3/4" x 7"	1	25	25
501088	30234X8	3/4" x 8"	1	10	10
501089	30234X9	3/4" x 9"	1	25	25
501084	30234X10	3/4" x 10"	1	10	10
501085	30234X11	3/4" x 11"	1	25	25
501086	30234X12	3/4" x 12"	1	15	15
500886	30034XASST-25	25 3/4" asstd	Box of 25	12	12
500887	30034XASST-66	66 3/4" asstd	Box of 66	2	2
<b>BULK OPTIONS</b>					
506882	FNB34XCL	3/4" x Close	1	25	400
506868	FNB34X112	3/4" x 1-1/2"	1	25	400
506870	FNB34X2	3/4" x 2"	1	25	300
506871	FNB34X212	3/4" x 2-1/2"	1	25	300
506872	FNB34X3	3/4" x 3"	1	25	200
506873	FNB34X312	3/4" x 3-1/2"	1	25	200
506874	FNB34X4	3/4" x 4"	1	25	150
506875	FNB34X412	3/4" x 4-1/2"	1	25	150
506876	FNB34X5	3/4" x 5"	1	25	100
506877	FNB34X512	3/4" x 5-1/2"	1	25	100
506878	FNB34X6	3/4" x 6"	1	25	100
506880	FNB34X8	3/4" x 8"	1	25	75
506866	FNB34X10	3/4" x 10"	1	25	50
<b>1"</b> Rated maximum 226 psi at 400°F					
500866	3001XCL	1" x Close	1	10	10
500855	3001X2	1" x 2"	1	10	10
500856	3001X212	1" x 2-1/2"	1	10	10
500857	3001X3	1" x 3"	1	5	5
500858	3001X312	1" x 3-1/2"	1	5	5
500859	3001X4	1" x 4"	1	10	10
500860	3001X412	1" x 4-1/2"	1	5	5
500861	3001X5	1" x 5"	1	5	5
500862	3001X512	1" x 5-1/2"	1	10	10



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
<b>1"</b>	Rated maximum 226 psi at 400°F			<i>continued</i>	
500863	3001X6	1" x 6"	1	5	5
501075	3021X7	1" x 7"	1	10	10
501076	3021X8	1" x 8"	1	5	5
501077	3021X9	1" x 9"	1	10	10
501072	3021X10	1" x 10"	1	5	5
501073	3021X11	1" x 11"	1	10	10
501074	3021X12	1" x 12"	1	5	5
500864	3001XASST-25	25 1" asstd	Box of 25	8	8
500865	3001XASST-60	60 1" asstd	Box of 60	2	2

### BULK OPTIONS

506841	FNB1XCL	1" x Close	1	25	200
506829	FNB1X2	1" x 2"	1	25	200
506830	FNB1X212	1" x 2-1/2"	1	25	150
506831	FNB1X3	1" x 3"	1	25	150
506832	FNB1X312	1" x 3-1/2"	1	25	100
506833	FNB1X4	1" x 4"	1	25	100
506834	FNB1X412	1" x 4-1/2"	1	25	100
506835	FNB1X5	1" x 5"	1	25	75
506836	FNB1X512	1" x 5-1/2"	1	25	75
506837	FNB1X6	1" x 6"	1	25	50
506838	FNB1X7	1" x 7"	1	25	50
506839	FNB1X8	1" x 8"	1	25	50
506826	FNB1X10	1" x 10"	1	20	40
506827	FNB1X11	1" x 11"	1	20	40
506828	FNB1X12	1" x 12"	1	20	40

### 1-1/4" Rated maximum 229 psi at 400°F

500841	300114XCL	1-1/4" x Close	1	5	5
500832	300114X2	1-1/4" x 2"	1	5	5
500833	300114X212	1-1/4" x 2-1/2"	1	5	5
500834	300114X3	1-1/4" x 3"	1	5	5
500835	300114X312	1-1/4" x 3-1/2"	1	5	5
500836	300114X4	1-1/4" x 4"	1	5	5
500837	300114X412	1-1/4" x 4-1/2"	1	5	5
500838	300114X5	1-1/4" x 5"	1	5	5
500839	300114X512	1-1/4" x 5-1/2"	1	5	5
500840	300114X6	1-1/4" x 6"	1	5	5
501063	302114X7	1-1/4" x 7"	1	5	5
501064	302114X8	1-1/4" x 8"	1	5	5
501060	302114X10	1-1/4" x 10"	1	5	5
501061	302114X11	1-1/4" x 11"	1	5	5
501062	302114X12	1-1/4" x 12"	1	4	4

### BULK OPTIONS

506782	FNB114XCL	1-1/4" x Close	1	25	100
506774	FNB114X4	1-1/4" x 4"	1	25	50
506778	FNB114X6	1-1/4" x 6"	1	25	50
506780	FNB114X8	1-1/4" x 8"	1	15	30
506769	FNB114X12	1-1/4" x 12"	1	30	30

### 1-1/2" Rated maximum 231 psi at 400°F

500831	300112XCL	1-1/2" x Close	1	5	5
500822	300112X2	1-1/2" x 2"	1	5	5
500823	300112X212	1-1/2" x 2-1/2"	1	5	5
500824	300112X3	1-1/2" x 3"	1	5	5
500825	300112X312	1-1/2" x 3-1/2"	1	5	5
500826	300112X4	1-1/2" x 4"	1	5	5
500827	300112X412	1-1/2" x 4-1/2"	1	5	5
500828	300112X5	1-1/2" x 5"	1	5	5
500829	300112X512	1-1/2" x 5-1/2"	1	5	5

ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
<b>1-1/2"</b>	Rated maximum 231 psi at 400°F			<i>continued</i>	
500830	300112X6	1-1/2" x 6"	1	5	5
501059	302112X8	1-1/2" x 8"	1	4	4
501057	302112X10	1-1/2" x 10"	1	5	5
501058	302112X12	1-1/2" x 12"	1	4	4

### BULK OPTIONS

506766	FNB112XCL	1-1/2" x Close	1	25	100
506760	FNB112X4	1-1/2" x 4"	1	25	50
506764	FNB112X6	1-1/2" x 6"	1	20	40
506765	FNB112X8	1-1/2" x 8"	1	15	30
506755	FNB112X12	1-1/2" x 12"	1	10	20

### 2" Rated maximum 230 psi at 400°F

500875	3002XCL	2" x Close	1	5	5
500867	3002X212	2" x 2-1/2"	1	5	5
500868	3002X3	2" x 3"	1	5	5
500869	3002X312	2" x 3-1/2"	1	5	5
500870	3002X4	2" x 4"	1	4	4
500871	3002X412	2" x 4-1/2"	1	5	5
500872	3002X5	2" x 5"	1	3	3
500873	3002X512	2" x 5-1/2"	1	5	5
500874	3002X6	2" x 6"	1	3	3
501081	3022X7	2" x 7"	1	5	5
501082	3022X8	2" x 8"	1	3	3
501083	3022X9	2" x 9"	1	5	5
501078	3022X10	2" x 10"	1	3	3
501079	3022X11	2" x 11"	1	3	3
501080	3022X12	2" x 12"	1	3	3

### BULK OPTIONS

506865	FNB2XCL	2" x Close	1	25	50
506855	FNB2X3	2" x 3"	1	25	50
506857	FNB2X4	2" x 4"	1	20	40
506859	FNB2X5	2" x 5"	1	20	40
506861	FNB2X6	2" x 6"	1	28	28
506863	FNB2X8	2" x 8"	1	18	18
506851	FNB2X10	2" x 10"	1	14	14
506853	FNB2X12	2" x 12"	1	14	14

### 2-1/2" Rated maximum 230 psi at 400°F

502477	350212XCL	2-1/2" x Close	1	1	30
502472	350212X3	2-1/2" x 3"	1	1	20
502473	350212X4	2-1/2" x 4"	1	1	15
502474	350212X512	2-1/2" x 5-1/2"	1	1	10
502475	350212X6	2-1/2" x 6"	1	1	10
502476	350212X8	2-1/2" x 8"	1	1	5
511632	350212X10	2-1/2" x 10"	1	1	5
502471	350212X12	2-1/2" x 12"	1	1	5

### 3" Rated maximum 200 psi at 400°F

502485	3503XCL	3" x Close	1	1	20
502480	3503X3	3" x 3"	1	1	15
502481	3503X4	3" x 4"	1	1	10
502482	3503X5	3" x 5"	1	1	5
502483	3503X6	3" x 6"	1	1	5
502484	3503X8	3" x 8"	1	1	5
502478	3503X10	3" x 10"	1	1	5
502479	3503X12	3" x 12"	1	1	4

### 4" Rated maximum 175 psi at 400°F

502491	3504XCL	4" x Close	1	1	10
502488	3504X4	4" x 4"	1	1	5
502489	3504X6	4" x 6"	1	1	3
502490	3504X8	4" x 8"	1	1	3
502486	3504X10	4" x 10"	1	1	2

## BLACK CUT STEEL PIPE - SCHEDULE 40

### Spec:

- Hydrostatically tested
- Steel construction
- Made to ASTM A53 specifications



Plastic End-Caps

STZ cut pipe is composed of durable, schedule 40 black steel and is hydrostatically tested and available in sizes to fit residential and light commercial gas and air applications. Our cut pipe has protective durable plastic end caps that help ensure the pipe threads remain undamaged in transport.

\*Not for use with drinking water

\*Always check your local plumbing and gas codes before starting any piping projects

ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	BUNDLE QTY
<b>1/2"</b> Rated maximum 214 psi at 400°F					
501169	30612X14	1/2" x 14"	1	5	5
501171	30612X16	1/2" x 16"	1	5	5
501172	30612X18	1/2" x 18"	1	5	5
501173	30612X24	1/2" x 24"	1	5	5
501174	30612X30	1/2" x 30"	1	5	5
501175	30612X36	1/2" x 36"	1	5	5
501177	30612X48	1/2" x 48"	1	5	5
501178	30612X60	1/2" x 60"	1	5	5
501179	30612X72	1/2" x 72"	1	5	5
501180	30612X96	1/2" x 96"	1	5	5
<b>3/4"</b> Rated maximum 217 psi at 400°F					
501194	30634X18	3/4" x 18"	1	5	5
501195	30634X24	3/4" x 24"	1	5	5
501196	30634X30	3/4" x 30"	1	5	5
501197	30634X36	3/4" x 36"	1	5	5
501198	30634X48	3/4" x 48"	1	5	5
501199	30634X60	3/4" x 60"	1	5	5
501200	30634X72	3/4" x 72"	1	5	5
<b>1"</b> Rated maximum 226 psi at 400°F					
501181	3061X18	1" x 18"	1	3	3
501182	3061X24	1" x 24"	1	3	3
501183	3061X30	1" x 30"	1	3	3
501184	3061X36	1" x 36"	1	3	3
501185	3061X48	1" x 48"	1	3	3
501186	3061X60	1" x 60"	1	3	3
501187	3061X72	1" x 72"	1	3	3

ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	BUNDLE QTY
<b>1-1/4"</b> Rated maximum 229 psi at 400°F					
501162	306114X18	1-1/4" x 18"	1	3	3
501163	306114X24	1-1/4" x 24"	1	3	3
501165	306114X36	1-1/4" x 36"	1	3	3
501166	306114X48	1-1/4" x 48"	1	3	3
501167	306114X60	1-1/4" x 60"	1	3	3
<b>1-1/2"</b> Rated maximum 231 psi at 400°F					
501155	306112X18	1-1/2" x 18"	1	3	3
501156	306112X24	1-1/2" x 24"	1	3	3
501157	306112X30	1-1/2" x 30"	1	3	3
501158	306112X36	1-1/2" x 36"	1	3	3
501159	306112X48	1-1/2" x 48"	1	3	3
501160	306112X60	1-1/2" x 60"	1	3	3
<b>2"</b> Rated maximum 230 psi at 400°F					
501188	3062X18	2" x 18"	1	2	2
501189	3062X24	2" x 24"	1	2	2
501190	3062X30	2" x 30"	1	2	2
501191	3062X36	2" x 36"	1	2	2
501193	3062X60	2" x 60"	1	2	2

## PIPE DISPLAYS



STZ Pipe can be displayed in its own custom POP displays. We have various sizes available

ITEM# 507617  
SKU# POP306R122  
For 1/2" - 2" Pipe  
UOM: 1  
ORDER MULTIPLE: 1  
MASTER QTY: 1




ITEM# 507616  
SKU# POP306R121  
For 1/2" - 1" Pipe  
UOM: 1  
ORDER MULTIPLE: 1  
MASTER QTY: 1



## BLACK MERCHANT COUPLINGS

### Spec:

- Steel construction
- ASTM A865



STZ merchant couplings are composed of durable black steel and are 100% pressure tested and protected right in the factory. They are available in an array of sizes for residential gas, air, and low pressure applications.

\*Not for use with drinking water

\*Always check your local plumbing and gas codes before starting any piping projects

ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
502135	316MCO-18	1/8"	1	10	10
502134	316MCO-14	1/4"	1	10	10
502140	316MCO-38	3/8"	1	10	10
502133	316MCO-12	1/2"	1	25	25
502139	316MCO-34	3/4"	1	25	25
502130	316MCO-1	1"	1	10	10
502132	316MCO-114	1-1/4"	1	5	5
502131	316MCO-112	1-1/2"	1	5	5
502136	316MCO-2	2"	1	5	5
502137	316MCO-212	2-1/2"	1	30	30
502138	316MCO-3	3"	1	16	16
502141	316MCO-4	4"	1	8	8



# PLUMBING

ACR Copper Fittings.....	67-68	Pipe Support .....	71-72
Flexible Couplings .....	71	Bell Hangers .....	72
Foam Insulation Tape.....	73	Boca Plates.....	72
Foam Sealant.....	73	Half Clamps .....	71
Galvanized Cut Steel Pipe.....	65	Hook Hangers .....	72
Galvanized Malleable Iron Pipe Fittings.....	56-61	J Hooks.....	71
Galvanized Steel Nipples .....	62-64	Pipe Hangers .....	72
Garden Hose Fitting/Hose End Cap.....	67	Standard Clamps .....	71
Hose Clamps.....	69	Stud Guards.....	72
Ice Maker Kit .....	73	Suspension Clamps .....	71
Merchant Couplings.....	66	Two-Hole Pipe Straps .....	72
PEX Pinch Clamps.....	70	Valves .....	66
Pinch Clamps.....	70	Threaded Ball Valve .....	66
Pinch Clamp Crimper .....	70	Press Ball Valve .....	66
Pipe Displays .....	65	Sweat Ball Valve .....	66
Pipe Repair Clamps .....	70		
One Bolt.....	70		
Two Bolt.....	70		

# GALVANIZED MALLEABLE IRON PIPE FITTINGS - CLASS 150

STZ galvanized malleable iron pipe fittings are ideal for transporting water, oil, gas, or other liquids. All fittings are coated in zinc to minimize rust and corrosion, and are available in a variety of shapes and sizes.

\*For use with residential drinking water applications

\*Always check your local plumbing and gas codes before starting any piping projects

## 90° ELBOWS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501810	311E90-18	1/8"	1	10	10
501809	311E90-14	1/4"	1	10	10
501812	311E90-38	3/8"	1	10	10
502083	313E90-12	1/2"	1	25	25
502084	313E90-34	3/4"	1	25	25
501806	311E90-1	1"	1	10	10
501808	311E90-114	1-1/4"	1	5	5
501807	311E90-112	1-1/2"	1	5	5
501811	311E90-2	2"	1	4	4
502575	351E90-212	2-1/2"	1	1	16
502576	351E90-3	3"	1	1	8

### BULK OPTIONS

506393	FMGE90-38	3/8"	1	90	360
506386	FMGE90-12	1/2"	1	50	200
506392	FMGE90-34	3/4"	1	35	105
506383	FMGE90-1	1"	1	20	60
506385	FMGE90-114	1-1/4"	1	20	40
506384	FMGE90-112	1-1/2"	1	15	30
506389	FMGE90-2	2"	1	8	16

## 90° STREET ELBOWS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- UL and FM listed
- Made in compliance to ASME standards




ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501909	311SE90-18	1/8"	1	10	10
501908	311SE90-14	1/4"	1	10	10
501912	311SE90-38	3/8"	1	10	10
501907	311SE90-12	1/2"	1	10	10
501911	311SE90-34	3/4"	1	10	10
501904	311SE90-1	1"	1	5	5
501906	311SE90-114	1-1/4"	1	5	5
501905	311SE90-112	1-1/2"	1	5	5
501910	311SE90-2	2"	1	4	4

## 90° STREET ELBOWS CONTINUED

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
502589	351SE90-3	3"	1	1	8

### BULK OPTIONS

506720	FMGSE90-38	3/8"	1	60	240
506713	FMGSE90-12	1/2"	1	60	180
506719	FMGSE90-34	3/4"	1	35	105
506710	FMGSE90-1	1"	1	45	90
506712	FMGSE90-114	1-1/4"	1	25	50
506711	FMGSE90-112	1-1/2"	1	9	27
506716	FMGSE90-2	2"	1	8	16

## 90° REDUCING ELBOWS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501873	311RE-1418	1/4" x 1/8"	1	10	10
501876	311RE-3814	3/8" x 1/4"	1	10	10
501870	311RE-1214	1/2" x 1/4"	1	25	25
501871	311RE-1238	1/2" x 3/8"	1	5	5
501875	311RE-3412	3/4" x 1/2"	1	5	5
501865	311RE-112	1" x 1/2"	1	10	10
501872	311RE-134	1" x 3/4"	1	5	5
501869	311RE-1141	1-1/4" x 1"	1	5	5
501866	311RE-1121	1-1/2" x 1"	1	5	5
501867	311RE-112114	1-1/2" x 1-1/4"	1	5	5
501874	311RE-2112	2" x 1-1/2"	1	5	5

### BULK OPTIONS

506672	FMGRE-1238	1/2" x 3/8"	1	60	240
506677	FMGRE-3412	3/4" x 1/2"	1	40	160
506673	FMGRE-134	1" x 3/4"	1	50	100
506667	FMGRE-1121	1-1/2" x 1"	1	10	40

## 45° ELBOWS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501802	311E45-18	1/8"	1	10	10
501801	311E45-14	1/4"	1	10	10
501805	311E45-38	3/8"	1	10	10
501800	311E45-12	1/2"	1	5	5
501804	311E45-34	3/4"	1	5	5
501797	311E45-1	1"	1	5	5
501799	311E45-114	1-1/4"	1	5	5
501798	311E45-112	1-1/2"	1	5	5
501803	311E45-2	2"	1	4	4

### BULK OPTIONS

506374	FMGE45-12	1/2"	1	50	200
506380	FMGE45-34	3/4"	1	40	120
506371	FMGE45-1	1"	1	20	60

## SIDE OUTLET ELBOWS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- Made in compliance to ASME standards

NSF61-4  
NSF372



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501913	311S0E-12	1/2"	1	10	10
501914	311S0E-34	3/4"	1	10	10

### BULK OPTIONS

506722	FMGSOE-12	1/2"	1	45	135
506723	FMGSOE-34	3/4"	1	20	80
117120	FMGSOE-1	1"	1	20	40

## 45° STREET ELBOWS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501900	311SE45-18	1/8"	1	10	10
501899	311SE45-14	1/4"	1	10	10
501903	311SE45-38	3/8"	1	10	10
501898	311SE45-12	1/2"	1	5	5
501902	311SE45-34	3/4"	1	5	5
501895	311SE45-1	1"	1	10	10
501897	311SE45-114	1-1/4"	1	5	5
501896	311SE45-112	1-1/2"	1	5	5
501901	311SE45-2	2"	1	5	5

### BULK OPTIONS

506704	FMGSE45-12	1/2"	1	75	225
506708	FMGSE45-34	3/4"	1	40	120
506701	FMGSE45-1	1"	1	25	75
506702	FMGSE45-112	1-1/2"	1	10	30

## COUPLINGS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501786	311CO-18	1/8"	1	10	10
501785	311CO-14	1/4"	1	10	10
501788	311CO-38	3/8"	1	5	5
502081	313CO-12	1/2"	1	25	25
502082	313CO-34	3/4"	1	20	20
501782	311CO-1	1"	1	5	5
501784	311CO-114	1-1/4"	1	5	5
501783	311CO-112	1-1/2"	1	5	5
501787	311CO-2	2"	1	4	4
511696	351CO-212	2-1/2"	1	1	24

### BULK OPTIONS

506354	FMGCO-14	1/4"	1	40	480
506353	FMGCO-12	1/2"	1	60	240
506359	FMGCO-34	3/4"	1	50	150
506350	FMGCO-1	1"	1	25	100
506352	FMGCO-114	1-1/4"	1	16	64
506351	FMGCO-112	1-1/2"	1	18	36

# GALVANIZED MALLEABLE IRON PIPE FITTINGS - CLASS 150 CONTINUED

## REDUCING COUPLINGS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501854	311RC-1418	1/4" x 1/8"	1	10	10
501864	311RC-3818	3/8" x 1/8"	1	10	10
501863	311RC-3814	3/8" x 1/4"	1	10	10
501850	311RC-1218	1/2" x 1/8"	1	25	25
501849	311RC-1214	1/2" x 1/4"	1	10	10
501851	311RC-1238	1/2" x 3/8"	1	5	5
501861	311RC-3414	3/4" x 1/4"	1	25	25
501862	311RC-3438	3/4" x 3/8"	1	25	25
501860	311RC-3412	3/4" x 1/2"	1	15	15
501853	311RC-138	1" x 3/8"	1	10	10
501841	311RC-112	1" x 1/2"	1	5	5
501852	311RC-134	1" x 3/4"	1	5	5
501847	311RC-11412	1-1/4" x 1/2"	1	5	5
501848	311RC-11434	1-1/4" x 3/4"	1	5	5
501846	311RC-1141	1-1/4" x 1"	1	5	5
501844	311RC-11212	1-1/2" x 1/2"	1	5	5
501845	311RC-11234	1-1/2" x 3/4"	1	4	4
501842	311RC-1121	1-1/2" x 1"	1	4	4
501843	311RC-112114	1-1/2" x 1-1/4"	1	3	3
501858	311RC-212	2" x 1/2"	1	5	5
501859	311RC-234	2" x 3/4"	1	5	5
501855	311RC-21	2" x 1"	1	5	5
501857	311RC-2114	2" x 1-1/4"	1	5	5
501856	311RC-2112	2" x 1-1/2"	1	5	5
502582	351RC-2122	2-1/2" x 2"	1	1	24
502583	351RC-32	3" x 2"	1	1	16
502584	351RC-3212	3" x 2-1/2"	1	1	16
502585	351RC-42	4" x 2"	1	1	8

### BULK OPTIONS

506648	FMGRC-1418	1/4" x 1/8"	1	50	600
506644	FMGRC-1218	1/2" x 1/8"	1	75	300
506643	FMGRC-1214	1/2" x 1/4"	1	75	300
506645	FMGRC-1238	1/2" x 3/8"	1	60	240
506658	FMGRC-3412	3/4" x 1/2"	1	60	180
506660	FMGRC-3438	3/4" x 3/8"	1	45	180
506635	FMGRC-112	1" x 1/2"	1	30	120
506646	FMGRC-134	1" x 3/4"	1	25	100
506641	FMGRC-11412	1-1/4" x 1/2"	1	25	75
506642	FMGRC-11434	1-1/4" x 3/4"	1	25	75
506640	FMGRC-1141	1-1/4" x 1"	1	15	60
506639	FMGRC-11234	1-1/2" x 3/4"	1	15	60
506637	FMGRC-112114	1-1/2" x 1-1/4"	1	12	48
506655	FMGRC-234	2" x 3/4"	1	12	36
506649	FMGRC-21	2" x 1"	1	12	36
506651	FMGRC-2114	2" x 1-1/4"	1	9	27
506650	FMGRC-2112	2" x 1-1/2"	1	9	27

## BUSHINGS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501755	311B-1418	1/4" x 1/8"	1	10	10
501766	311B-3818	3/8" x 1/8"	1	10	10
501765	311B-3814	3/8" x 1/4"	1	5	5
501751	311B-1218	1/2" x 1/8"	1	25	25
501750	311B-1214	1/2" x 1/4"	1	10	10
501752	311B-1238	1/2" x 3/8"	1	5	5
501763	311B-3418	3/4" x 1/8"	1	25	25
501762	311B-3414	3/4" x 1/4"	1	5	5
501764	311B-3438	3/4" x 3/8"	1	25	25
501761	311B-3412	3/4" x 1/2"	1	10	10
501745	311B-114	1" x 1/4"	1	10	10
501754	311B-138	1" x 3/8"	1	10	10
501740	311B-112	1" x 1/2"	1	5	5
501753	311B-134	1" x 3/4"	1	10	10
501748	311B-11414	1-1/4" x 1/4"	1	5	180
501747	311B-11412	1-1/4" x 1/2"	1	5	180
501749	311B-11434	1-1/4" x 3/4"	1	5	5
501746	311B-1141	1-1/4" x 1"	1	5	5
501743	311B-11212	1-1/2" x 1/2"	1	5	5
501744	311B-11234	1-1/2" x 3/4"	1	5	5
501741	311B-1121	1-1/2" x 1"	1	5	5
501742	311B-112114	1-1/2" x 1-1/4"	1	5	5
501759	311B-212	2" x 1/2"	1	5	5
501760	311B-234	2" x 3/4"	1	5	5
501756	311B-21	2" x 1"	1	5	5
501758	311B-2114	2" x 1-1/4"	1	5	5
501757	311B-2112	2" x 1-1/2"	1	5	5
502558	351B-212112	2-1/2" x 1-1/2"	1	1	64
502559	351B-2122	2-1/2" x 2"	1	1	64
502562	351B-32	3" x 2"	1	1	48
502563	351B-3212	3" x 2-1/2"	1	1	48
502564	351B-42	4" x 2"	1	1	36
502566	351B-43	4" x 3"	1	1	36

### BULK OPTIONS

506311	FMGB-1418	1/4" x 1/8"	1	120	1440
506326	FMGB-3814	3/8" x 1/4"	1	75	900
506307	FMGB-1218	1/2" x 1/8"	1	150	600
506306	FMGB-1214	1/2" x 1/4"	1	150	600
506308	FMGB-1238	1/2" x 3/8"	1	150	600
506324	FMGB-3418	3/4" x 1/8"	1	50	300
506323	FMGB-3414	3/4" x 1/4"	1	75	300
506325	FMGB-3438	3/4" x 3/8"	1	75	300
506322	FMGB-3412	3/4" x 1/2"	1	75	300
506301	FMGB-114	1" x 1/4"	1	50	200
506296	FMGB-112	1" x 1/2"	1	50	200
506309	FMGB-134	1" x 3/4"	1	50	200



## BUSHINGS CONTINUED

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
<b>BULK OPTIONS CONTINUED</b>					
506304	FMGB-11414	1-1/4" x 1/4"	1	30	120
506305	FMGB-11434	1-1/4" x 3/4"	1	30	120
506302	FMGB-1141	1-1/4" x 1"	1	30	120
506299	FMGB-11212	1-1/2" x 1/2"	1	25	75
506300	FMGB-11234	1-1/2" x 3/4"	1	25	75
506298	FMGB-112114	1-1/2" x 1-1/4"	1	25	75
506318	FMGB-234	2" x 3/4"	1	20	60
506312	FMGB-21	2" x 1"	1	20	60

## TEES

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501921	311T-18	1/8"	1	10	10
501920	311T-14	1/4"	1	10	10
501923	311T-38	3/8"	1	10	10
502085	313 T-12	1/2"	1	15	15
502086	313 T-34	3/4"	1	15	15
501917	311T-1	1"	1	10	10
501919	311T-114	1-1/4"	1	5	5
501918	311T-112	1-1/2"	1	3	3
501922	311T-2	2"	1	4	4
502591	351T-212	2-1/2"	1	1	12
502592	351T-3	3"	1	1	8

### BULK OPTIONS

506730	FMGT-14	1/4"	1	75	300
506729	FMGT-12	1/2"	1	40	120
506735	FMGT-34	3/4"	1	35	70
506727	FMGT-112	1-1/2"	1	12	24

## REDUCING TEES

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501885	311RT-121238	1/2" x 1/2" x 3/8"	1	25	25
501884	311RT-121234	1/2" x 1/2" x 3/4"	1	5	5
501892	311RT-341212	3/4" x 1/2" x 1/2"	1	5	5
501893	311RT-341234	3/4" x 1/2" x 3/4"	1	5	5
501894	311RT-343412	3/4" x 3/4" x 1/2"	1	5	5
501887	311RT-13434	1" x 3/4" x 3/4"	1	10	10
501886	311RT-1341	1" x 3/4" x 1"	1	10	10
501877	311RT-1112	1" x 1" x 1/2"	1	10	10
501881	311RT-1134	1" x 1" x 3/4"	1	10	10
501883	311RT-11411434	1-1/4" x 1-1/4" x 3/4"	1	5	5
501882	311RT-1141141	1-1/4" x 1-1/4" x 1"	1	5	5
501880	311RT-112112114	1-1/2" x 1-1/2" x 1-1/4"	1	5	5
501890	311RT-22114	2" x 2" x 1-1/4"	1	4	4
501889	311RT-22112	2" x 2" x 1-1/2"	1	4	4

### BULK OPTIONS

506689	FMGRT-121238	1/2" x 1/2" x 3/8"	1	40	160
506688	FMGRT-121234	1/2" x 1/2" x 3/4"	1	30	120
506697	FMGRT-341212	3/4" x 1/2" x 1/2"	1	25	100
506698	FMGRT-341234	3/4" x 1/2" x 3/4"	1	20	80
506700	FMGRT-343412	3/4" x 3/4" x 1/2"	1	20	80
506691	FMGRT-13434	1" x 3/4" x 3/4"	1	15	60
506690	FMGRT-1341	1" x 3/4" x 1"	1	30	60
506681	FMGRT-1112	1" x 1" x 1/2"	1	15	60
506685	FMGRT-1134	1" x 1" x 3/4"	1	12	48
506687	FMGRT-11411434	1-1/4" x 1-1/4" x 3/4"	1	20	40
506686	FMGRT-1141141	1-1/4" x 1-1/4" x 1"	1	20	40
506695	FMGRT-22114	2" x 2" x 1-1/4"	1	8	16
506694	FMGRT-22112	2" x 2" x 1-1/2"	1	8	16

## SIDE OUTLET TEES

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- Made in compliance to ASME standards

NSF61-4  
NSF372



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501916	311SOT-12	1/2"	1	25	25
<b>BULK OPTIONS</b>					
506725	FMGSOT-12	1/2"	1	25	100
116787	FMGSOT-34	3/4"	1	15	60
117099	FMGSOT-1	1"	1	20	40

# GALVANIZED MALLEABLE IRON PIPE FITTINGS - CLASS 150 CONTINUED

## UNIONS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501929	311U-18	1/8"	1	10	10
501928	311U-14	1/4"	1	10	10
501932	311U-38	3/8"	1	10	10
501927	311U-12	1/2"	1	10	10
501931	311U-34	3/4"	1	10	10
501924	311U-1	1"	1	5	5
501926	311U-114	1-1/4"	1	5	5
501925	311U-112	1-1/2"	1	5	5
501930	311U-2	2"	1	3	3
502594	351U-212	2-1/2"	1	1	12
502595	351U-3	3"	1	1	8
502596	351U-4	4"	1	1	4

### BULK OPTIONS

506742	FMGU-14	1/4"	1	20	240
506741	FMGU-12	1/2"	1	50	100
506747	FMGU-34	3/4"	1	35	70
506738	FMGU-1	1"	1	20	40
506740	FMGU-114	1-1/4"	1	15	30
506744	FMGU-2	2"	1	6	12

## CAPS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501772	311CA-18	1/8"	1	10	10
501771	311CA-14	1/4"	1	10	10
501775	311CA-38	3/8"	1	5	5
501770	311CA-12	1/2"	1	25	25
501774	311CA-34	3/4"	1	15	15
501767	311CA-1	1"	1	5	5
501769	311CA-114	1-1/4"	1	5	5
501768	311CA-112	1-1/2"	1	5	5
501773	311CA-2	2"	1	5	5
502567	351CA-212	2-1/2"	1	1	48
502568	351CA-3	3"	1	1	36
502569	351CA-4	4"	1	1	16

## CAPS CONTINUED

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
506335	FMGCA-12	1/2"	1	75	300
506341	FMGCA-34	3/4"	1	40	160
506332	FMGCA-1	1"	1	25	100
506334	FMGCA-114	1-1/4"	1	20	80
506333	FMGCA-112	1-1/2"	1	18	54
506338	FMGCA-2	2"	1	12	36

## PLUGS

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501837	311P-18	1/8"	1	10	10
501836	311P-14	1/4"	1	10	10
501840	311P-38	3/8"	1	5	5
501835	311P-12	1/2"	1	20	20
501839	311P-34	3/4"	1	10	10
501832	311P-1	1"	1	5	5
501834	311P-114	1-1/4"	1	5	5
501833	311P-112	1-1/2"	1	5	5
501838	311P-2	2"	1	5	5
502578	351P-212	2-1/2"	1	1	96
502579	351P-3	3"	1	1	72
502580	351P-4	4"	1	1	36

### BULK OPTIONS

506627	FMGP-14	1/4"	1	150	1800
506626	FMGP-12	1/2"	1	50	600
506632	FMGP-34	3/4"	1	30	360
506623	FMGP-1	1"	1	20	240
506625	FMGP-114	1-1/4"	1	40	120

## COMPRESSION COUPLINGS

### Spec:

- Rated at max. 125 psi
- Galvanized done by hot dip process, according to ASTM A153
- Made in compliance to ASME standards

NSF61-4  
NSF372



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501779	311CCL-12	1/2"	1	5	5
501781	311CCL-34	3/4"	1	5	5
501776	311CCL-1	1"	1	6	6
501778	311CCL-114	1-1/4"	1	6	6
501777	311CCL-112	1-1/2"	1	6	6
501780	311CCL-2	2"	1	4	4

## CROSSES

### Spec:

- 100% pressure tested
- Rated at max. 300 psi at 150°F or 150 psi at 300°F
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- UL and FM listed
- Made in compliance to ASME standards



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501793	311CR-14	1/4"	1	10	10
501796	311CR-38	3/8"	1	10	10
501792	311CR-12	1/2"	1	5	5
501795	311CR-34	3/4"	1	5	5
501789	311CR-1	1"	1	10	10
501791	311CR-114	1-1/4"	1	5	5
501790	311CR-112	1-1/2"	1	5	5
501794	311CR-2	2"	1	4	4

### BULK OPTIONS

506365	FMGCR-12	1/2"	1	30	90
506369	FMGCR-34	3/4"	1	20	60
506362	FMGCR-1	1"	1	15	30

## FLANGES

### Spec:

- Galvanized done by hot dip process, according to ASTM A153
- Made in compliance to ASME standards

NSF61-4  
NSF372



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501819	311F-14	1/4"	1	10	10
501822	311F-38	3/8"	1	10	10
501818	311F-12	1/2"	1	20	20
501821	311F-34	3/4"	1	20	20
501815	311F-1	1"	1	10	10
501817	311F-114	1-1/4"	1	5	5
501816	311F-112	1-1/2"	1	5	5
501820	311F-2	2"	1	4	4

### BULK OPTIONS

506609	FMGF-12	1/2"	1	25	150
506612	FMGF-34	3/4"	1	15	120
506606	FMGF-1	1"	1	15	90
506608	FMGF-114	1-1/4"	1	10	80
506607	FMGF-112	1-1/2"	1	8	32
506611	FMGF-2	2"	1	8	32

## LOCK NUTS

### Spec:

- Galvanized done by hot dip process, according to ASTM A153
- Made in compliance to ASME standards

NSF61-4  
NSF372



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
501828	311LN-18	1/8"	1	10	10
501827	311LN-14	1/4"	1	10	10
501831	311LN-38	3/8"	1	10	10
501826	311LN-12	1/2"	1	25	25
501823	311LN-1	1"	1	10	10
501825	311LN-114	1-1/4"	1	5	5
501824	311LN-112	1-1/2"	1	5	5
501829	311LN-2	2"	1	5	5

# GALVANIZED STEEL NIPPLES - SCHEDULE 40



## GALV NIPPLES Ø Sizing Chart


To scale

Size	O.D.
4"	4.50"
3"	3.50"
2-1/2"	2.875"
2"	2.375"
1-1/2"	1.90"
1-1/4"	1.66"
1"	1.315"
3/4"	1.05"
1/2"	.84"
3/8"	.675"
1/4"	.54"
1/8"	.405"

STZ nipples are the way to go when selecting water pipe for your residence. Our durable, schedule 40 galvanized steel is hydrostatically tested and available in sizes to fit residential and light commercial water applications.

\*For use with drinking water

\*Always check your local plumbing and gas codes before starting any piping projects

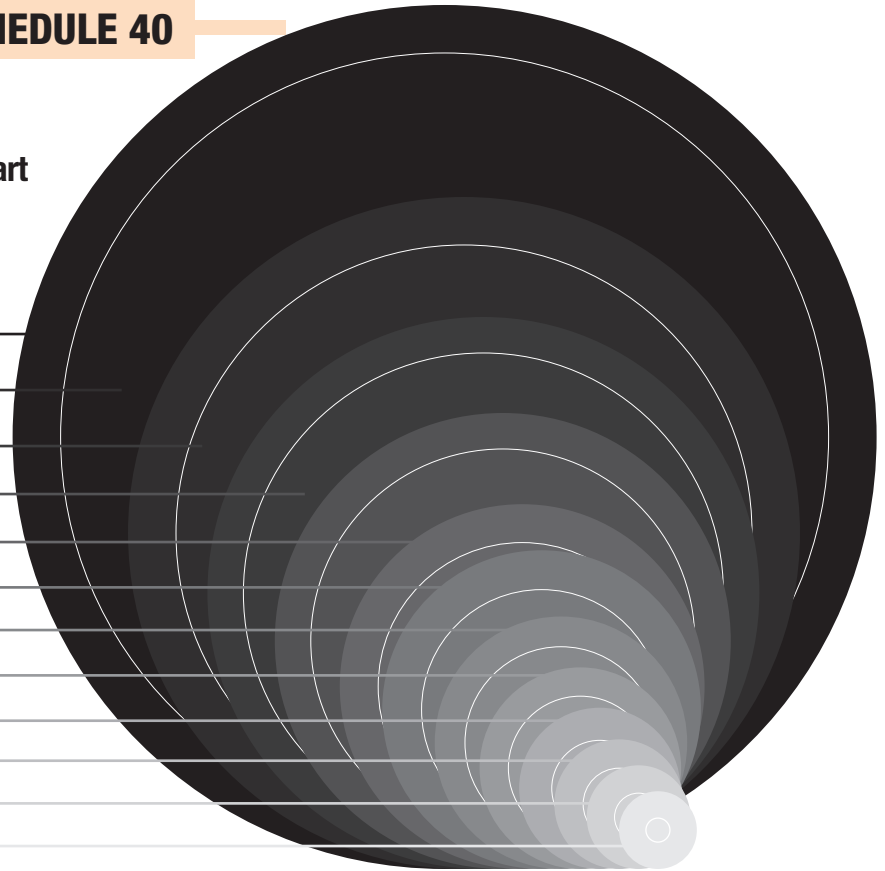

### Spec:

- Hydrostatically tested
- Steel construction
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- Made to ASTM A733 specifications

NSF61-4  
NSF372



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
<b>1/8"</b>					
501354	30918XCL	1/8" x Close	1	10	10
501342	30918X112	1/8" x 1-1/2"	1	10	10
501344	30918X2	1/8" x 2"	1	10	10
501345	30918X212	1/8" x 2-1/2"	1	10	10
501346	30918X3	1/8" x 3"	1	10	10
501347	30918X312	1/8" x 3-1/2"	1	10	10
501348	30918X4	1/8" x 4"	1	10	10
501349	30918X412	1/8" x 4-1/2"	1	10	10
501350	30918X5	1/8" x 5"	1	10	10
501351	30918X512	1/8" x 5-1/2"	1	10	10
501352	30918X6	1/8" x 6"	1	10	10
501353	30918X8	1/8" x 8"	1	10	10
501341	30918X10	1/8" x 10"	1	10	10
501343	30918X12	1/8" x 12"	1	10	10

### BULK OPTIONS

507043	FNG18XCL	1/8" x Close	1	25	400
507037	FNG18X412	1/8" x 4-1/2"	1	25	400
507028	FNG18X10	1/8" x 10"	1	25	200

ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
<b>1/4"</b> Rated maximum 188 psi at 400°F					
501340	30914XCL	1/4" x Close	1	10	10
501328	30914X112	1/4" x 1-1/2"	1	10	10
501330	30914X2	1/4" x 2"	1	10	10
501331	30914X212	1/4" x 2-1/2"	1	10	10
501332	30914X3	1/4" x 3"	1	10	10
501333	30914X312	1/4" x 3-1/2"	1	10	10
501334	30914X4	1/4" x 4"	1	10	10
501335	30914X412	1/4" x 4-1/2"	1	10	10
501336	30914X5	1/4" x 5"	1	10	10
501337	30914X512	1/4" x 5-1/2"	1	10	10
501338	30914X6	1/4" x 6"	1	10	10
501339	30914X8	1/4" x 8"	1	10	10
501326	30914X10	1/4" x 10"	1	10	10
501327	30914X11	1/4" x 11"	1	10	10
501329	30914X12	1/4" x 12"	1	10	10

### BULK OPTIONS

507019	FNG14X3	1/4" x 3"	1	25	400
507023	FNG14X5	1/4" x 5"	1	25	400
507024	FNG14X512	1/4" x 5-1/2"	1	25	400
507025	FNG14X6	1/4" x 6"	1	25	400
507013	FNG14X10	1/4" x 10"	1	25	200

### 3/8"

Rated maximum 203 psi at 400°F					
501369	30938XCL	3/8" x Close	1	10	10
501356	30938X112	3/8" x 1-1/2"	1	10	10
501358	30938X2	3/8" x 2"	1	10	10
501359	30938X212	3/8" x 2-1/2"	1	10	10

ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
<b>3/8"</b>	Rated maximum 203 psi at 400°F			<i>continued</i>	
501360	30938X3	3/8" x 3"	1	10	10
501361	30938X312	3/8" x 3-1/2"	1	10	10
501362	30938X4	3/8" x 4"	1	5	5
501363	30938X412	3/8" x 4-1/2"	1	10	10
501364	30938X5	3/8" x 5"	1	5	5
501365	30938X512	3/8" x 5-1/2"	1	10	10
501366	30938X6	3/8" x 6"	1	5	5
501367	30938X7	3/8" x 7"	1	10	10
501368	30938X8	3/8" x 8"	1	10	10
501355	30938X10	3/8" x 10"	1	10	10
501357	30938X12	3/8" x 12"	1	10	10

**BULK OPTIONS**

507107	FNG38X4	3/8" x 4"	1	25	400
507109	FNG38X5	3/8" x 5"	1	25	300

**1/2"** Rated maximum 214 psi at 400°F

500963	30112XCL	1/2" x Close	1	20	20
500951	30112X112	1/2" x 1-1/2"	1	20	20
500952	30112X2	1/2" x 2"	1	15	15
500953	30112X212	1/2" x 2-1/2"	1	15	15
500954	30112X3	1/2" x 3"	1	20	20
500955	30112X312	1/2" x 3-1/2"	1	10	10
500956	30112X4	1/2" x 4"	1	15	15
500957	30112X412	1/2" x 4-1/2"	1	15	15
500958	30112X5	1/2" x 5"	1	15	15
500959	30112X512	1/2" x 5-1/2"	1	25	25
500960	30112X6	1/2" x 6"	1	20	20
501117	30312X7	1/2" x 7"	1	25	25
501118	30312X8	1/2" x 8"	1	15	15
501119	30312X9	1/2" x 9"	1	25	25
501114	30312X10	1/2" x 10"	1	15	15
501115	30312X11	1/2" x 11"	1	25	25
501116	30312X12	1/2" x 12"	1	15	15
500962	30112XASST-25	25 1/2" asstd	Box of 25	16	16

**BULK OPTIONS**

507012	FNG12XCL	1/2" x Close	1	25	400
506997	FNG12X112	1/2" x 1-1/2"	1	25	400
506999	FNG12X2	1/2" x 2"	1	25	400
507000	FNG12X212	1/2" x 2-1/2"	1	25	300
507001	FNG12X3	1/2" x 3"	1	25	300
507002	FNG12X312	1/2" x 3-1/2"	1	25	300
507003	FNG12X4	1/2" x 4"	1	25	200
507004	FNG12X412	1/2" x 4-1/2"	1	25	200
507005	FNG12X5	1/2" x 5"	1	25	200
507006	FNG12X512	1/2" x 5-1/2"	1	25	200
507007	FNG12X6	1/2" x 6"	1	25	200
507009	FNG12X7	1/2" x 7"	1	25	100
507010	FNG12X8	1/2" x 8"	1	25	100
507011	FNG12X9	1/2" x 9"	1	25	100
506995	FNG12X10	1/2" x 10"	1	25	100
506996	FNG12X11	1/2" x 11"	1	25	100
506998	FNG12X12	1/2" x 12"	1	25	100

**3/4"** Rated maximum 217 psi at 400°F

500995	30134XCL	3/4" x Close	1	15	15
500984	30134X112	3/4" x 1-1/2"	1	15	15
500985	30134X2	3/4" x 2"	1	10	10

ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
<b>3/4"</b>	Rated maximum 217 psi at 400°F			<i>continued</i>	
500986	30134X212	3/4" x 2-1/2"	1	15	15
500987	30134X3	3/4" x 3"	1	15	15
500988	30134X312	3/4" x 3-1/2"	1	15	15
500989	30134X4	3/4" x 4"	1	10	10
500990	30134X412	3/4" x 4-1/2"	1	10	10
500991	30134X5	3/4" x 5"	1	5	5
500992	30134X512	3/4" x 5-1/2"	1	25	25
500993	30134X6	3/4" x 6"	1	10	10
501135	30334X7	3/4" x 7"	1	25	25
501136	30334X8	3/4" x 8"	1	10	10
501137	30334X9	3/4" x 9"	1	25	25
501132	30334X10	3/4" x 10"	1	10	10
501133	30334X11	3/4" x 11"	1	25	25
501134	30334X12	3/4" x 12"	1	10	10
500994	30134XASST-25	25 3/4" asstd	Box of 25	12	12

**BULK OPTIONS**

507099	FNG34XCL	3/4" x Close	1	25	400
507085	FNG34X112	3/4" x 1-1/2"	1	25	400
507087	FNG34X2	3/4" x 2"	1	25	300
507088	FNG34X212	3/4" x 2-1/2"	1	25	300
507089	FNG34X3	3/4" x 3"	1	25	200
507090	FNG34X312	3/4" x 3-1/2"	1	25	200
507091	FNG34X4	3/4" x 4"	1	25	150
507092	FNG34X412	3/4" x 4-1/2"	1	25	150
507093	FNG34X5	3/4" x 5"	1	25	100
507094	FNG34X512	3/4" x 5-1/2"	1	25	100
507095	FNG34X6	3/4" x 6"	1	25	100
507097	FNG34X8	3/4" x 8"	1	25	75
507083	FNG34X10	3/4" x 10"	1	25	50
507086	FNG34X12	3/4" x 12"	1	25	50

**1"** Rated maximum 226 psi at 400°F

500974	3011XCL	1" x Close	1	5	5
500964	3011X2	1" x 2"	1	10	10
500965	3011X212	1" x 2-1/2"	1	10	10
500966	3011X3	1" x 3"	1	5	5
500967	3011X312	1" x 3-1/2"	1	10	10
500968	3011X4	1" x 4"	1	10	10
500969	3011X412	1" x 4-1/2"	1	10	10
500970	3011X5	1" x 5"	1	5	5
500971	3011X512	1" x 5-1/2"	1	10	10
500972	3011X6	1" x 6"	1	5	5
501123	3031X7	1" x 7"	1	10	10
501124	3031X8	1" x 8"	1	5	5
501125	3031X9	1" x 9"	1	10	10
501120	3031X10	1" x 10"	1	5	5
501121	3031X11	1" x 11"	1	10	10
501122	3031X12	1" x 12"	1	5	5
500973	30111XASST-25	25 1" asstd	Box of 25	8	8

**BULK OPTIONS**

507059	FNG1XCL	1" x Close	1	25	200
507047	FNG1X2	1" x 2"	1	25	200
507049	FNG1X3	1" x 3"	1	25	150
507050	FNG1X312	1" x 3-1/2"	1	25	100
507051	FNG1X4	1" x 4"	1	25	100
507054	FNG1X512	1" x 5-1/2"	1	25	75

# GALVANIZED STEEL NIPPLES - SCHEDULE 40 CONTINUED

ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
<b>1"</b>	Rated maximum 226 psi at 400°F			<i>continued</i>	

## BULK OPTIONS CONTINUED

507055	FNG1X6	1" x 6"	1	25	50
507057	FNG1X8	1" x 8"	1	25	50
507044	FNG1X10	1" x 10"	1	20	40
507046	FNG1X12	1" x 12"	1	20	40

## 1-1/4" Rated maximum 229 psi at 400°F

500950	301114XCL	1-1/4" x Close	1	5	5
500941	301114X2	1-1/4" x 2"	1	5	5
500942	301114X212	1-1/4" x 2-1/2"	1	5	5
500943	301114X3	1-1/4" x 3"	1	5	5
500944	301114X312	1-1/4" x 3-1/2"	1	5	5
500945	301114X4	1-1/4" x 4"	1	5	5
500946	301114X412	1-1/4" x 4-1/2"	1	5	5
500947	301114X5	1-1/4" x 5"	1	5	5
500948	301114X512	1-1/4" x 5-1/2"	1	5	5
500949	301114X6	1-1/4" x 6"	1	5	5
501111	303114X7	1-1/4" x 7"	1	5	5
501112	303114X8	1-1/4" x 8"	1	5	5
501113	303114X9	1-1/4" x 9"	1	5	5
501108	303114X10	1-1/4" x 10"	1	5	5
501109	303114X11	1-1/4" x 11"	1	5	5
501110	303114X12	1-1/4" x 12"	1	5	5

## BULK OPTIONS

506984	FNG114X3	1-1/4" x 4"	1	25	100
--------	----------	-------------	---	----	-----

## 1-1/2" Rated maximum 229 psi at 400°F

500940	301112XCL	1-1/2" x Close	1	5	5
500931	301112X2	1-1/2" x 2"	1	5	5
500932	301112X212	1-1/2" x 2-1/2"	1	5	5
500933	301112X3	1-1/2" x 3"	1	5	5
500934	301112X312	1-1/2" x 3-1/2"	1	5	5
500935	301112X4	1-1/2" x 4"	1	5	5
500936	301112X412	1-1/2" x 4-1/2"	1	5	5
500937	301112X5	1-1/2" x 5"	1	5	5
500938	301112X512	1-1/2" x 5-1/2"	1	5	5
500939	301112X6	1-1/2" x 6"	1	5	5
501105	303112X7	1-1/2" x 7"	1	5	5
501106	303112X8	1-1/2" x 8"	1	5	5
501107	303112X9	1-1/2" x 9"	1	5	5
501102	303112X10	1-1/2" x 10"	1	5	5
501103	303112X11	1-1/2" x 11"	1	5	5
501104	303112X12	1-1/2" x 12"	1	5	5

## 2" Rated maximum 230 psi at 400°F

500983	301 2XCL	2" x Close	1	5	5
500975	301 2X212	2" x 2-1/2"	1	5	5
500976	301 2X3	2" x 3"	1	5	5
500977	301 2X312	2" x 3-1/2"	1	5	5
500978	301 2X4	2" x 4"	1	5	5
500979	301 2X412	2" x 4-1/2"	1	5	5
500980	301 2X5	2" x 5"	1	3	3
500981	301 2X512	2" x 5-1/2"	1	5	5

ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
<b>2"</b>	Rated maximum 230 psi at 400°F			<i>continued</i>	

500982	301 2X6	2" x 6"	1	3	3
501129	303 2X7	2" x 7"	1	5	5
501130	303 2X8	2" x 8"	1	2	2
501131	303 2X9	2" x 9"	1	5	5
501126	303 2X10	2" x 10"	1	3	3
501127	303 2X11	2" x 11"	1	3	3
501128	303 2X12	2" x 12"	1	3	3

## BULK OPTIONS

507072	FNG2X3	2" x 3"	1	25	50
507074	FNG2X4	2" x 4"	1	20	40
507078	FNG2X6	2" x 6"	1	28	28
507080	FNG2X8	2" x 8"	1	18	18

## 2-1/2" Rated maximum 230 psi at 400°F

502540	351 212XCL	2-1/2" x Close	1	1	30
502535	351 212X3	2-1/2" x 3"	1	1	20
502536	351 212X4	2-1/2" x 4"	1	1	15
502537	351 212X5	2-1/2" x 5"	1	1	10
502538	351 212X6	2-1/2" x 6"	1	1	10
502539	351 212X8	2-1/2" x 8"	1	1	5
502533	351212X10	2-1/2" x 10"	1	1	5
502534	351212X12	2-1/2" x 12"	1	1	5

## 3" Rated maximum 200 psi at 400°F

502543	351 3X3	3" x 3"	1	1	15
502544	351 3X312	3" x 3-1/2"	1	1	10
502545	351 3X4	3" x 4"	1	1	10
502547	351 3X5	3" x 5"	1	1	5
502549	351 3X8	3" x 8"	1	1	5
502541	351 3X10	3" x 10"	1	1	5
502542	351 3X12	3" x 12"	1	1	4

## 4" Rated maximum 175 psi at 400°F

502557	351 4XCL	4" x Close	1	1	10
502553	351 4X4	4" x 4"	1	1	5
502554	351 4X5	4" x 5"	1	1	5
502555	351 4X6	4" x 6"	1	1	3
502556	351 4X8	4" x 8"	1	1	3
502551	351 4X10	4" x 10"	1	1	2
502552	351 4X12	4" x 12"	1	1	2



# GALVANIZED CUT STEEL PIPE - SCHEDULE 40

STZ cut pipe is the way to go when selecting water pipe for your residence. Our durable, schedule 40 galvanized steel is hydrostatically tested and available in sizes to fit residential and light commercial water applications. Our cut pipe has protective durable plastic end caps that help ensure the pipe threads remain undamaged in transport.

\*For use with drinking water

\*Always check your local plumbing and gas codes before starting any piping projects

## Spec:

- Hydrostatically tested
- Steel construction
- Galvanized done by hot dip process, according to ASTM A153
- Certified to NSF 61 & Lead Free Law
- Made to ASTM A53 specifications

NSF61-4  
NSF372



Plastic End-Caps

ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	BUNDLE QTY
<b>1/2"</b> Rated maximum 214 psi at 400°F					
501234	307 12X18	1/2" x 18"	1	5	5
501235	307 12X24	1/2" x 24"	1	5	5
501236	307 12X30	1/2" x 30"	1	5	5
501237	307 12X36	1/2" x 36"	1	5	5
501239	307 12X48	1/2" x 48"	1	5	5
501240	307 12X60	1/2" x 60"	1	5	5
501241	307 12X72	1/2" x 72"	1	5	5
<b>3/4"</b> Rated maximum 230 psi at 400°F					
501255	307 34X18	3/4" x 18"	1	5	5
501256	307 34X24	3/4" x 24"	1	5	5
501257	307 34X30	3/4" x 30"	1	5	5
501258	307 34X36	3/4" x 36"	1	5	5
501259	307 34X48	3/4" x 48"	1	5	5
501260	307 34X60	3/4" x 60"	1	5	5
501261	307 34X72	3/4" x 72"	1	5	5
<b>1"</b> Rated maximum 226 psi at 400°F					
501242	307 1X18	1" x 18"	1	3	3
501243	307 1X24	1" x 24"	1	3	3
501244	307 1X30	1" x 30"	1	3	3
501245	307 1X36	1" x 36"	1	3	3
501246	307 1X48	1" x 48"	1	3	3
501247	307 1X60	1" x 60"	1	3	3

ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	BUNDLE QTY
<b>1-1/4"</b> Rated maximum 229 psi at 400°F					
501227	307 114X18	1-1/4" x 18"	1	3	3
501228	307 114X24	1-1/4" x 24"	1	3	3
501229	307 114X30	1-1/4" x 30"	1	3	3
501230	307 114X36	1-1/4" x 36"	1	3	3
501231	307 114X48	1-1/4" x 48"	1	3	3
501232	307 114X60	1-1/4" x 60"	1	3	3
501233	307 114X72	1-1/4" x 72"	1	3	3
<b>1-1/2"</b> Rated maximum 231 psi at 400°F					
501220	307 112X18	1-1/2" x 18"	1	3	3
501221	307 112X24	1-1/2" x 24"	1	3	3
501222	307 112X30	1-1/2" x 30"	1	3	3
501223	307 112X36	1-1/2" x 36"	1	3	3
501224	307 112X48	1-1/2" x 48"	1	3	3
501225	307 112X60	1-1/2" x 60"	1	3	3
<b>2"</b> Rated maximum 230 psi at 400°F					
501249	307 2X18	2" x 18"	1	2	2
501250	307 2X24	2" x 24"	1	2	2
501251	307 2X30	2" x 30"	1	2	2
501252	307 2X36	2" x 36"	1	2	2
501254	307 2X60	2" x 60"	1	2	2

## PIPE DISPLAYS

ITEM# 507617  
SKU# POP306R122  
For 1/2" - 2" Pipe  
UOM: 1  
ORDER MULTIPLE: 1  
MASTER QTY: 1



ITEM# 507616  
SKU# POP306R121  
For 1/2" - 1" Pipe  
UOM: 1  
ORDER MULTIPLE: 1  
MASTER QTY: 1



STZ Pipe can be displayed in its own custom POP displays. We have various sizes available

## GALVANIZED MERCHANT COUPLINGS

STZ merchant couplings are 100% pressure tested and protected directly at the factory. They are available in sizes to fit residential water applications.

\*For use with drinking water

\*Always check your local plumbing and gas codes before starting any piping projects

### Spec:

- Steel construction
- Galvanized done by hot dip process, according to ASTM A153
- ASTM A865

NSF61-4  
NSF372



ITEM#	SKU#	NPS	UOM	ORDER MULTIPLE	MASTER QTY
502147	317MCO-18	1/8"	1	10	10
502146	317MCO-14	1/4"	1	10	10
502152	317MCO-38	3/8"	1	10	10
502145	317MCO-12	1/2"	1	25	25
502151	317MCO-34	3/4"	1	25	25
502142	317MCO-1	1"	1	10	10
502144	317MCO-114	1-1/4"	1	5	5
502143	317MCO-112	1-1/2"	1	5	5
502148	317MCO-2	2"	1	5	5
502149	317MCO-212	2-1/2"	1	30	30
502150	317MCO-3	3"	1	16	16
502153	317MCO-4	4"	1	8	8

## VALVES

### THREADED BALL

Cambridge threaded ball valves are ideal for connecting pipes with a threaded connection. Easy to install, they create air-tight, leak-proof seals to control the flow of fluids through small pipes.

ITEM#	SKU#	DESCRIPTION	UOM	ORDER MULTIPLE	MASTER QTY
113941	0222262-R	3/8" FIP Ball Valve	1	10	100
113299	0222263-R	1/2" FIP Ball Valve	1	10	100
113300	0222264-R	3/4" FIP Ball Valve	1	10	80
113301	0222265-R	1" FIP Ball Valve	1	48	48
113302	0222266-R	1-1/4" FIP Ball Valve	1	36	36
113303	0222267-R	1-1/2" FIP Ball Valve	1	24	24
113304	0222268-R	2" FIP Ball Valve	1	12	12



### Spec:

- Full port
- Lead-free brass
- 600 WOG
- CSA certified for natural gas .5g, 5g, 125g
- UL 842



### PRESS BALL

Cambridge press ball valves are easily installed using a crimper tool to secure the connection. No soldering needed. Because the valve is fit to the pipe through pressure, they are suitable for liquid flow, but not steam.

ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
200392	1/2"	Box of 5	10	10
200393	3/4"	Box of 5	8	8
200394	1"	Box of 5	4	4
200395	1/2"	Box of 5	4	4



### Spec:

- Made from forged brass
- Lead-free
- 250 CWP



### SWEAT BALL

Sweat ball valves are soldered to the pipe ends, providing a bubble tight shut off for both hot and cold systems. As a low friction, air tight valve, sweat ball valves require little maintenance.

ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
113297	0222280-R	1/2"	Box of 10	10	10
112846	0222281-R	3/4"	Box of 10	6	6
113298	0222282-R	1"	Box of 8	6	6
113940	0222283-R	1-1/4"	Box of 4	9	9



### Spec:

- Full port
- Lead-free brass
- 600 WOG
- CSA certified



## GARDEN HOSE FITTING

### HOSE END CAP

Use Cambridge hose end caps to cap off male garden hose threads.

#### Spec:

• Brass



ITEM#	SIZE	STYLE	UOM	ORDER MULTIPLE	MASTER QTY
200085	3/4"	Female GHT	10	50	50

## ACR COPPER FITTINGS

Cambridge ACR copper fittings are rugged and highly resistant to corrosion. They are used on refrigerant lines in HVAC systems and for hot and cold water piping. Their smooth interior helps keep water flowing without resistance while preventing particles from building up and clogging.

### COUPLINGS WITH STOP

#### Spec:

• C x C



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200235	1/4"	1/8"	1	25	2500
200140	3/8"	1/4"	1	25	2500
200236	1/2"	3/8"	1	25	1250
200244	5/8"	1/2"	1	25	1000
200141	3/4"	5/8"	1	25	500
200230	7/8"	3/4"	1	25	250
200245	1-1/8"	1"	1	10	200
200314	1-3/8"	1-1/4"	1	10	100
201005	2-1/8"	2"	1	5	40

### COUPLINGS NO STOP

#### Spec:

• C x C



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200254	7/8"	3/4"	1	10	300

## REDUCING COUPLINGS

#### Spec:

• C x C



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200624	1/2" x 3/8"	3/8" x 1/4"	1	25	1500
200330	5/8" x 1/2"	1/2" x 3/8"	1	25	1250
200255	3/4" x 5/8"	5/8" x 1/2"	1	25	500
200249	7/8" x 3/4"	3/4" x 5/8"	1	25	250
200387	1-3/8" x 1-1/8"	1-1/4" x 1"	1	10	200

#### Spec:

• FTG x C



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200616	1/2" x 3/8"	3/8" x 1/4"	1	25	1500
201006	5/8" x 1/2"	1/2" x 3/8"	1	25	1250
201007	3/4" x 5/8"	5/8" x 1/2"	1	25	500
200617	7/8" x 5/8"	3/4" x 1/2"	1	25	450
201008	7/8" x 3/4"	3/4" x 5/8"	1	25	300
200618	1-1/8" x 7/8"	1" x 3/4"	1	10	200

## 45° ELBOWS

#### Spec:

• C x C  
• 45°



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200606	3/8"	1/4"	1	25	1800
200607	1/2"	3/8"	1	25	1200
200608	5/8"	1/2"	1	25	750
200142	3/4"	5/8"	1	25	250
200143	7/8"	3/4"	1	25	250
200312	1-1/8"	1"	1	10	100
200313	1-3/8"	1-1/4"	1	10	50

## 45° STREET ELBOWS

#### Spec:

• FTG x C  
• 45°



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200250	3/4"	5/8"	1	25	250
200237	7/8"	3/4"	1	25	250

## 90° ELBOWS

### Spec:

- C x C
- 90°



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200231	5/8"	1/2"	1	25	750
200317	3/4"	5/8"	1	25	500
200145	1-1/8"	1"	1	10	100
200256	1-3/8"	1-1/4"	1	10	50

## 90° STREET ELBOWS

### Spec:

- FTG x C
- 90°



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200345	7/8"	3/4"	1	10	300
200346	1-1/8"	1"	1	10	100

## 90° LONG TURN ELBOWS

### Spec:

- C x C
- 90°



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200610	1/4"	1/8"	1	25	2000
200611	3/8"	1/4"	1	25	1500
200251	1/2"	3/8"	1	25	1000
200247	5/8"	1/2"	1	25	500
200248	3/4"	5/8"	1	25	250
200144	7/8"	3/4"	1	10	100
200232	1-1/8"	1"	1	10	50
200238	1-3/8"	1-1/4"	1	10	50
200609	1-5/8"	1-1/2"	1	5	30
200612	2-1/8"	2"	1	12	12

## 90° LONG TURN STREET ELBOWS

### Spec:

- FTG x C
- 90°



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200252	3/8"	1/4"	1	25	1500
200614	1/2"	3/8"	1	25	700
200233	5/8"	1/2"	1	25	500
200253	3/4"	5/8"	1	25	250
200234	7/8"	3/4"	1	10	100
200613	1-1/8"	1"	1	10	90
200615	1-3/8"	1-1/4"	1	10	40

## MALE ADAPTERS

### Spec:

- C x NPT



ITEM#	O.D.	I.D.	NPT	UOM	ORDER MULTIPLE	MASTER QTY
200619	5/8"	1/2"	1/2" Male	1	25	500
200620	7/8"	3/4"	3/4" Male	1	25	300
200621	1-1/8"	1"	1" Male	1	10	150

## TEES

### Spec:

- C x C x C



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
201009	3/8"	1/4"	1	25	1500
201010	1/2"	3/8"	1	25	750
201011	5/8"	1/2"	1	25	400
201012	3/4"	5/8"	1	25	250
201013	7/8"	3/4"	1	10	160
201014	1-1/8"	1"	1	10	80

## P-TRAPS



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200622	5/8"	1/2"	1	5	30
200623	1-1/8"	1"	1	10	10

## HOSE CLAMPS

### SERIES 2000 1/2" BAND

All Stainless Steel Design

ITEM#	SKU#	SAE SIZE	MINIMUM DIAMETER Inches (mm)	MAXIMUM DIAMETER Inches (mm)	UOM	ORDER MULTIPLE	MASTER QTY
106191	HC2-6S	6	7/16 (11)	25/32 (20)	Box of 10	1	100
106214	HC2-8S	8	1/2 (13)	29/32 (23)	Box of 10	1	100
106143	HC2-10S	10	9/16 (14)	1-1/16 (27)	Box of 10	1	100
106144	HC2-12S	12	11/16 (17)	1-1/4 (32)	Box of 10	1	50
106048	HC2-16S	16	13/16 (21)	1-1/2 (38)	Box of 10	1	50
106049	HC2-20S	20	13/16 (21)	1-3/4 (44)	Box of 10	1	50
105818	HC2-24S	24	1-1/16 (27)	2 (51)	Box of 10	1	50
105792	HC2-28S	28	1-5/16 (33)	2-1/4 (57)	Box of 10	1	50
105777	HC2-32S	32	1-9/16 (40)	2-1/2 (64)	Box of 10	1	50
105793	HC2-36S	36	1-13/16 (46)	2-3/4 (70)	Box of 10	1	50
106305	HC2-40S	40	2-1/16 (52)	3 (76)	Box of 10	20	20
106574	HC2-44S	44	2-5/16 (59)	3-1/4 (83)	Box of 10	20	20
105345	HC-48S	48	2-9/16 (65)	3-1/2 (89)	Box of 10	20	20
106857	HC2-52S	52	2-13/16 (71)	3-3/4 (95)	Box of 10	20	20
106845	HC2-56S	56	3-1/16 (78)	4 (102)	Box of 10	20	20
106306	HC2-64S	64	3-9/16 (90)	4-1/2 (114)	Box of 10	20	20
106307	HC2-72S	72	4-1/18 (105)	5 (127)	Box of 10	20	20
106013	HC2-80S	80	4-5/8 (117)	5-1/2 (140)	Box of 10	20	20
106198	HC2-88S	88	5-1/8 (133)	6 (152)	Box of 10	20	20
106195	HC2-96S	96	5-5/8 (143)	6-1/2 (165)	Box of 10	20	20
106304	HC2-104S	104	6-1/8 (159)	7 (178)	Box of 10	20	20



See our clamps catalog for a full selection of clamps

· Cambridge hose clamps are multi-purpose clamps used to seal hoses or pipes onto fittings  
· Easy to use and provides a tight and secure hold



**Spec:**

- Stainless Steel
- Meets or exceeds SAE J1508 Standards



Stainless steel resists corrosion, heat damage and chemical damage

## HOSE CLAMPS IN JARS

Cambridge hose clamp jars are a convenient way to display and store hose clamps. The assortments are made up of commonly used clamps.



ITEM# 106520  
SKU# CJ-HC30  
UOM: Jar of 30  
ORDER MULTIPLE: 20  
MASTER QTY: 20  
3 each SAE sizes:  
4, 6, 8, 10, 12, 16, 20, 24, 28, 32  
SAE sizes 4 & 6 have 5/16" band. All others have 1/2" band.  
Stainless steel band, zinc-plated housing and screw


## HOSE CLAMPS IN BAGS

ITEM#	SKU#	SAE SIZE	MINIMUM DIAMETER Inches	MAXIMUM DIAMETER Inches	BAND WIDTH Inches	UOM	ORDER MULTIPLE	MASTER QTY
**112667	HC14635	4	7/32	5/8	5/16	Bag of 6	12	120
*112743	HC14636	6	7/16	25/32	5/16	Bag of 6	12	120
**112745	HC14638	10	9/16	1-1/16	1/2	Bag of 6	12	120
**112744	HC14637	16	13/16	1-1/2	1/2	Bag of 6	12	120

\*Stainless steel band, housing and screw  
\*\*Stainless steel band and housing with a zinc-plated screw

## PEX PINCH CLAMPS

ITEM#	SKU#	TUBE SIZE Inches (mm)	OPEN DIAMETER mm	WIDTH Inches (mm)	UOM	ORDER MULTIPLE	MASTER QTY
108376	PEX12	1/2 (12.7)	17.5	.276 (7)	100	1	20
108377	PEX34	3/4 (19)	23.3	.354 (9)	100	1	20
109859	PEX58	5/8 (15.9)	20.8	.276 (7)	100	1	20
108375	PEX01	1 (25.4)	29.6	.394 (10)	50	1	20



### Spec:

- ASTM F2098
- Safe for potable water and radiant floor heating
- Made with heavy duty 304 stainless steel

## PINCH CLAMPS



Cambridge pinch clamps have a specialized tongue-in-groove design which provide a full 360° seal. They are ideal for both flexible and inflexible thin-walled hoses.

ITEM#	SKU#	MINIMUM DIAMETER Inches (mm)	OPEN DIAMETER Inches (mm)	WIDTH Inches (mm)	THICKNESS	UOM	ORDER MULTIPLE	MASTER QTY
106169	PEC716	.38 (9.6)	7/16 (11.3)	5 mm	0.5mm	100	1	100
106166	PEC12	.43 (10.8)	1/2 (13.3)	7 mm	0.6 mm	100	1	50
106171	PEC916	.47 (12)	9/16 (14.5)	7 mm	0.6 mm	100	1	50
106168	PEC58	.52 (13.2)	5/8 (15.7)	7 mm	0.6 mm	100	1	50
106167	PEC2332	.60 (15.3)	23/32 (18.5)	7 mm	0.6 mm	100	1	50
106170	PEC78	.76 (19.4)	7/8 (22.6)	7 mm	0.6 mm	100	1	25
106162	PEC100	.88 (22.4)	1 (25.4)	7 mm	0.6 mm	100	1	25
106165	PEC118	1 (25.4)	1-1/8 (28.6)	7 mm	0.6 mm	100	1	25
106164	PEC114	1.12 (28.4)	1-1/4 (31.6)	7 mm	0.6 mm	100	1	25

### Spec:

- Made with 100% 304 stainless steel

- Smooth-edge band prevents damage to hose
- Tamper evident design
- Custom open diameters available

## PINCH CLAMP CRIMPER

ITEM# 106244  
SKU# CSC-102  
ORDER MULTIPLE: 30  
MASTER QTY: 30



- Installs every standard pinch clamp, regardless of size
- Unique "Tab" design provides crimping access in hard-to-reach spaces
- No gauging or tool calibration necessary
- Fully compliant with ASTM F-2098 specifications
- Constructed of high quality carbon steel
- Ratcheting action to ensure a sufficient grip

## PIPE REPAIR CLAMPS

Cambridge pipe repair clamps are a quick fix to pinholes, punctures and cracks in low pressure systems.

### 1 BOLT

SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
117446	3/8" x 3"	1	6	72
117447	1/2" x 3"	1	6	72
117449	3/4" x 3"	1	6	72
117451	1" x 3"	1	6	72
117453	1-1/4" x 3"	1	6	36
117454	1-1/2" x 3"	1	3	36
117455	2" x 3"	1	6	36



### 2 BOLT

SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
117448	1/2" x 6"	1	3	36
117450	3/4" x 6"	1	3	36
117452	1" x 6"	1	3	36





# FLEXIBLE COUPLINGS

Cambridge flexible couplings are designed for above ground and underground applications. Because of their positive seal and leak proof attributes, they are used with drain, waste and vent piping. These couplings are resistant to chemicals and sewer gases and are unaffected by soil conditions. Gaskets are made with an elastomeric PVC material. Their design conforms to ASTM C1173.

### Spec:

- Gaskets are made with an elastomeric PVC material
- ASTM C1173



SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
200376	2" x 2"	1	100	100
200358	3/4" x 3/4"	1	100	100
200359	3" x 3"	1	50	50

# PIPE SUPPORT


Cambridge pipe hangers are designed to support drain, waste, and vent piping from rafters and joists. They allow for secure contraction and expansion of the piping system.

## J HOOKS



### Spec:

- Two ring-shank nails for secure installation
- Made of high impact, corrosion-proof ABS resin
- Use on all Schedule 30 and 40 piping
- Use with copper, PEX, CPVC, and other CTS/DWV sized piping
- IAPMO Listed



A	B	C	D
1/2"	5.3"	6"	0.6"
3/4"	5.7"	6.5"	0.6"
1"	6.4"	7.3"	0.8"
1-1/4"	6.5"	7.7"	0.8"
1-1/2"	8.6"	10"	1"
2"	8.6"	10.5"	1"
3"	10"	12.5"	1"
4"	10"	13"	1"


ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
108575	PH-J50T	1/2"	10	1	5
108576	PH-J75T	3/4"	10	1	5
108569	PH-J100T	1"	10	1	5
108570	PH-J125T	1-1/4"	10	1	5
108571	PH-J150T	1-1/2"	10	1	5
108572	PH-J200T	2"	10	1	5
108573	PH-J300T	3"	10	1	5
108574	PH-J400T	4"	10	1	5

# SUSPENSION CLAMPS



### Spec:

- Used to secure CTS piping in residential and commercial applications support
- Compatible with CTS copper, PEX or CPVC tube
- Split design allows for use after piping has been installed
- Ribs allow pipe to glide easily and silently when expanding and contracting
- IAPMO Listed

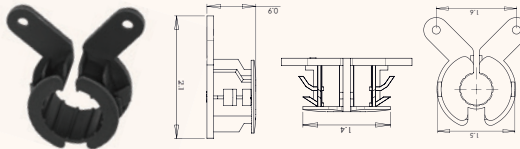

ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
108588	PH-SUSC50K	1/2"	1	50	300
108589	PH-SUSC75K	3/4"	1	50	300

# STANDARD CLAMPS




ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
108586	PH-STDC50K	1/2"	1	50	900
108587	PH-STDC75K	3/4"	1	50	300

### Spec:

- Used to secure CTS piping in residential and commercial applications support
- Split design allows for use after piping has been installed
- Ribs allow pipe to glide easily and silently when expanding and contracting
- IAPMO Listed

A	B	C	D	E
1/2"	2.1"	1.5"	0.7"	0.9"
3/4"	2.4"	1.6"	0.7"	1.2"



# HALF CLAMPS




ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
108567	PH-HC50K	1/2"	Box of 50	1	18 Boxes
108568	PH-HC75K	3/4"	Box of 50	1	18 Boxes

### Spec:

- Equipped with pre-loaded nail
- Can be used on all types of CTS piping
- IAPMO Listed

A	B	C	D	E
1/2"	0.8"	1"	0.4"	1.5"
3/4"	1.1"	1.3"	0.4"	2"



## PIPE HANGERS

Cambridge pipe hangers are made of galvanized steel and have a keyhole design which allows for faster installations.

### Spec:

- Vinyl covered galvanized steel

### Spec:

- Galvanized steel

ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
200005	2" x 12"	1	50	50
200006	3" x 12"	1	25	25

ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
108577	PH-PH150C	1-1/2"	1	100	100
108578	PH-PH200K	2"	1	50	50
108579	PH-PH300X	3"	1	25	25
108580	PH-PH400X	4"	1	25	25



## BELL HANGERS

### Spec:

- Copper-plated steel
- Equipped with two clamp screws and one mounting screw
- 13/16" support standoff



ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
108562	PH-CBH50X	1/2"	1	25	225
108563	PH-CBH75X	3/4"	1	25	225
108561	PH-CBH100X	1"	1	25	225

## HOOK HANGERS

### Spec:

- Copper-plated steel
- Secures copper PVC, CPVC, or PEX piping
- Self-nailing allows for easy and secure installation
- 6" hang



ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
108565	PH-CPH506K	1/2"	1	50	450
108566	PH-CPH756K	3/4"	1	50	450
108564	PH-CPH1006K	1"	1	50	450

## 2-HOLE PIPE STRAPS

### Spec:

- Galvanized steel
- Used to secure Schedule 40 steel and PVC pipe
- Offers strong support



SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
200495	1/2"	Bag of 10	20	120
200496	3/4"	Bag of 10	20	120
200499	1"	Bag of 5	20	160
200500	1-1/4"	Bag of 5	20	80
200497	1-1/2"	Bag of 5	20	80
200498	2"	Bag of 5	20	60
200501	3"	Bag of 5	10	40
200502	4"	Bag of 5	10	40

### Spec:

- Copper-plated steel
- Used to secure rigid copper pipe
- Offers strong support



ITEM#	SKU#	NOM. SIZE	UOM	ORDER MULTIPLE	MASTER QTY
108582	PH-PS50C	1/2"	1	100	900
108583	PH-PS75C	3/4"	1	100	900
108581	PH-PS100K	1"	1	50	450

## STUD GUARDS

### Spec:

- Made from 100% steel




ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
108771	PH-SG1505C	1-1/2" x 5"	1	200	200
108585	PH-SG1509C	1-1/2" x 9"	1	200	200

## BOCA PLATES

### Spec:

- Meets BOCA code 309.2 requirements
- Reinforces stud joists



ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
108560	PH-BPX	5" x 8"	1	50	50

## ICE MAKER KIT

Cambridge's ice maker kit supplies water to most refrigerators with automatic icemakers, humidifiers, and evaporative coolers.

### Spec:

- 1/4" x 25' copper polyethylene tubing
- Self-piercing saddle valve

ITEM# 116647 UOM: 1 ORDER MULTIPLE: 25 MASTER QTY: 25  
Includes 3 brass sleeves, 2 plastic sleeves, 3 brass nuts, 2 plastic inserts, and 1 compression fitting



## FOAM INSULATION TAPE

Cambridge insulation tape eliminates condensation from cold pipes. With its easy application and closed cell structure (low K factor), it sticks firmly to all metals and to itself, will not dry or crack, and reduces heat loss from hot pipes up to 160°F.

ITEM#	SIZE	COLOR	UOM	ORDER MULTIPLE	MASTER QTY
200460	1/8" x 2" x 30'	Black	Box of 1	1	12



## FOAM SEALANT

Use Cambridge expanding ready to use foam to fill gaps, cracks and any holes. It is better than standard caulk, with a strong adhesion and superior insulating properties. Tack-free in 10 minutes and fully cured in 12 hours. It is also paintable.

### Spec:

- Polyurethane foam
- Expands 3x when in contact with air
- Optimal can temp: 68°F
- Application temp: 28.4°F - 86°F

ITEM# 200583 UOM: 1 ORDER MULTIPLE: 12 MASTER QTY: 12  
12 oz / Can





# REFRIGERANT COMPONENTS

---

Access Fittings .....	75
Access Valves .....	75
Cap with Core Remover .....	75
Quick Seal Cap .....	75
Valve Core Replacement.....	75
ACR Copper Fittings.....	75-77
Brass Flare Fittings.....	79
Flare Elbows .....	79
Flare Union .....	79
Forged Swivel Flare Connector.....	79
Short Flared Rod Nut .....	79
Short Forged Flare Nuts.....	79
Garden Hose Fitting/Hose End Cap.....	79
Quick Connect Refrigerant Fittings.....	77-78
Refrigerant Locking Caps .....	75

## REFRIGERANT LOCKING CAPS

### Spec:

- Brass cap, aluminum shroud
- Silver color
- Meets IRC m1411.6 (tamper resistance)
- Meets IMC 1101.10 (tamper resistance)

ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
200559	1/4"	Blister of 2	20	20
200560	1/4"	Jar of 100	6	6



 Locking cap uses Allen key for convenience

## ACCESS FITTINGS

Cambridge access valve fittings are a convenient low-cost port for refrigeration servicing. They can be installed in any position on either high or low side for charging, purging, quick testing or pressure checking.

### ACCESS VALVES



ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112307	C-AVX2	1/8" O.D.	Bag of 5	10	100
200353	200353	1/8" O.D.	Bag of 6	10	100
112308	C-AVX3	3/16" O.D.	Bag of 5	10	100
200354	200354	3/16" O.D.	Bag of 6	10	100
112309	C-AVX4	1/4" O.D.	Bag of 5	10	100
112915	T14723	1/4" O.D.	Bag of 6	10	100
112310	C-AVX6	3/8" O.D.	Bag of 5	10	100
112916	T14724	3/8" O.D.	Bag of 3	20	200

### CAP WITH CORE REMOVER



ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
112311	C-QC4	1/4" O.D.	Bag of 5	20	200

### QUICK SEAL CAP



ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
200030	1/4" O.D.	12	120	120

### VALVE CORE REPLACEMENT



ITEM#	SKU#	UOM	ORDER MULTIPLE	MASTER QTY
112306	C-AVC1	Bag of 5	20	200
200147	200147	Bag of 6	20	200

## ACR COPPER FITTINGS

Cambridge ACR copper fittings are rugged and highly resistant to corrosion. They are used on refrigerant lines in HVAC systems and hot and cold water piping systems. Their smooth interior helps keep water flowing without resistance while preventing particles from building up and clogging.

### COUPLINGS WITH STOP

#### Spec:

• C x C



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200235	1/4"	1/8"	1	25	2500
200140	3/8"	1/4"	1	25	2500
200236	1/2"	3/8"	1	25	1250
200244	5/8"	1/2"	1	25	1000
200141	3/4"	5/8"	1	25	500
200230	7/8"	3/4"	1	25	250
200245	1-1/8"	1"	1	10	200
200314	1-3/8"	1-1/4"	1	10	100
201005	2-1/8"	2"	1	5	40

### COUPLINGS NO STOP

#### Spec:

• C x C



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200254	7/8"	3/4"	1	10	300

# ACR COPPER FITTINGS CONTINUED

## REDUCING COUPLINGS

Spec:

• C x C



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200624	1/2" x 3/8"	3/8" x 1/4"	1	25	1500
200330	5/8" x 1/2"	1/2" x 3/8"	1	25	1250
200255	3/4" x 5/8"	5/8" x 1/2"	1	25	500
200249	7/8" x 3/4"	3/4" x 5/8"	1	25	250
200387	1-3/8" x 1-1/8"	1-1/4" x 1"	1	10	200

Spec:

• FTG x C



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200616	1/2" x 3/8"	3/8" x 1/4"	1	25	1500
201006	5/8" x 1/2"	1/2" x 3/8"	1	25	1250
201007	3/4" x 5/8"	5/8" x 1/2"	1	25	500
200617	7/8" x 5/8"	3/4" x 1/2"	1	25	450
201008	7/8" x 3/4"	3/4" x 5/8"	1	25	300
200618	1-1/8" x 7/8"	1" x 3/4"	1	10	200

## 45° ELBOWS

Spec:

• C x C  
• 45°



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200606	3/8"	1/4"	1	25	1800
200607	1/2"	3/8"	1	25	1200
200608	5/8"	1/2"	1	25	750
200142	3/4"	5/8"	1	25	250
200143	7/8"	3/4"	1	25	250
200312	1-1/8"	1"	1	10	100
200313	1-3/8"	1-1/4"	1	10	50

## 45° STREET ELBOWS

Spec:

• FTG x C  
• 45°



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200250	3/4"	5/8"	1	25	250
200237	7/8"	3/4"	1	25	250

## 90° ELBOWS

Spec:

• C x C  
• 90°



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200231	5/8"	1/2"	1	25	750
200317	3/4"	5/8"	1	25	500
200145	1-1/8"	1"	1	10	100
200256	1-3/8"	1-1/4"	1	10	50

## 90° STREET ELBOWS

Spec:

• FTG x C  
• 90°



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200345	7/8"	3/4"	1	10	300
200346	1-1/8"	1"	1	10	100

## 90° LONG TURN ELBOWS

Spec:

• C x C  
• 90°



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200610	1/4"	1/8"	1	25	2000
200611	3/8"	1/4"	1	25	1500
200251	1/2"	3/8"	1	25	1000
200247	5/8"	1/2"	1	25	500
200248	3/4"	5/8"	1	25	250
200144	7/8"	3/4"	1	10	100
200232	1-1/8"	1"	1	10	50
200238	1-3/8"	1-1/4"	1	10	50
200609	1-5/8"	1-1/2"	1	5	30
200612	2-1/8"	2"	1	12	12

## 90° LONG TURN STREET ELBOWS

Spec:

• FTG x C  
• 90°



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200252	3/8"	1/4"	1	25	1500
200614	1/2"	3/8"	1	25	700
200233	5/8"	1/2"	1	25	500
200253	3/4"	5/8"	1	25	250
200234	7/8"	3/4"	1	10	100
200613	1-1/8"	1"	1	10	90
200615	1-3/8"	1-1/4"	1	10	40



## MALE ADAPTERS

Spec:

• C x NPT



ITEM#	O.D.	I.D.	NPT	UOM	ORDER MULTIPLE	MASTER QTY
200619	5/8"	1/2"	1/2" Male	1	25	500
200620	7/8"	3/4"	3/4" Male	1	25	300
200621	1-1/8"	1"	1" Male	1	10	150

## TEES

Spec:

• C x C x C



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
201009	3/8"	1/4"	1	25	1500
201010	1/2"	3/8"	1	25	750
201011	5/8"	1/2"	1	25	400
201012	3/4"	5/8"	1	25	250
201013	7/8"	3/4"	1	10	160
201014	1-1/8"	1"	1	10	80

## P-TRAPS



ITEM#	O.D.	I.D.	UOM	ORDER MULTIPLE	MASTER QTY
200622	5/8"	1/2"	1	5	30
200623	1-1/8"	1"	1	10	10

## QUICK CONNECT REFRIGERANT FITTINGS



Cambridge quick connect refrigerant fittings don't require any special tools to provide a tight grip. Instead, a simple push installation gets the job done safely and quickly.

## COUPLINGS



ITEM#	SKU#	SIZE	CONNECTION DIAMETER	LENGTH	OUTER DIAMETER	UOM	ORDER MULTIPLE	MASTER QTY
120184	SBC14	1/4"	0.250"	1.890"	0.787"	Box of 1	100	100
120185	SBC38	3/8"	0.375"	1.969"	0.945"	Box of 1	100	100
120186	SBC12	1/2"	0.500"	2.126"	1.063"	Box of 1	48	48
120187	SBC58	5/8"	0.625"	2.244"	1.181"	Box of 1	48	48
120188	SBC34	3/4"	0.750"	2.579"	1.457"	Box of 1	24	24
120189	SBC78	7/8"	0.875"	2.618"	1.575"	Box of 1	24	24



Spec:

- Maximum Rated Pressure: 870 PSI / 60 BAR
- Burst Pressure Rating (Minimum): 3600 PSI / 250 BAR
- Vacuum Capacity Rating: 30 microns
- Continuous Operating Temperature: 250°F / 121°C
- UL 207

## REDUCER COUPLINGS



ITEM#	SKU#	SIZE	CONNECTION DIAMETER	LENGTH	OUTER DIAMETER	UOM	ORDER MULTIPLE	MASTER QTY
120196	SBCR3814	1/4" x 3/8"	0.250"	0.375"	1.969"	Box of 1	100	100
120197	SBCR1238	3/8" x 1/2"	0.375"	0.500"	2.165"	Box of 1	100	100
120198	SBCR5812	1/2" x 5/8"	0.500"	0.625"	2.362"	Box of 1	48	48



Spec:

- Maximum Rated Pressure: 870 PSI / 60 BAR
- Burst Pressure Rating (Minimum): 3600 PSI / 250 BAR
- Vacuum Capacity Rating: 30 microns
- Continuous Operating Temperature: 250°F / 121°C
- UL 207

## 45° ELBOWS



ITEM#	SKU#	SIZE	CONNECTION DIAMETER	LENGTH	OUTER DIAMETER	UOM	ORDER MULTIPLE	MASTER QTY
120199	SBE4514	1/4"	0.250"	1.024"	7/16-20 UNF	Box of 1	100	100
120200	SBE4538	3/8"	0.375"	1.181"	5/8-18 UNF	Box of 1	100	48
120201	SBE4512	1/2"	0.500"	1.339"	3/4-16 UNF	Box of 1	48	48
120202	SBE4558	5/8"	0.625"	1.398"	7/8-14 UNF	Box of 1	48	24



### Spec:

- Maximum Rated Pressure: 870 PSI / 60 BAR
- Burst Pressure Rating (Minimum): 3600 PSI / 250 BAR
- Vacuum Capacity Rating: 30 microns
- Continuous Operating Temperature: 250°F / 121°C
- UL 207

## 90° ELBOWS



ITEM#	SKU#	SIZE	CONNECTION DIAMETER	LENGTH	OUTER DIAMETER	UOM	ORDER MULTIPLE	MASTER QTY
120190	SBE14	1/4"	0.250"	1.161"	0.787"	Box of 1	100	100
120191	SBE38	3/8"	0.375"	1.260"	0.945"	Box of 1	100	100
120192	SBE12	1/2"	0.500"	1.417"	1.063"	Box of 1	48	48
120193	SBE58	5/8"	0.625"	1.535"	1.181"	Box of 1	48	48
120194	SBE34	3/4"	0.750"	1.732"	1.457"	Box of 1	24	24
120195	SBE78	7/8"	0.875"	1.772"	1.575"	Box of 1	24	24



### Spec:

- Maximum Rated Pressure: 870 PSI / 60 BAR
- Burst Pressure Rating (Minimum): 3600 PSI / 250 BAR
- Vacuum Capacity Rating: 30 microns
- Continuous Operating Temperature: 250°F / 121°C
- UL 207

## REDUCER ELBOWS



ITEM#	SKU#	SIZE	CONNECTION DIAMETER	LENGTH	OUTER DIAMETER	CONNECTION THREAD	UOM	ORDER MULTIPLE	MASTER QTY
120207	SBER3814	1/4" x 3/8"	0.250"	0.375"	1.024"	1.181"	Box of 1	48	48
120208	SBER1238	3/8" x 1/2"	0.375"	0.500"	1.181"	1.339"	Box of 1	48	48
120209	SBER5812	1/2" x 5/8"	0.500"	0.625"	1.339"	1.398"	Box of 1	48	24



### Spec:

- Maximum Rated Pressure: 870 PSI / 60 BAR
- Burst Pressure Rating (Minimum): 3600 PSI / 250 BAR
- Vacuum Capacity Rating: 30 microns
- Continuous Operating Temperature: 250°F / 121°C
- UL 207

## FLARES



ITEM#	SKU#	SIZE	CONNECTION DIAMETER	LENGTH	OUTER DIAMETER	CONNECTION THREAD	UOM	ORDER MULTIPLE	MASTER QTY
120203	SBF14	1/4"	0.250"	1.516"	0.669"	7/16-20 UNF	Box of 1	100	100
120204	SBF38	3/8"	0.375"	1.634"	0.866"	5/8-18 UNF	Box of 1	100	100
120205	SBF12	1/2"	0.500"	1.831"	0.945"	3/4-16 UNF	Box of 1	48	48
120206	SBF58	5/8"	0.625"	2.087"	1.063"	7/8-14 UNF	Box of 1	48	48



### Spec:

- Maximum Rated Pressure: 870 PSI / 60 BAR
- Burst Pressure Rating (Minimum): 3600 PSI / 250 BAR
- Vacuum Capacity Rating: 30 microns
- Continuous Operating Temperature: 250°F / 121°C
- UL 207

## LINE MARKER

ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
120210	SBLM1458	1/4" - 5/8"	Box of 1	60	60



## DISCONNECT CLIPS

ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
120211	SBDC1458	1/4" - 5/8"	Box of 1	100	100



## LINE MARKER & DISCONNECT CLIPS

ITEM#	SKU#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
120212	SBLMDC3478	3/4" - 7/8"	Box of 1	60	60



## BRASS FLARE FITTINGS

Cambridge brass flare fittings come in different sizes in order to provide the correct gas tight fit.

### SHORT FORGED FLARE NUTS




Spec:	ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
<ul style="list-style-type: none"> <li>• SAE J513</li> <li>• Forged</li> <li>• Short type</li> <li>• Brass</li> </ul>	200347	1/4"	1	10	500
	200348	3/8"	1	10	500
	200349	1/2"	1	10	500
	200350	5/8"	1	10	500

### SHORT FLARED ROD NUT



Spec:	ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
<ul style="list-style-type: none"> <li>• SAE J513</li> <li>• Short type</li> <li>• Brass</li> </ul>	200626	3/8"	1	10	500

### FLARE ELBOWS



Spec:	ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
<ul style="list-style-type: none"> <li>• SAE J513</li> <li>• Brass</li> </ul>	200548	1/2" O.D. x 1/2" MIP	1	10	300
	200549	1/2" O.D. x 1/2" O.D.	1	10	250
	200550	3/8" O.D. x 1/2" MIP	1	10	300

### FLARE UNION



Spec:	ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
<ul style="list-style-type: none"> <li>• SAE J513</li> <li>• Brass</li> </ul>	200547	1/2" O.D. x 1/2" O.D.	1	10	300

### FORGED SWIVEL FLARE CONNECTOR

Spec:	ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
<ul style="list-style-type: none"> <li>• SAE J513</li> <li>• Forged</li> <li>• Brass</li> </ul>	200625	1/4"	1	10	250



## GARDEN HOSE FITTING

### HOSE END CAP

Use Cambridge hose end caps to cap off male garden hose threads.



Spec:	ITEM#	SIZE	STYLE	UOM	ORDER MULTIPLE	MASTER QTY
<ul style="list-style-type: none"> <li>• Brass</li> </ul>	200085	3/4"	Female GHT	10	50	50



# CONDENSATE CONTROL

Condensate Drain Line Cleaning.....	81
CO <sub>2</sub> Cartridges .....	81
Drain Cleaning Tool .....	81
Condensate Pumps.....	81
Low Profile.....	81
Regular Size .....	81
Condensate Switches .....	82
Aqua Switches .....	82
Drain Pan Mounted Switches .....	82
Pipe Mounted Switches.....	82
Drain Pans .....	82
Foam Insulation Tape.....	82
Foam Sealant.....	82
P-Trap .....	81
PVC Tubing.....	81

## CONDENSATE DRAIN LINE CLEANING

### DRAIN CLEANING TOOL

The Cambridge drain cleaning tool unclogs drain lines fast with a hard blast of oil-free air for a quick, no-mess operation. Its flexible hose assembly makes it easy to get into the awkward spots. The entire drain cleaning tool is lightweight, portable, and eco-friendly.



#### Spec:

- Fits 3/8" - 3/4" opening
- Use with threaded and non-threaded 16g CO<sub>2</sub> cartridges

ITEM#	SIZE	MASTER QTY
200558	3/8" - 3/4"	20 Pieces

### CO<sub>2</sub> CARTRIDGES

Cambridge CO<sub>2</sub> cartridges empty out condensate lines easily with their 16g capacity pushing out 800 PSI of oil-free air. Our CO<sub>2</sub> cartridges are also 100% recyclable.



#### Spec:

- 16g capacity
- Non-threaded
- Oil free CO<sub>2</sub>

ITEM#	SIZE	INNER QTY	MASTER QTY
200562	16g	Box of 12	10 Boxes

## P-TRAP

Cambridge P-traps are constructed from Schedule 40 PVC, making them resistant to corrosion. They're an excellent option for most residential, agricultural, and industrial applications.

ITEM#	SIZE	MATERIAL	MASTER QTY
200243	3/4" Slip x Slip	PVC	50 Pieces



## PVC TUBING

Cambridge clear vinyl tubing can be used for A/C and refrigeration condensate drains and condensate safe pump discharge lines.

ITEM#	SIZE	LENGTH	MASTER QTY
200042	3/8"	100'	1 Roll



## CONDENSATE PUMPS

Cambridge Condensate Pumps come in a low profile design and a regular size. They are ideal when gravity drainage is not practical due to limited space. Perfect for removal of condensate from air conditioning, refrigeration, and dehumidification equipment. They are also suitable for high-efficiency oil and gas-fired condensing furnace and condensing boiler equipment.

### LOW PROFILE

ITEM#	DESCRIPTION	VOLTAGE	UOM	ORDER MULTIPLE	MASTER QTY
201015	Low profile	115V	1	1	1
201016	Low profile	230V	1	1	1



#### Spec:

- 1/30 hp motor
- Float switch for automatic start/stop operation
- Safety switch
- 1/2-gallon tank capacity
- Motor thermal overload protection

### STANDARD

ITEM#	DESCRIPTION	VOLTAGE	UOM	ORDER MULTIPLE	MASTER QTY
201017	Standard	115V	1	1	1
201018	Standard	230V	1	1	1



#### Spec:

- 1/30 hp high-performance motor
- ABS tank, motor cover, and volute
- Stainless steel motor shaft
- 1/2-gallon tank capacity

## CONDENSATE SWITCHES

### PIPE MOUNTED SWITCHES

ITEM#	DESCRIPTION	MATERIAL	UOM	ORDER MULTIPLE	MASTER QTY
201021	Tee float switch	PVC	1	10	10
201022	Elbow float switch	PVC	1	10	10



Cambridge Pipe Mounted Switches are threaded for easy removal. The float height is adjustable to prevent it from triggering too easily. They are made of clear PVC so you can see what is going on inside.

### DRAIN PAN MOUNTED SWITCHES

ITEM#	DESCRIPTION	MATERIAL	UOM	ORDER MULTIPLE	MASTER QTY
201023	Drain pan float switch	Plastic	1	10	10



Cambridge Drain Pan Mounted Switches work with both metal and plastic drain pans. The angle and height of the float is easily adjustable to accommodate all drain pan angles and sizes.

### AQUA SWITCHES

ITEM#	DESCRIPTION	MATERIAL	UOM	ORDER MULTIPLE	MASTER QTY
201024	Condensation detection device	Plastic	1	12	48



Cambridge aqua switches prevent flooding by detecting even a drop of moisture and shutting down the AC system. A reset button is included.

## DRAIN PANS

ITEM#	SIZE	UOM	ORDER MULTIPLE	MASTER QTY
201020	27" x 48"	1	5	5
201019	30" x 30"	1	5	5
201025	30" x 60"	1	5	5



Cambridge drain pans are constructed with rolled edges which increase their durability. They have ribbed bottoms and reinforced corners that add to its strength and grip.

#### Spec:

- 3/4 inch diameter PVC discharge fitting
- Holds up to 2 inches of water
- No seams, no rust, and no leakage
- Made of Polypropylene

## FOAM INSULATION TAPE

ITEM#	SIZE	COLOR	UOM	ORDER MULTIPLE	MASTER QTY
200460	1/8" x 2" x 30'	Black	Box of 1 Roll	12	12



Cambridge insulation tape eliminates condensation from cold pipes. With its easy application and closed cell structure (low K factor), it sticks firmly to all metals and to itself, will not dry or crack, and reduces heat loss from hot pipes up to 160°F.

## FOAM SEALANT

Use Cambridge expanding ready to use foam to fill gaps, cracks and any holes. It is better than standard caulk, with a strong adhesion and superior insulating properties. Tack-free in 10 minutes and fully cured in 12 hours. It is also paintable.

ITEM# 200583  
Size: 12 oz / Can  
UOM: 1  
ORDER MULTIPLE: 12  
MASTER QTY: 12



#### Spec:

- Polyurethane foam
- Expands 3x when in contact with air
- Optimal can temp: 68°F
- Application temp: 28.4°F - 86°F







[WWW.CAMBRIDGERESOURCES.COM](http://WWW.CAMBRIDGERESOURCES.COM)

**CAMBRIDGE RESOURCES**

990 E NORTH AVENUE, GLENDALE HEIGHTS, IL 60148

PHONE: 718.927.0009 | [INFO@CAMBRIDGERESOURCES.COM](mailto:INFO@CAMBRIDGERESOURCES.COM)